


# Q-LIGHT



Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free aluminum extruded post.
- Copper-free precision die-cast aluminum housing and top cap.
- Clear UV-stabilized, high-impact resistant diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- IESNA Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.

- Pre-wired factory sealed cable for external electrical connection included.
- Steel ground base plate included for bollards.
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom post height options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

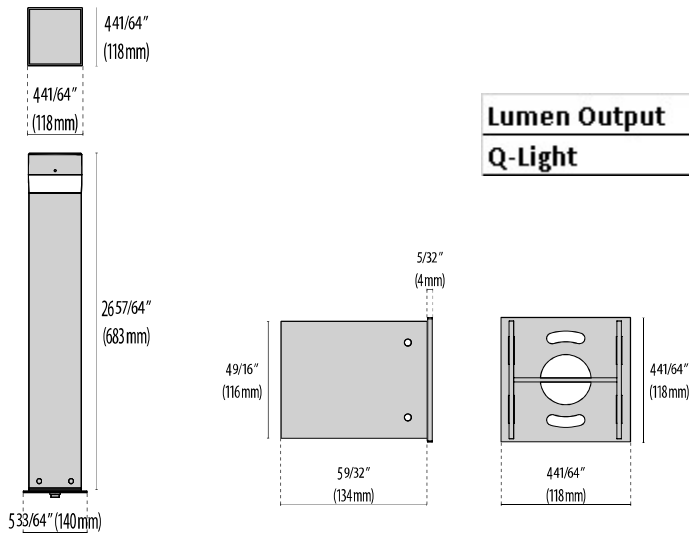

Lumen Output	27K	3K	35K	4K	5K
<b>Q-Light</b>	<b>1872</b>	<b>1944</b>	<b>2016</b>	<b>2088</b>	<b>2160</b>

**Q-LIGHT**

**BASE DETAIL**

# Order Guide - Q-Light



Order code example

QLIGHT-26-14-BK-4K-277-0-10V

QLIGHT-

Bollard Height	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
26 26 inch (standard)	<b>6</b> 6 watt	<b>AM</b> Aluminum Metallic	<b>27K</b> 2700k	<b>120</b> 120 volts	<b>NA</b> Non Dimming	<b>GFCI</b> 20 amp outlet
36 36 inch	<b>14</b> 14 watt (max)	<b>IG</b> Iron Gray	<b>3K</b> 3000k	<b>277</b> 277 volts	<b>0-10V</b> 0-10V Dimming	<b>USB</b> 4Port USB outlet
42 42 inch	<b>XX</b> Specify wattage must be below max	<b>IR</b> Iron Rust	<b>35K</b> 3500k		<b>ELV</b> ELV Dimming	<b>HSS</b> House Side Shield
<b>XX</b> Specify Height		<b>BK</b> Textured Black	<b>4K</b> 4000k			
		<b>WH</b> Textured White	<b>5K</b> 5000k			
		<b>CC</b> Custom Color	<b>65K</b> 6500k			
			<b>AMB</b> Static Amber			
		<b>RED</b> Static Red				
		<b>BLU</b> Static Blue				
		<b>GRN</b> Static Green				