

MIMIK 10 CEILING




- Ceiling mount series. Fixtures consist of:

 - Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and mounting plate.
 - Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
 - Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (TECH versions).
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
 - High-transmittance transparent optics.
- 20° x 20° beam angle (C/I).
 - 100° x 100° beam angle (TECH).
 - Input voltage: 120-277 V (50 / 60 Hz), integral driver.
 - Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
 - Product meets Buy American Act requirements within ARRA.
 - 5-year warranty.
 - Marine Grade finish.
 - Suitable for Natatorium applications.
 - DarkSky approved in 3000K or below.



- ### FINISHES

 - AN-96 / Iron gray / Textured
 - GR-94 / Aluminum metallic / Textured
 - WH-87 / White / Textured
 - BK-81 / Black / Textured
 - RB-10 / Iron rust / Textured

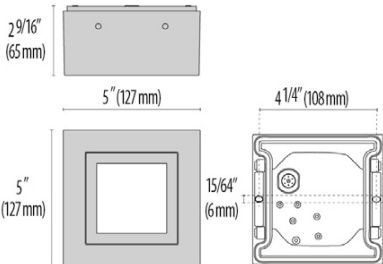

MIMIK
10 CEILING

Lumen Output	27K	3K	35K	4K	5K
Mimik 10 Ceiling C/I	555	600	645	690	735
Mimik 10 Ceiling Tech	648	701	753	806	856

10W Max Wattage

Scan here
for installation
instructions



Order Guide - MIMIK 10 CEILING




Order code example

M10C-10W-C/I-AM-3K-120-NA

M10C

Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
10W 10 watt (max) XX Specify wattage must be under max	C/I 20° Beam	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver (remote only) ELV 120V Line- Voltage Dimming Driver (remote only)	CON2 (double-gang j-box, adaptor plate and 1/2" knockouts) CON4 (double-gang j-box, adaptor plate and 3/4" knockouts) BABAA Build America Buy America Act compliant
	34 34° Beam	IG Iron Gray	3K 3000k			
	56 56° Beam	IR Iron Rust	35K 3500k			
	TECH 100°x100° Beam	BK Textured Black	4K 4000k			
		WH Textured White	5K 5000K			
		CC Custom Color	65K 6500K			
			RED Static Red			
			BLU Static Blue			
			GRN Static Green			
			RGBW RGBW* Contact factory for control details			



Conduit Entry
Jbox

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 10
04/25