

MIMIK 10 CEILING



Ceiling mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (TECH versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.

- 20° x 20° beam angle (C/I).
- 100° x 100° beam angle (TECH).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- DarkSky approved in 3000K or below.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- **AN-96** / Iron gray / Textured
- **GR-94** / Aluminum metallic / Textured
- **WH-87** / White / Textured
- **BK-81** / Black / Textured
- **RB-10** / Iron rust / Textured

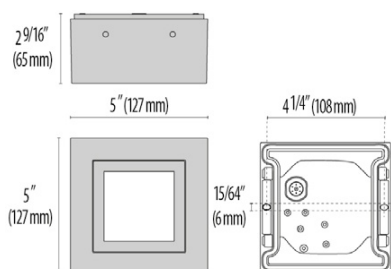

MIMIK
10 CEILING

| Lumen Output | 27K | 3K | 35K | 4K | 5K |
|-----------------------|-----|-----|-----|-----|-----|
| Mimik 10 Ceiling C/I | 555 | 600 | 645 | 690 | 735 |
| Mimik 10 Ceiling Tech | 648 | 701 | 753 | 806 | 856 |

10W Max Wattage

Scan here
for installation
instructions



Order Guide - MIMIK 10 CEILING




Order code example

M10C-10W-C/I-AM-3K-120-NA

M10C

| Wattage | Optics | Finish | Kelvin | Voltage | Controls | Accessories |
|--|--|--|--|------------------------|--|---|
| 10W 10 watt (max) XX Specify wattage must be under max | C/I 20° Beam 34 34° Beam 56 56° Beam TECH 100°x100° Beam | AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color | 27K 2700k 3K 3000k 35K 3500k 4K 4000k 5K 5000K 65K 6500K RED Static Red BLU Static Blue GRN Static Green RGBW RGBW* Contact factory for control details | UNV 120-277V | NA Non Dimming 0-10V 0-10V Dimming Driver (remote only) ELV 120V Line- Voltage Dimming Driver (remote only) | CON2 (double-gang j-box, adaptor plate and 1/2" knockouts) CON4 (double-gang j-box, adaptor plate and 3/4" knockouts) BABAA Build America Buy America Act compliant (not available for all options) |



Conduit Entry
Jbox

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 11
06/25