

# FOCUS+ 1



Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing, ring/faceplate, and adjustable mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- NEMA 4H x 3V light distribution (ELL).
- NEMA 3H x 3V light distribution (C/I).
- NEMA 4H x 4V light distribution (C/M).
- NEMA 5H x 5V light distribution (C/W).
- NEMA 3H x 7V light distribution (Type I).

- NEMA 5H x 6V light distribution (Type III).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Standard robust 1/2" NPS knuckle mount with 180° adjustable swivel arm (SA versions) and rugged, locking teeth for a simplified installation.
- Matching junction box plate optional accessory available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

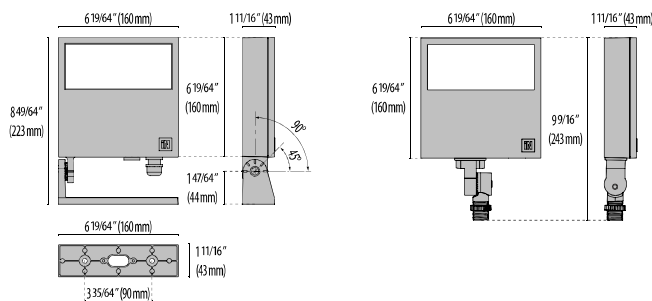

FOCUS+  
1 YO

FOCUS+  
1 SA

Lumen Output	27K	3K	35K	4K	6K
Focus+One C/I	1173	1247	1321	1395	1466
Focus+One C/M	1168	1242	1315	1389	1462
Focus+One C/W	1110	1180	1250	1320	1390
Focus+One ELL	1230	1307	1384	1462	1359
Focus+One T1	1101	1170	1239	1308	1377
Focus+One T3	1043	1108	1173	1239	1340

19W Max Wattage

Scan here  
for installation  
instructions



Revision 09  
04/25

# Order Guide - Focus+One



Order code example


F+1-YO-19-T4-AM-27K-120V-NA-FG

**F+1**

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
<b>YO</b> Yoke	<b>19</b> 19 watt (max)	<b>T1</b> Type I	<b>AM</b> Aluminum Metallic	<b>27K</b> 2700k	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming	<b>Jbox</b> Square Jbox cover
<b>SA</b> Swivel	<b>XX</b> Specify Wattage Must be below max	<b>T3</b> Type III	<b>IG</b> Iron Gray	<b>3K</b> 3000k		<b>0-10V</b> 0-10V Dimming Driver	<b>WS20</b> Wall Support 20" (yoke mount only)
		<b>C/I</b> 17" beam	<b>IR</b> Iron Rust	<b>35K</b> 3500k		<b>ELV</b> 120V Line-Voltage Dimming Driver	<b>WS40</b> Wall Support 40" (yoke mount only)
		<b>C/M</b> 34" beam	<b>BK</b> Textured Black	<b>4K</b> 4000k			<b>MC3.5</b> Mounting Collar for 3.5" Pole with Bracket
		<b>C/W</b> 56" beam	<b>WH</b> Textured White				<b>MC2.3</b> Mounting Collar For 2.3" Pole with Bracket
		<b>ELL</b> Elliptical 15"x45"	<b>CC</b> Custom Color			For more Options Contact Factory	<b>BABAA</b> Build America Buy America Act compliant

## OPTIONAL ACCESSORIES

70 CRI STANDARD - OTHER OPTIONS AVAILABLE



07959- Square Jbox Cover



14173394 - 20" Wall  
Support



14453994 - 40" Wall  
Support



14099696 - Mounting Collar  
for 3.5" Pole with 311043  
Bracket



14099896 - Mounting Collar  
for 2.3" Pole with 311043  
Bracket

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting  
www.performanceinlighting.com

Revision 09  
04/25