


FOCUS+ 2

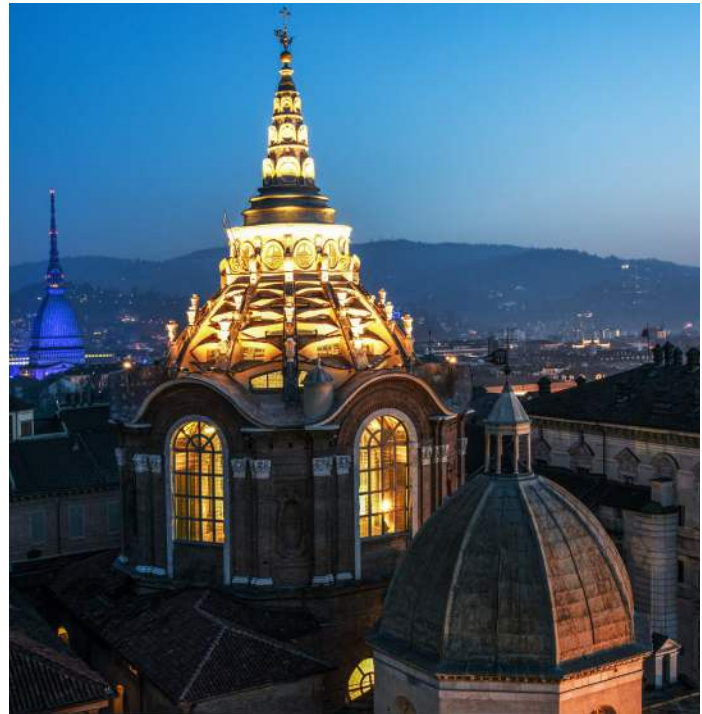

Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing, ring/faceplate, and adjustable mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- NEMA 4H x 3V light distribution (ELL).
- NEMA 3H x 3V light distribution (C/I).
- NEMA 4H x 4V light distribution (C/M).
- NEMA 5H x 5V light distribution (C/W).
- NEMA 3H x 7V light distribution (Type I).

- NEMA 5H x 7V light distribution (Type IV).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Standard robust 1/2" NPS knuckle mount with 180° adjustable swivel arm (SA versions) and rugged, locking teeth for a simplified installation.
- Matching junction box plate optional accessory available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

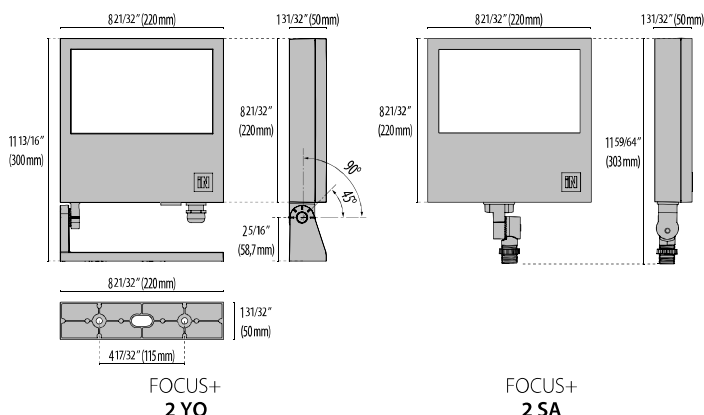

Lumen Output	27K	3K	35K	4K	6K
Focus+Two C/I	1845	1960	2074	2189	2303
Focus+Two C/M	1839	1953	2067	2181	2295
Focus+Two C/W	1718	1824	1930	2037	2143
Focus+Two ELL	1932	2052	2172	2292	2412
Focus+Two T1	1745	1853	1961	2069	2177
Focus+Two T4	1749	1857	1965	2074	2182

27W Max Wattage

Scan here
for installation
instructions



Order Guide - Focus+Two



Order code example


F+2-YO-27-T4-AM-27K-120V-NA-FG

F+2

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
YO Yoke	27 27 watt (max)	T1 Type I	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	Jbox Square Jbox cover
SA Swivel	XX Specify Wattage Must be below max	T4 Type IV	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming Driver	WS20 Wall Support 20" (yoke mount only)
		C/I 17" beam	IR Iron Rust	35K 3500k			WS40 Wall Support 40" (yoke mount only)
		C/M 34" beam	BK Textured Black	4K 4000k		ELV 120V Line-Voltage Dimming Driver	MC3.5 Mounting Collar for 3.5" Pole with Bracket
		C/W 56" beam	WH Textured White				MC2.3 Mounting Collar For 2.3" Pole with Bracket
		ELL Elliptical 15"x45"	CC Custom Color			For more Options Contact Factory	BD Barn Door Kit
							BABAA Build America Buy America Act compliant

70 CRI STANDARD - OTHER OPTIONS AVAILABLE

OPTIONAL ACCESSORIES



07959- Square Jbox Cover



14173394 - 20" Wall Support



14453994 - 40" Wall Support



14099696 - Mounting Collar for 3.5" Pole - with 311043 Bracket



14099896 - Mounting Collar for 2.3" Pole - with 311043 Bracket



Barn Door Kit

Revision 11
04/25