


FOCUS+ 3

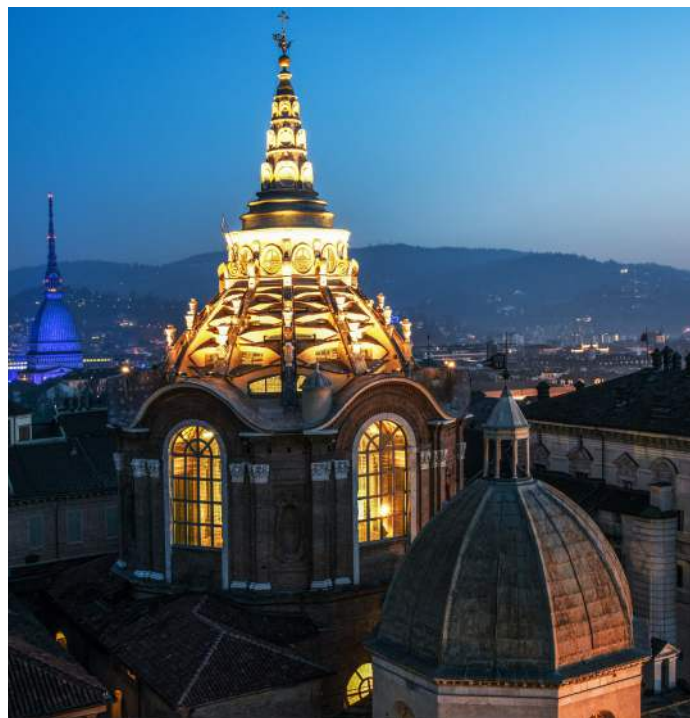

Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing, ring/faceplate, and adjustable mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- NEMA 4H x 3V light distribution (ELL).
- NEMA 3H x 3V light distribution (C/I).
- NEMA 4H x 4V light distribution (C/M).
- NEMA 5H x 5V light distribution (C/W).
- NEMA 3H x 7V light distribution (Type I).

- NEMA 5H x 7V light distribution (Type III).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Standard robust 1/2" NPS knuckle mount with 180° adjustable swivel arm (SA versions) and rugged, locking teeth for a simplified installation.
- Matching junction box plate optional accessory available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom optics options.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

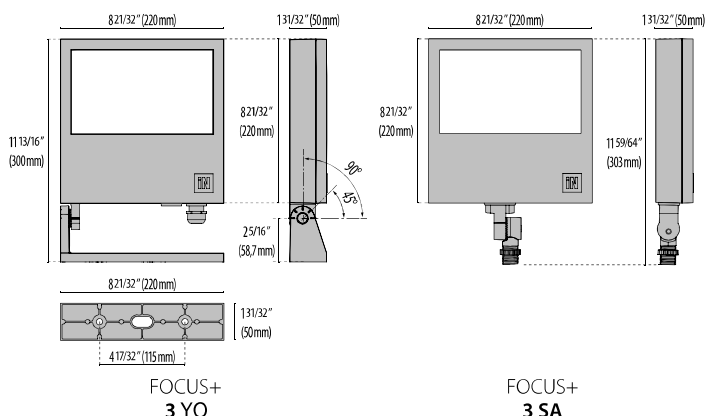

Lumen Output	27K	3K	35K	4K	6K
Focus+Three C/I	3539	3759	3979	4199	4419
Focus+Three C/M	3468	3683	3895	4114	4329
Focus+Three C/W	3248	3449	3650	3852	4053
Focus+Three ELL	3732	3964	4196	4428	4660
Focus+Three T1	3210	3409	3608	3807	4006
Focus+Three T3	3220	3420	3620	3820	4020

54W Max Wattage

Scan here
for installation
instructions



Revision 10
06/25

Order Guide - Focus+Three



Order code example


F+3-YO-54-T4-AM-27K-120V-NA-jbox

F+3

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
YO Standard	54 54 watt (max)	T1 Type I	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	Jbox Square Jbox cover
SA Swivel	XX Specify Wattage Must be below max	T3 Type III	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming Driver	WS20 Wall Support 20" (yoke mount only)
		C/I 17° beam	IR Iron Rust	35K 3500k			WS40 Wall Support 40" (yoke mount only)
		C/M 34° beam	BK Textured Black	4K 4000k		ELV 120V Line-Voltage Dimming Driver	MC3.5 Mounting Collar for 3.5" Pole
		C/W 56° beam	WH Textured White				MC2.3 Mounting Collar For 2.3" Pole
		ELL Elliptical 15"x45°	CC Custom Color				BD Barn Door Kit
						For more Options Contact Factory	BABAA Build America Buy America Act compliant (not available for all options)

OPTIONAL ACCESSORIES

70 CRI STANDARD - OTHER OPTIONS AVAILABLE



07959- Square Jbox Cover



14173394 - 20" Wall Support



14453994 - 40" Wall Support



14099696 - Mounting Collar for 3.5" Pole with 311043 Bracket



14099896 - Mounting Collar for 2.3" Pole with 311043 Bracket



Barn Door Kit