


INSERT+ ZERO




- Recessed wall steplight series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and ring/faceplate.
 - Frosted, flat, tempered silk-screened soda-lime glass diffuser.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- IESNA Type II light distribution.
 - Input voltage: 120-277 V (50 / 60 Hz), integral driver.
 - Mud Ring included for INSERT+ ZERO / ZERO CLIPS (J-Box provided by others).
 - Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
 - Product meets Buy American Act requirements within ARRA.
 - 5-year warranty.
 - Marine Grade finish.
 - Suitable for Natatorium applications.

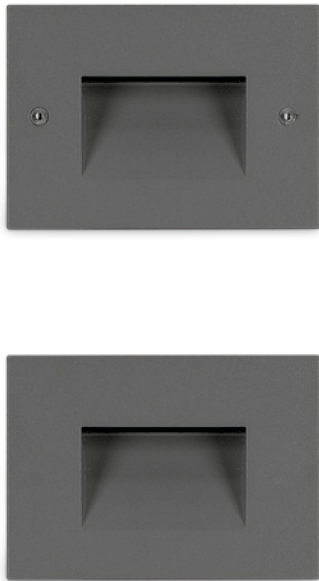


FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured



INSERT+
ZERO



INSERT+
ZERO CLIPS



Scan here
for installation
instructions

Lumen Output	27K	3K	35K	4K	5K	6K
Insert+Zero Screw 4W	134	140	146	153	159	165
Insert+Zero Screw 6W	184	188	192	196	200	204
Insert+Zero Clips 4W	154	162	170	178	186	194
Insert+Zero Clips 6W	213	217	221	225	229	233

Order Guide - Insert+Zero



Order code example

IN0-SC-6W-AM-3K-120-NA


IN0-

Housing Style	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
SC Screw Version CL Clip Version	Integral Driver Options	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming (Remote Driver Only)See Below ELV ELV Dimming (Remote Driver Only) One to One Not Available See Below	PHC* Photocell OCC* Occupancy Sensor ADP Retrofit Adaptor Plate Goof Ring* Must Provide Dimensions TP Tamper Proof hardware (Screw Version only) GFCI GFCI Outlet BABAA Build America Buy America Act compliant *Contact factory for details on non-standard installation *PHC,OCC and GFCI Requires 3-Gang Jbox
	4 4 watt		3K 3000k			
	6 6 watt (max)	IG Iron Gray	35K 3500k			
	XX Specify Wattage Must be below max	IR Iron Rust	4K 4000k			
	Remote Driver Options	BK Textured Black	5K 5000k			
	2 2 watt	WH Textured White	65K 6500k			
	3 3 watt	CC Custom Color	RED Static Red			
	4 4 watt	AMW Anti-Microbial White	GRN Static Green			
	5 5 watt		BLU Static Blue			
	6 6 watt		AMB Static Amber			
			RGBW RGBW See Below for Control Details			


80 CRI STANDARD - OTHER OPTIONS AVAILABLE

JBOX BY OTHERS
4x4x4 DOUBLE GANG BOX REQUIRED

MUDRING INCLUDED WITH FIXTURE

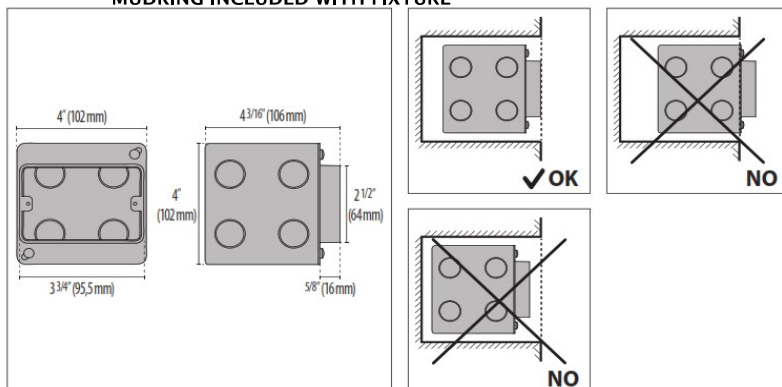

PHC Option

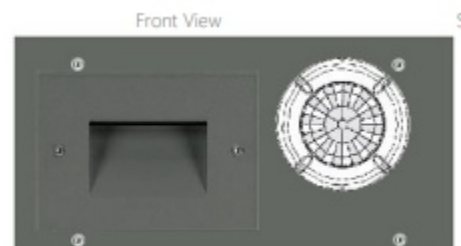

OCC Option

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 17
12/24

RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP


RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP

INSERT+ ZERO REMOTE DRIVER OPTIONS

INSERT+ZERO ELV DRIVERS (REMOTE ONLY)		
FIXT QTY	4W / 350mA	6W / 500mA
1	n/a	17385
2	17390	n/a
3	17408	17470
4	17375	17409
5	17421	n/a
INSERT+ZERO 0-10V DRIVERS (REMOTE ONLY)		
FIXT QTY	4W / 350mA	6W / 500mA
1	17191 / 17244	17385
2	17390 / 17244	17320
3	17408	17470
4	17375	17263 / 17406 / 17409
5	17421	17488-500

Revision 17
12/24