
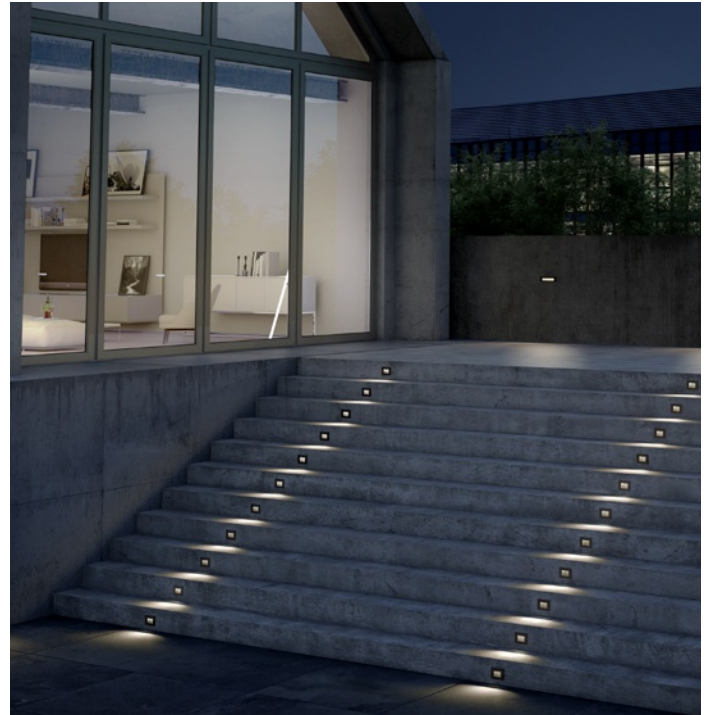


INSERT+ ZERO



Recessed wall steplight series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and ring/faceplate.
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.

- IESNA Type II light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Mud Ring included for INSERT+ ZERO / ZERO CLIPS (J-Box provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.




FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

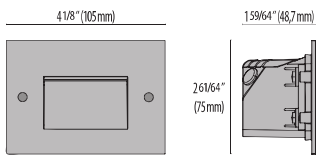

INSERT+
ZERO

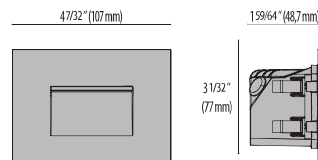

INSERT+
ZERO CLIPS



Scan here
for installation
instructions

Lumen Output	27K	3K	35K	4K	5K	6K
Insert+Zero Screw 4W	134	140	146	153	159	165
Insert+Zero Screw 6W	184	188	192	196	200	204
Insert+Zero Clips 4W	154	162	170	178	186	194
Insert+Zero Clips 6W	213	217	221	225	229	233

Order Guide - Insert+Zero





Order code example

INO-SC-6W-AM-3K-120-NA

INO-

Housing Style	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
SC Screw Version	4 4 watt	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	PHC* Photocell
	6 6 watt (max)	IG Iron Gray	3K 3000k			
CL Clip Version	XX Specify Wattage Must be below max	IR Iron Rust	35K 3500k	ELV ELV Dimming (Remote Driver Only)	0-10V 0-10V Dimming (Remote Driver Only)	OCC* Occupancy Sensor
		BK Textured Black	4K 4000k			
		WH Textured White	5K 5000k			
		CC Custom Color	65K 6500k			
		AMW Anti-Microbial White	RED Static Red			
			GRN Static Green			
	BLU Static Blue					
	AMB Static Amber					JBOX* Jbox Cover Plate
						LVR* Louver Cover
						GFCI GFCI Outlet
						Contact factory for details on non-standard installation
						PHC,OCC and GFCI Requires 3-Gang Jbox


**JBOX BY OTHERS
MUDRING INCLUDED WITH FIXTURE**

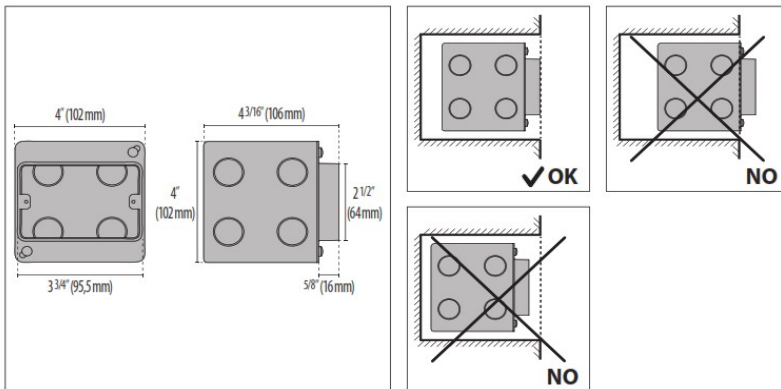

Louver Cover



PHC Option

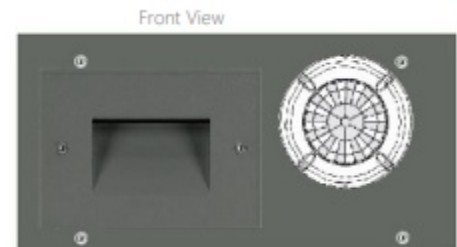

OCC Option

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

**Revision 03
11/22**