





- Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free die-cast aluminum housing, ring, and faceplates.
 - Copper-free aluminum extruded post.
 - High transmittance, internally coated, pressed glass diffuser, thermally, and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
 - Tilttable LED board mounting bracket allows for quick and easy installation.
 - 100% uniform diffused light emission.

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom signage options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

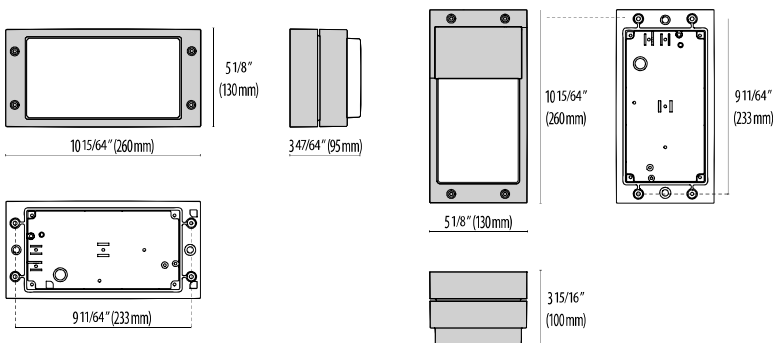

BLIZ
VISA

BLIZ
VISA/V

Lumen Output	27K	3K	35K	4K	6K
Bliz	972	995	1017	1040	1062
Bliz Guard	652	667	682	698	713
Bliz Visa	593	607	621	635	649
Bliz Visa V	639	654	669	684	699



Order Guide - Bliz

Order code example

BZ-O-AM-3K-120-NA-SIGN

Trim Style	Wattage	Finish	Color Temperature	Voltage	Controls	Accessories
O Open	19.5 19.5 Watt (max)	AM Aluminum Metallic	27K 2700k	120 120 volts	NA Non Dimming	Sign Logo/Signage
G Guard	XX Specify Wattage Must be below max	IG Iron Gray	3K 3000k	277 277 volts	0-10V 0-10V Dimming	REM Remote mounted Emergency battery back-up
V Visa		IR Iron Rust	35K 3500k			
VV Visa Vertical		BK Textured Black	4K 4000k			
		WH Textured White	RED Static Red			
		CC Custom Color	BLU Static Blue			
	GRN Static Green	AMB Amber				
			RGBW RGBW* Consult factory for control details			P20 20" Bollard
						P40 40" Bollard