

QUASAR 60



Wall sconce series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (TECH versions).
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Single (M) or dual (B) light emission.
- DarkSky approved when ordered with single light emission only, and in 3000K or below.

- IESNA Type II light distribution.
- Single (TECH) or dual (DOUBLE TECH) light emission.
- IESNA Type III light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

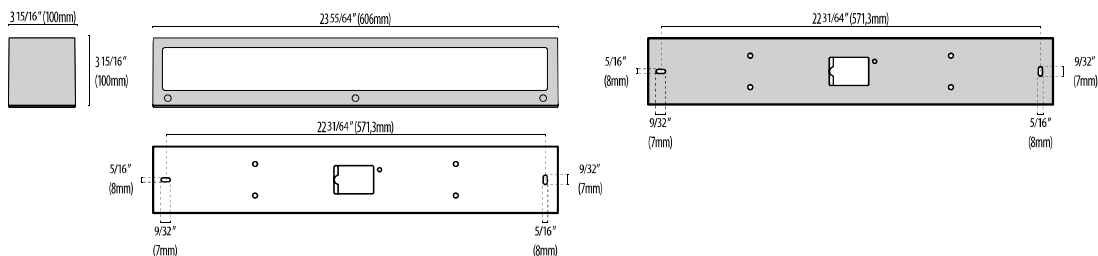

QUASAR
60



Scan here
for installation
instructions

| Lumen Output | 27K | 3K | 35K | 4K | 5K |
|-----------------------|------|------|------|------|------|
| Quasar 60 M | 1619 | 1631 | 1643 | 1655 | 1667 |
| Quasar 60 B | 3181 | 3204 | 3227 | 3250 | 3296 |
| Quasar 60 Tech | 2036 | 2050 | 2064 | 2078 | 2092 |
| Quasar 60 Double Tech | 3998 | 4026 | 4054 | 4082 | 4110 |
| Quasar 60 M EMPK | 1619 | 1631 | 1643 | 1655 | 1667 |
| Quasar 60 Tech EMPK | 2036 | 2050 | 2064 | 2078 | 2092 |

19W/38W Max Wattage

Revision 11
04/25

Order Guide - Quasar 60



Order code example

Q60-B-AM-38-T3/T3-3K-120-NA

| Series | Light Emission | Wattage | Finish | Optics | Kelvin | Voltage | Controls | Accessories |
|-------------------------|-----------------------|--|--|---|---|------------------------|--|---|
| Q60 Quasar 60 | M (One-Way) | 19 19 watt (M Max) | AM Aluminum Metallic | Choose One for M & Two for B T2 Type II T3 Type III (Tech) | 27K 2700K | UNV 120-277V | NA Non Dimming | EMPK Integral Emergency Battery Back-Up (M Only) REM Remote Emergency Battery Back-Up CWREM Cold Weather Remote Emergency Battery Back-Up -20°C to 55°C -4°F to 131°F PHC Photocell (M Only) OCC Occupancy Sensor (M Only) BABAA Build America Buy America Act compliant |
| | B (Two-Way) | 38 38 watt (B Max) XX Specify Wattage Must be below max | IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color | | 3K 3000K 35K 3500K 4K 4000K | | 0-10V 0-10V Dimming Driver ELV 120V Line- Voltage Dimming Driver For more Options Contact Factory | |

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 11
04/25