

QUASAR 60




Wall sconce series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (TECH versions).
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Single (M) or dual (B) light emission.
- IESNA Type II light distribution.
- Single (TECH) or dual (DOUBLE TECH) light emission.
- IESNA Type III light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

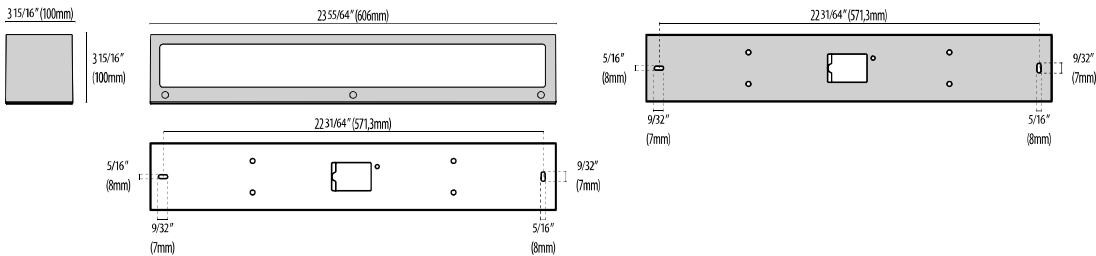

QUASAR
60

Lumen Output	27K	3K	35K	4K	5K
Quasar 60 M	1619	1631	1643	1655	1667
Quasar 60 B	3181	3204	3227	3250	3296
Quasar 60 Tech	2036	2050	2064	2078	2092
Quasar 60 Double Tech	3998	4026	4054	4082	4110
Quasar 60 M EMPK	1619	1631	1643	1655	1667
Quasar 60 Tech EMPK	2036	2050	2064	2078	2092

Order Guide - Quasar 60



Order code example

Q60-B-AM-38-T3/T3-3K-120-NA

Q60-

Output	Wattage	Finish	Optics	Kelvin	Voltage	Controls	Options
M (One-Way)	19 19 watt (M Max)	AM Aluminum Metallic	Choose One for M & Two for B T2 Type II	27K 2700K	120 120 volts	NA Non Dimming	EMPK Integral Emergency Battery Back Up (M & TECH Only)
B (Two-Way)	38 38 watt (B Max)	IG Iron Gray	T3 Type III (TECH)	3K 3000K	277 277 volts	0-10V 0-10V Dimming	REM Remote Emergency Battery Back up
	XX Specify Wattage Must be below max	IR Iron Rust		35K 3500K		ELV ELV Dimming	
		BK Textured Black		4K 4000K			
		WH Textured White					
		CC Custom Color					