

QUASAR 60



Wall sconce series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (TECH versions).
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Single (M) or dual (B) light emission.
- DarkSky approved when ordered with single light emission only, and in 3000K or below.

- IESNA Type II light distribution.
- Single (TECH) or dual (DOUBLE TECH) light emission.
- IESNA Type III light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

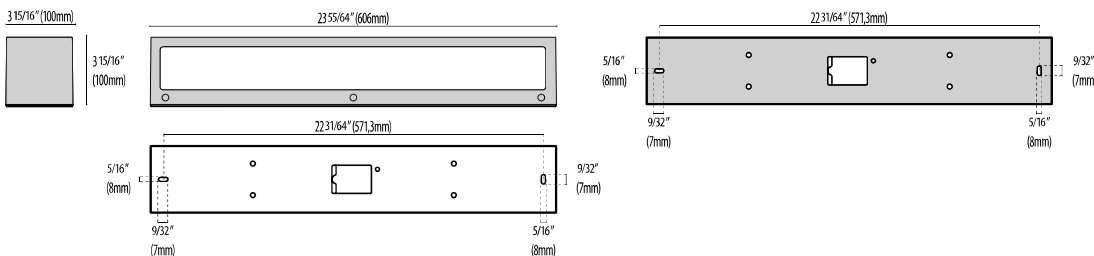

QUASAR
60



Scan here
for installation
instructions

Lumen Output	27K	3K	35K	4K	5K
Quasar 60 M	1619	1631	1643	1655	1667
Quasar 60 B	3181	3204	3227	3250	3296
Quasar 60 Tech	2036	2050	2064	2078	2092
Quasar 60 Double Tech	3998	4026	4054	4082	4110
Quasar 60 M EMPK	1619	1631	1643	1655	1667
Quasar 60 Tech EMPK	2036	2050	2064	2078	2092

19W/38W Max Wattage

Revision 13
11/25

Order Guide - Quasar 60



Order code example **Q60-B-AM-38-T3/T3-3K-120-NA**

Series	Light Emission	Wattage	Finish	Optics	Kelvin	Voltage	Controls	Accessories
Q60 Quasar 60	M (One-Way) B (Two-Way)	19 19 watt (M Max) 38 38 watt (B Max) XX Specify Wattage Must be below max	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	Choose One for M & Two for B T2 Type II	27K 2700K	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver ELV 120V Line- Voltage Dimming Driver For more Options Contact Factory	EMPK Integral Emergency Battery Back-Up (M Only) REM Remote Emergency Battery Back-Up CWREM Cold Weather Remote Emergency Battery Back-Up -20°C to 55°C -4°F to 131°F PHC Photocell (M Only) OCC Occupancy Sensor (M Only) BABAA Build America Buy America Act compliant (not available for all options)
				35K 3500K				
				3K 3000K				
				4K 4000K				
				(Empty cell)				

80 CRI STANDARD - OTHER OPTIONS AVAILABLE



OCC HI/LO Sensor