



WALL MOUNTED
MASK+ series

MASK+ series

MASK+



Product Family


Optics



MASK+
L 12.8" x H 2.5" x D 6.8"




MASK+
M

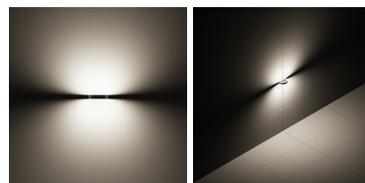


MASK+
B

MASK+ M



Wall sconce series. Fixtures consists of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Frosted, flat, tempered silk screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Single (M) or dual (B) light emission.
- IESNA Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included for RACO 8660 (or similar), for RACO 8125 (or similar) accessory to be order separately.
- Consult factory for dimming options, custom finishes and non-catalogued CCT (Kelvin) options.
- Product meets Buy American requirements within ARRA.
- 5-year warranty.

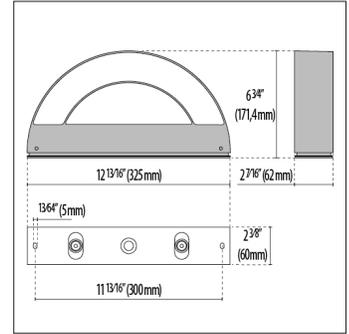

- AN-96 / IRON GRAY / TEXTURED
 - WH-87 / WHITE / TEXTURED
- Consult Factory:
- RB-10 / IRON RUST (BRONZE) / TEXTURED
 - GR-94 / ALUMINUM METALLIC / TEXTURED
 - BK-81 / TEXTURED BLACK / TEXTURED



LAMPHOLDER	POWER	VOLTAGE	CRI	KELVIN	OPTIC TYPE	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
MID POWER LEDS 120-277 V DIMMABLE 0-10V													
LED	12.5 W	120-277V	80	3000	TYPE V	-	1552 lm	914 lm	70	10	50000 h	●	072031
LED	12.5 W	120-277V	80	4000	TYPE V	-	1668 lm	971 lm	70	10	50000 h	●	072032
LED	12.5 W	120-277V	80	3000	TYPE V	-	1552 lm	914 lm	70	10	50000 h	○	072033
LED	12.5 W	120-277V	80	4000	TYPE V	-	1668 lm	971 lm	70	10	50000 h	○	072034

MASK+ B



Wall sconce series. Fixtures consists of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Frosted, flat, tempered silk screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Single (M) or dual (B) light emission.
- IESNA Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included for RACO 8660 (or similar), for RACO 8125 (or similar) accessory to be order separately.
- Consult factory for dimming options, custom finishes and non-catalogued CCT (Kelvin) options.
- Product meets Buy American requirements within ARRA.
- 5-year warranty.

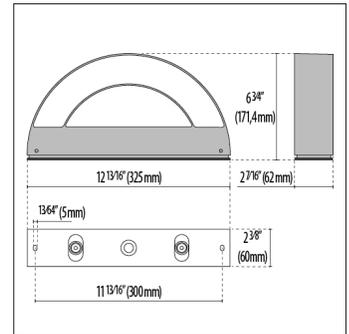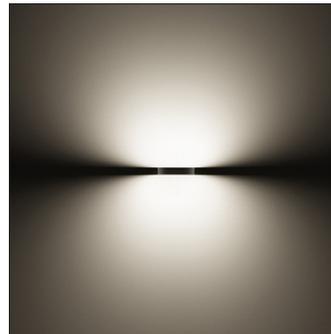

- AN-96 / IRON GRAY / TEXTURED
 - WH-87 / WHITE / TEXTURED
- Consult Factory:
- RB-10 / IRON RUST (BRONZE) / TEXTURED
 - GR-94 / ALUMINUM METALLIC / TEXTURED
 - BK-81 / TEXTURED BLACK / TEXTURED


LAMPHOLDER	POWER	VOLTAGE	CRI	KELVIN	OPTIC TYPE	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
MID POWER LEDS 120-277 V DIMMABLE 0-10V													
LED	24 W	120-277V	80	3000	TYPE V	-	3104 lm	1770 lm	70	10	50000 h	●	072035
LED	24 W	120-277V	80	4000	TYPE V	-	3336 lm	1879 lm	70	10	50000 h	●	072036
LED	24 W	120-277V	80	3000	TYPE V	-	3104 lm	1770 lm	70	10	50000 h	○	072037
LED	24 W	120-277V	80	4000	TYPE V	-	3336 lm	1879 lm	70	10	50000 h	○	072038

MASK+



OPTIONAL ACCESSORIES

DESCRIPTION	FINISH	CODE
MASK+		
4-inch Tall Accessory Plate	●	3101273
4-inch Tall Accessory Plate	○	3101309

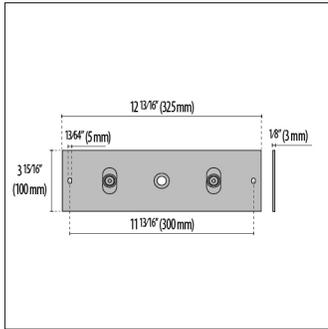

3101273
3101309

