

# GUELL 4



Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Copper-free precision die-cast aluminum housing, and adjustable steel mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- NEMA 7H x 7V light distribution (S/W).
- NEMA 7H x 5V light distribution (Type II).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.

- Pre-wired factory sealed cable for external electrical connection included.
- Standard quick release latch(es) allow for tool-free access.
- Louver, frosted glass, protective grid and matching junction box plate accessories available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



## FINISHES

- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- WH-87 / White / Textured

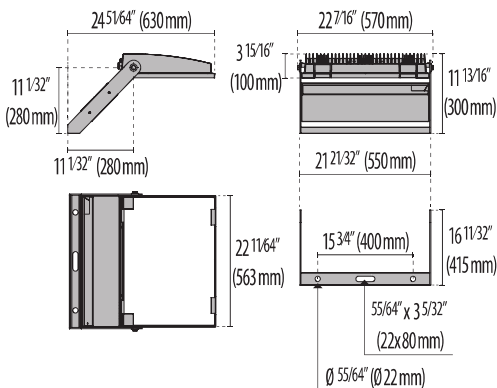

GUELL  
4

Lumen Output	3K	4K
Guell 4 S/W 420W	52976	53096
Guell 4 T2 420W	48772	48892

# Order Guide - Guell Four



Order code example

GU4

GU4

Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
<b>420</b> 420 watt (max)  <b>XX</b> Specify Wattage Must be below max	<b>S/W</b> nema 7Hx7V  <b>A40/W</b> nema 7Hx5V	<b>AM</b> Aluminum Metallic  <b>IG</b> Iron Gray  <b>IR</b> Iron Rust  <b>BK</b> Textured Black  <b>WH</b> Textured White  <b>CC</b> Custom Color	<b>3K</b> 3000K  <b>35K</b> 3500K  <b>4K</b> 4000K  <b>5K</b> 5000K	<b>120</b> 120 volts  <b>277</b> 277 volts	<b>NA</b> Non Dimming  <b>0-10V</b> 0-10V Dimming  <b>ELV</b> ELV Dimming	<b>FRST</b> Frosted Glass  <b>LVR</b> Louver Asymmetric  <b>GRID</b> Protective Glass Grid Cover

## OPTIONAL ACCESSORIES

DESCRIPTION

**GUELL 4 A/W - S/W**

Vetro soft GUELL 4

**GUELL 4 A/W**

Louvre A40/W

**GUELL 4**

Protective grid

