

GUELL 4



Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Copper-free precision die-cast aluminum housing, and adjustable steel mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- NEMA 7H x 7V light distribution (S/W).
- NEMA 7H x 5V light distribution (Type II).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.

- Pre-wired factory sealed cable for external electrical connection included.
- Standard quick release latch(es) allow for tool-free access.
- Louver, frosted glass, protective grid and matching junction box plate accessories available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- WH-87 / White / Textured

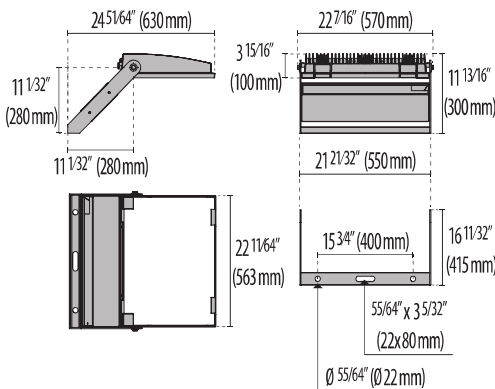

GUELL
4

Scan here
for installation
instructions



Lumen Output	3K	4K
Guell 4 S/W 420W	52976	53096
Guell 4 T2 420W	48772	48892

Order Guide - Guell Four



Order code example

GU4-S/W-IG-4K-UNV-0-10V-FRST

GU4

Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
420 420 watt (max)	S/W nema 7Hx7V A40/W nema 7Hx5V	AM Aluminum Metallic	3K 3000K	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming	FRST Frosted Glass LVR Louver Asymmetric GRID Protective Glass Grid Cover
		IG Iron Gray	35K 3500K	347V 347V		
		IR Iron Rust	4K 4000K	408V 408V		
		BK Textured Black	5K 5000K			
		WH Textured White				
		CC Custom Color				

80 CRI STANDARD - OTHER OPTIONS AVAILABLE