


MIMIK 50

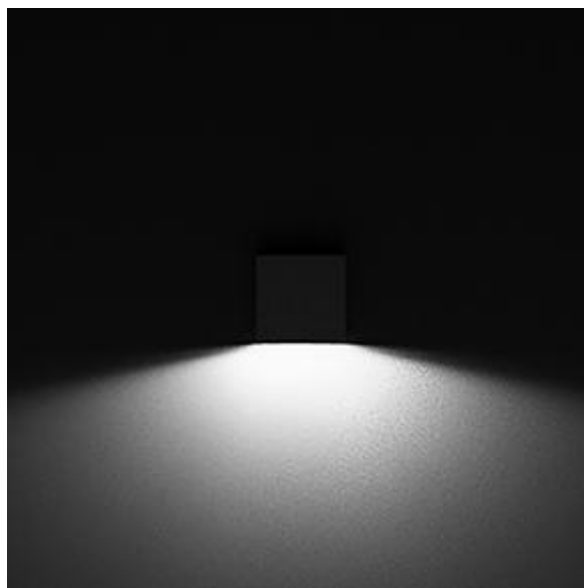

Wall mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- Single (M) or dual (B) light emission.
- IESNA Type II light distribution.
- IESNA Type III light distribution.
- IESNA Type IV light distribution.
- Standard dual-circuit wiring and dimming for dual (B) light emission models.
- DarkSky approved when ordered with single light emission only, and in 3000K or below.

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- BUTTON and SWIVEL 120-277 V (50 / 60 Hz) photoelectric switch options available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- GR-94 / Aluminum metallic / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- WH-87 / White / Textured

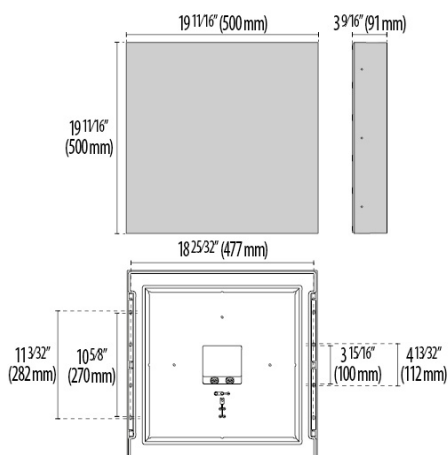

MIMIK
50

Lumen Output	2700K	3000K	3500K	4000K
MIMIK 50 M T2 (39W)	4357	4517	4677	4837
MIMIK 50 M T2 (53W)	5698	5908	6118	6328
MIMIK 50 M T3 (39W)	4265	4422	4579	4736
MIMIK 50 M T3 (53W)	5578	5784	5990	6196
MIMIK 50 M T4 (39W)	4069	4219	4369	4519
MIMIK 50 M T4 (53W)	4874	5220	5566	5912
MIMIK 50 B T2 (78W)	8659	8977	9295	9614
MIMIK 50 B T2 (106W)	11324	11741	12158	12575
MIMIK 50 B T3 (78W)	8474	8787	9100	9413
MIMIK 50 B T3 (106W)	11085	11494	11903	12313
MIMIK 50 B T4 (78W)	8091	8388	8685	8982
MIMIK 50 B T4 (106W)	10581	10970	11359	11749

WATTAGE	
MIMIK 50 M	39W
MIMIK 50 M	53W
MIMIK 50 B	78W
MIMIK 50 B	106W



Scan here
for installation
instructions

Revision 10
04/25

Order Guide - Mimik 50



Order code example

M50-M-39-T4-AM-27K-120V-NA-PHC-B

M50-

Light Emission	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
M (One-Way) B (Two-Way)	22 22 watt (M)	T2 Type II	AM Aluminum Metallic	27K 2700k	UNV 120-277V 347V 347V remote transformer	NA Non Dimming	EMPK Integral Emergency Battery back-up
	39 39 watt (M)	T3 Type III	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming Driver	PHC-B Photocell Button
	53 53 watt (M max)	T4 Type IV	IR Iron Rust	35K 3500k		ELV 120V Line- Voltage Dimming Driver	REM Remote Emergency Battery Back-up
	42 42 watt (B)	NB Narrow Beam 30°	BK Textured Black	4K 4000k			BABAA Build America Buy America Act compliant
	78 78 watt (B)		WH Textured White	5K 5000K			
	106 106 watt (B max)		CC Custom Color	AMB Amber			
	XX Specify wattage must be below max			BLU Blue			
				GRN Green			
				RED Red			

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 10
04/25