

QUASAR 30 CEILING



Ceiling mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.

- 90° x 95° beam angle (TECH)
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- DarkSky approved in 3000K or below.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

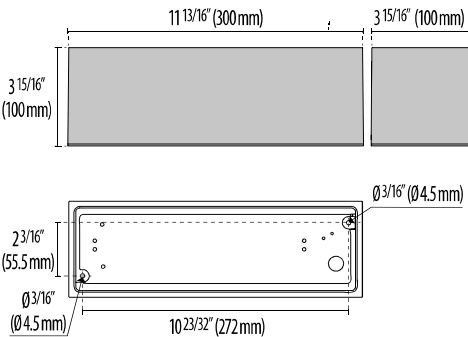

Scan here
for installation
instructions



QUASAR 30 CEILING

Lumen Output	27K	3K	35K	4K	5K
Quasar 30 Ceiling	1689	1756	1822	1889	1955

21W Max Wattage

Order Guide - Quasar 30 Ceiling



Order code example

Q30C-21-AM-27K-UNV-NA-CON2

Series	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
Q30C Quasar 30 Ceiling	21W 21 watt (max) XX Specify Wattage Must be below max	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K BLU Static Blue GRN Static Green RED Static Red AMBER Static Amber RGBW RGBW Consult factory for control details	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver ELV 120V Line- Voltage Dimming Driver	REM Remote Mounted Emergency Battery Back-Up CON2 (single-gang j-box, adaptor plate and 1/2" knockouts) CON4 (single-gang j-box, adaptor plate and 3/4" knockouts) BABAA Build America Buy America Act compliant

80 CRI STANDARD - OTHER OPTIONS AVAILABLE