

NIKKO+27 LA



Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.

- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Wall bracket and post accessories available (ordered separately).
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured

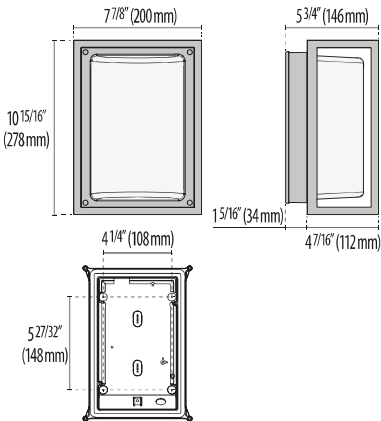

NIKKO+
27 LA

Lumen Output	27K	3K	35K	4K	5K
Nikko+27 LA	1169	1203	1237	1271	1305

22W Max Wattage

Scan here
for installation
instructions



Order Guide - Nikko+27 LA




Order code example


N27L-LED-22-AM-4K-120-NA

80 CRI STANDARD - OTHER OPTIONS AVAILABLE


N27L-

Light Source	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
LED 22W LED INC 60W INC Edison Lamp (Lamp by others)	LED ONLY 22 22 watt (max) XX Specify Wattage Must be below max	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	LED ONLY 27K 2700k 3K 3000k 35K 3500k 4K 4000k 5K 5000k 65K 6500k RED Static Red BLU Static Blue GRN Static Green RGBW* RGBW *See below for details	UNV 120-277V	LED ONLY NA Non Dimming 0-10V 0-10V Dimming Driver ELV 120V Line-Voltage Dimming Driver	REM Remote Mounted Emergency Battery Back Up CLEAR Clear Glass INC Version Only WB Wall Bracket Not Required for standard wall mounting P10 10.43" Post P32 32.79" Post P48 48.54" Post BABAA Build America Buy America Act compliant  <p>COMPLETE UNIT 1A+1B = 2 codes 2A+1B = 3 codes</p> <p>COMPONENTS A luminaire B post</p>


WALL BRACKET AND POSTS ARE SUITABLE FOR ONE OR TWO FIXTURES EACH




WB
Wall Bracket



P10
10.4" Post



P32
32.79" Post



P48
48.54" Post



← CLEAR GLASS
60W INC VERSION

RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)