

# NIKKO+27 LA



Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.

- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Wall bracket and post accessories available (ordered separately).
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



## FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured

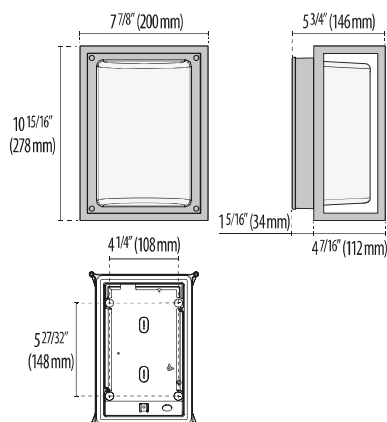

NIKKO+  
27 LA

Lumen Output	27K	3K	35K	4K	5K
Nikko+27 LA	1169	1203	1237	1271	1305

22W Max Wattage

Scan here  
for installation  
instructions



# Order Guide - Nikko+27 LA



Order code example


N27L-LED-22-AM-4K-120-NA

80 CRI STANDARD - OTHER OPTIONS AVAILABLE


N27L-

Light Source	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
<b>LED</b> 22W LED  <b>INC</b> 60W INC Edison Lamp (Lamp by others)	LED ONLY  <b>22</b> 22 watt (max)  <b>XX</b> Specify Wattage Must be below max	<b>AM</b> Aluminum Metallic  <b>IG</b> Iron Gray  <b>IR</b> Iron Rust  <b>BK</b> Textured Black  <b>WH</b> Textured White  <b>CC</b> Custom Color	LED ONLY  <b>27K</b> 2700k  <b>3K</b> 3000k  <b>35K</b> 3500k  <b>4K</b> 4000k  <b>5K</b> 5000k  <b>65K</b> 6500k  <b>RED</b> Static Red  <b>BLU</b> Static Blue  <b>GRN</b> Static Green  <b>RGBW*</b> RGBW  *See below for details	<b>UNV</b> 120-277V	LED ONLY  <b>NA</b> Non Dimming  <b>0-10V</b> 0-10V Dimming Driver  <b>ELV</b> 120V Line-Voltage Dimming Driver	<b>REM</b> Remote Mounted Emergency Battery Back Up  <b>CLEAR</b> Clear Glass INC Version Only  <b>WB</b> Wall Bracket Not Required for standard wall mounting  <b>P10</b> 10.43" Post  <b>P32</b> 32.79" Post  <b>P48</b> 48.54" Post  <b>BABAA</b> Build America Buy America Act compliant (not available for all options)  <p><b>COMPLETE UNIT</b> 1A+1B = 2 codes 2A+1B = 3 codes</p> <p><b>COMPONENTS</b> A luminaire B post</p>


WALL BRACKET AND POSTS ARE SUITABLE FOR ONE OR TWO FIXTURES EACH




WB  
Wall Bracket



P10  
10.4" Post



P32  
32.79" Post



P48  
48.54" Post



← CLEAR GLASS  
60W INC VERSION

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting  
www.performanceinlighting.com

Revision 10  
06/25

## Power Supply



**17433**  
Kit driver 48V



**17096**  
Kit driver 48V WP

## RF Controls



**3104173**  
RGBW RF controller 4 channel  
(0.35A each CH)



**31041730**  
RGBW RF controller WP 4 channel  
(0.35A each CH)



**310429**  
RGBW hand held remote

## DMX Controls



**178973**  
RGBW DMX enabler/decoder 4  
channel (0.35A each CH)



**1789730**  
RGBW DMX enabler/decoder WP 4  
channel (0.35A each CH)