

NIKKO+27 LA



Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- High transmittance, internally coated, soda-lime pressed glass diffuser, thermally and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.

- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Wall bracket and post accessories available (ordered separately).
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- RB-10 / Iron rust / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured

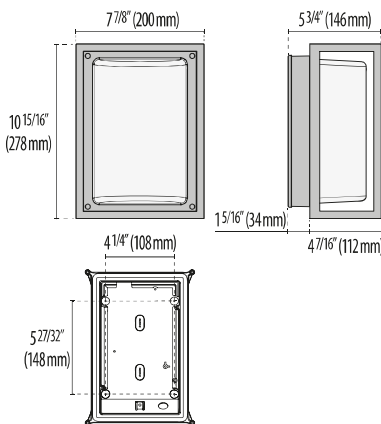

NIKKO+
27 LA

Lumen Output	27K	3K	35K	4K	5K
Nikko+27 LA	1169	1203	1237	1271	1305

Order Guide - Nikko+27 LA



Order code example

N27L-LED-22-AM-4K-120-NA

N27L-

Light Source	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
LED 22W LED INC 100W INC Edison Lamp (Lamp by others)	LED ONLY 22 22 watt (max) XX Specify Wattage Must be below max	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	LED ONLY 27K 2700k 3K 3000k 35K 3500k 4K 4000k 5K 5000k 65K 6500k RED Static Red BLU Static Blue GRN Static Green	120 120 volts 277 277 volts	LED ONLY NA Non Dimming 0-10V 0-10V Dimming ELV ELV Dimming	LED ONLY REM Remote Mounted Emergency Battery Back Up WB Wall Bracket P10 10.43" Post P32 32.79" Post P48 48.54" Post

