




- Area and site lighting series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and top cap.
 - Custom molded, anti-aging gasket(s).
 - Micro-prismatic patterned, tempered, silk-screened, flat glass diffuser.
 - Stainless steel external hardware.
 - Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
 - IESNA Type V light distribution.
 - Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
 - Integral surge protector can withstand up to 10 kV transient line surge.
 - Pre-wired factory sealed cable for external electrical connection included.
 - Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
 - Consult factory for custom pre-wired factory sealed cable length options.
 - Consult factory for pole information.
 - Consult factory for wall bracket accessory, multi-head pole top mounting, and other custom options.
 - Product meets Buy American Act requirements within ARRA.
 - 5-year warranty.
 - Marine Grade finish.
 - Suitable for Natatorium applications.
 - DarkSky approved in 3000K or below.



FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

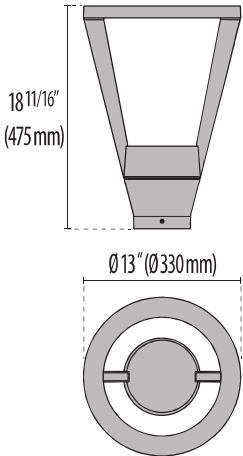

Lumen Output	3K	4K
Hedo+ 7W	624	644
Hedo+ 23W	2080	2145
Hedo+ 35W	3171	3269



Scan here
for installation
instructions

Order Guide - Hedo



Order code example

Hedo-35-T5-AM-3K-120-NA

HEDO-

Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
7 7 watt (min) 23 23 watt 35 35 watt (max) XX Specify Wattage Must be below max	T5 Type 5	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	3K 3000K 4K 4000K	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver ELV 120V Line-Voltage Dimming Driver For more Options Contact Factory	4"Adaptor 4 Inch pole adaptor GFCI Pole mounted GFCI BOL Bollard 54" BABAA Build America Buy America Act compliant Poles available as an accessory (ordered separately) see below for details

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pilighting.com
www.performanceinlighting.com

Revision 11
04/25


OPTIONAL ACCESSORIES (ordered separately)

POLES FOR HEDO+


When ordering, please specify quantity of fixtures per pole as well as installation location (city & state)

Order code example: 714 16 30 4

Material	Height (ft)	Pole Diameter (in)	Custom Options (blank is standard)	Finish (additional characters may follow for factory information)
714 Aluminum*	08 8' tall	30 Ø3.0"	DBx Direct Burial** (x = depth below grade, measured in feet)	1 Aluminum Metallic
715 Steel*	10 10' tall	40 Ø4.0" (adaptor required*)		2 Black
716 Wood*	12 12' tall		GFCI integrated GFCI outlet**	3 Iron Gray
	14 14' tall		BA Banner Arms** (contact factory for details)	4 Iron Rust
	20 20' tall			5 White
	40 40' tall		BH Bullhorn arms for double fixture	6 Custom Color (specify RAL#)
*Based on EPA and wind loads, pole may need to be tapered or require a tenon.		Custom heights available, contact factor for details. Some restrictions apply for wood poles.		W1 Wood - Caramel - smooth
				W12 Wood - Vanilla - brushed
				For more, see below.

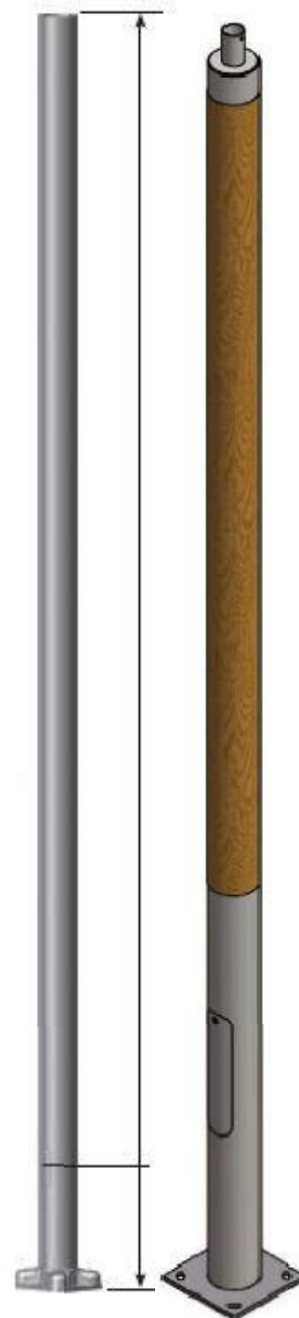

*For Ø4" poles, an adaptor is required: 3111179

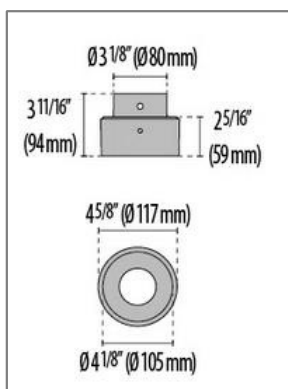


Base cover shape and bolt circle diameter (BCD) will vary based on pole size and vendor. Contact factory for details related to your project.


WOOD GRAIN FINISH OPTIONS:

W1	CARAMEL	W11	SLATE	W16
W2	VANILLA	W12	CINNAMON	W17
W3	COCOA	W13	TOPAZ	W18
W4	SAFFRON	W14	ONYX	W19
W5	NUTMEG	W15		

54" OAH



TEMPLATE/FIXING PLATE



9395