


CRICKET+15

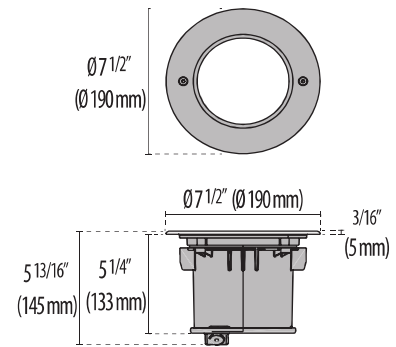

CRICKET+
15

In-ground series. Fixtures consist of:

- Copper-free die-cast corrosion-resistant aluminum housing and trim.
- Copper-free die-cast corrosion-resistant aluminum housing.
- AISI 316 stainless steel trim.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Frosted, tempered, silk-screened, flat glass diffuser (C/EW versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transmittance transparent optics.
- Circular Intensive beam angle (C/I).
- Circular Medium beam angle (C/M).
- Diffuse light emission (C/EW).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Pre-wired factory sealed cable for external electrical connection included.

- Each rough-in kit is provided with a protective faceplate to avoid possible deformations during the installation in concrete to simplify installation.
- Thermoplastic compression-molded rough-in kit can be ordered separately.
- For outdoor in-ground applications, provide drainage gravel at least 12" below the rough-in or a suitable drainage system.
- Frosted (FRST) and Non-Slip (NS) glass option available - add suffix to any part number.
- Consult factory for additional optic options.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- INOX / Stainless steel / Matt
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

Lumen Output		27K	3K	35K	4K	6K
Cricket+15 C/I 14W		966	1000	1034	1069	1103
Cricket+15 C/M 14W		1086	1125	1164	1203	1242
Cricket+15 A/M 14W		647	671	694	717	740



Scan here
for installation
instructions

FIXTURES INCLUDE 120-277V 50/60HZ INTEGRAL DRIVERS UNLESS OTHERWISE NOTED

Revision 07
04/25

Order Guide - Cricket+



Order code example


C+-15-6-C/I-AM-3K-NA-FRST

C+							
Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Options
15 Cricket+15	14 14 watt Cricket +15 Max XX Specify wattage must be below max	C/I 8° C/M 30° A/M Asymmetric Wall Washer 30°	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White SS Stainless Steel CC Custom Color	27K 2700K 3K 3000k 35K 3500K 4K 4000k AMB** Static Amber (turtle- friendly) RED** Static Red **Consult factory for MOQ	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver ELV 120V Line-Voltage Dimming Driver For more Options Contact Factory	FRST Frosted Glass NS Non-Slip Glass LVR Hex Louver TP Tamper Proof hardware BABAA Build America Buy America Act compliant

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

INCLUDED ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
CRICKET+ 15		
Recessed fixing kit		3111136



3111136

