


# CRICKET+20

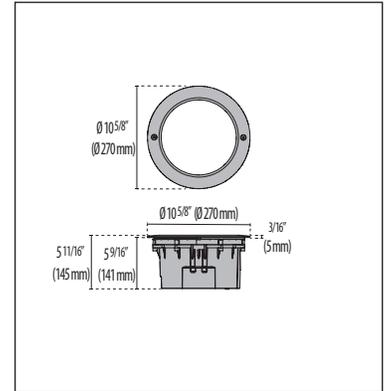

In-ground series. Fixtures consist of:

- Copper-free die-cast corrosion-resistant aluminum housing and trim.
- AISI 316 stainless steel trim.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transmittance transparent optics.
- Circular Intensive beam angle (C/I).
- Circular Medium beam angle (C/M).
- **Asymmetric Medium Optics (A/M)**
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Each rough-in kit is provided with a protective faceplate to avoid possible deformations during the installation in concrete to simplify installation.

- Thermoplastic compression-molded rough-in kit can be ordered separately.
- For outdoor in-ground applications, provide drainage gravel at least 12" below the rough-in or a suitable drainage system.
- Frosted (FRST) and Non-Slip (NS) glass option available - add suffix to any part number.
- Consult factory for additional optic options.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- 5-year warranty.
- **Marine Grade finish.**
- **Suitable for Natatorium applications.**
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



## FINISHES

- AN-96 / Iron gray / Textured
- INOX / Stainless steel / Matt
- BK-81 / Black / Textured
- GR-94 / Aluminium metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

LUMEN OUTPUT		27K	3K	35K	4K	5K	6K
CRICKET +20 C/I	15W	1213	1213	1296	1296	1296	1296
	26W	2177	2177	2326	2326	2326	2326
	37W	3048	3048	3256	3256	3256	3256
CRICKET +20 C/M	15W	1322	1322	1413	1413	1413	1413
	26W	2373	2373	2536	2536	2536	2536
	37W	3322	3322	3550	3550	3550	3550
CRICKET +20 A/M	15W	999	999	1067	1067	1067	1067
	26W	1793	1793	1916	1916	1916	1916
	37W	2510	2510	2682	2682	2682	2682



Scan here  
for installation  
instructions

FIXTURES INCLUDES A 120/277V 50/60HZ INTEGRAL DRIVER UNLESS OTHERWISE NOTED

# Order Guide - CRICKET+20



Order code example


**C+20-26W-4K-C/M-SS-UNV-010V-FRST**

FIXTURE	WATTAGE	CCT / LED	OPTICS	FINISH	VOLTAGE	CONTROLS	OPTIONS
<b>C+20</b> Cricket+20	<b>26W</b> 26 Watt	<b>27K</b> 2700K	<b>C/I</b> 8°	<b>AM</b> Aluminum Metallic	<b>UNV</b> 120-277V	<b>NA</b> Non Dimming	<b>FRST</b> Frosted Glass (26W max)
	<b>37W</b> 37 Watt (max) 25°C max ambient temperature	<b>3K</b> 3000K <b>35K</b> 3500K <b>4K</b> 4000K <b>AMB**</b> Static Amber (590nm) <b>RED**</b> Static Red <b>RGBW4*</b> 16.5W C/M Only 4K-White <b>RGBW27*</b> 16.5W C/M Only 27K-White	<b>C/M</b> 30° <b>A/M</b> Asymmetric Wall Washer 30°	<b>BK</b> Textured Black <b>IG</b> Iron Gray <b>IR</b> Iron Rust <b>WH</b> Textured White <b>SS</b> Stainless Steel <b>CC</b> Custom Color	<b>*not suitable for RGBW</b>	<b>010V</b> 0-10V Dimming Driver  <b>ELV</b> 120V Line-Voltage Dimming Driver  <b>For more Options Contact Factory</b>	<b>NS</b> Non-Slip Glass <b>LVR</b> Hex Louver <b>TP</b> Tamper Proof hardware <b>BABAA</b> Build America Buy America Act compliant (not available for all options)
	<b>XX</b> Specify wattage must be below max	<b>*Consult factory for control details</b>  <b>**Consult factory for MOQ</b>					

## INCLUDED ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
CRICKET+ 20		
Recessed fixing kit		<b>3111135</b>


80 CRI STANDARD - OTHER OPTIONS AVAILABLE

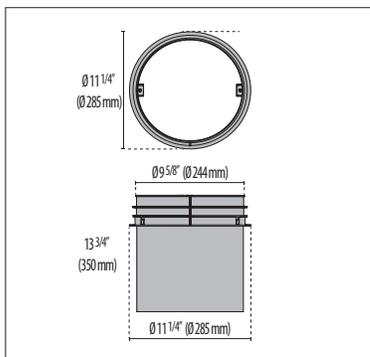

3111135

## OPTIONAL RGBW ACCESSORIES


DESCRIPTION	FINISH	PART NUMBER
<b>Controls</b>		
Kit driver 48V		<b>17433</b>
Kit driver 48V Wet Location		<b>17096</b>



Product is supplied with integral DMX controllers, and remote 48VDC power supply. Controls by others.

## TECHNICAL DATA

CRICKET+20

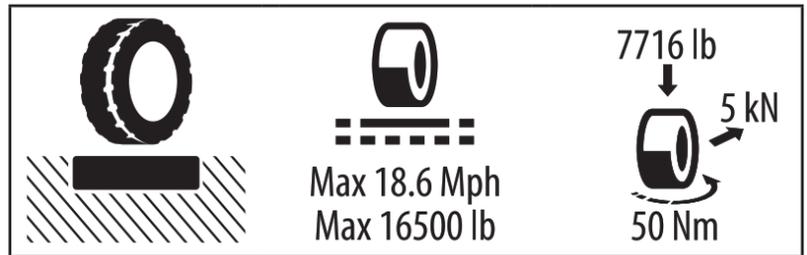

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting  
www.performanceinlighting.com

Revised  
03/26