


CRICKET+20

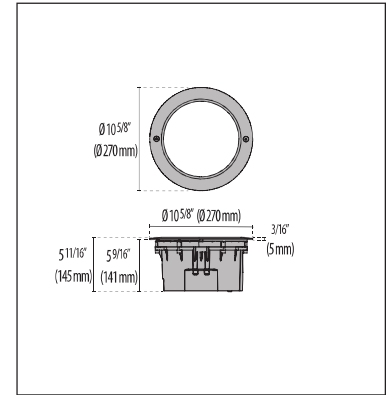

In-ground series. Fixtures consist of:

- Copper-free die-cast corrosion-resistant aluminum housing and trim.
- Copper-free die-cast corrosion-resistant aluminum housing.
- AISI 316 stainless steel trim.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Frosted, tempered, silk-screened, flat glass diffuser (C/EW versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transmittance transparent optics.
- Circular Intensive beam angle (C/I).
- Circular Medium beam angle (C/M).
- Diffuse light emission (C/EW).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Pre-wired factory sealed cable for external electrical connection included.

- Each rough-in kit is provided with a protective faceplate to avoid possible deformations during the installation in concrete to simplify installation.
- Thermoplastic compression-molded rough-in kit can be ordered separately.
- For outdoor inground applications, provide drainage gravel at least 12" below the rough-in or a suitable drainage system.
- Frosted (FRST) and Non-Slip (NS) glass option available - add suffix to any part number.
- Consult factory for additional optic options.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- INOX / Stainless steel / Matt
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

LUMEN OUTPUT		27K	3K	35K	4K	5K	6K
CRICKET +20 C/I	15W	1213	1213	1296	1296	1296	1296
	26W	2177	2177	2326	2326	2326	2326
	37W	3048	3048	3256	3256	3256	3256
CRICKET +20 C/M	15W	1322	1322	1413	1413	1413	1413
	26W	2373	2373	2536	2536	2536	2536
	37W	3322	3322	3550	3550	3550	3550
CRICKET +20 A/M	15W	999	999	1067	1067	1067	1067
	26W	1793	1793	1916	1916	1916	1916
	37W	2510	2510	2682	2682	2682	2682



Scan here
for installation
instructions

FIXTURES INCLUDE 120-277V 50/60HZ INTEGRAL DRIVERS UNLESS OTHERWISE NOTED

Order Guide - Cricket+



Order code example

C+-20-26-C/I-AM-3K-NA-FRST


C+

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Options
20 Cricket+20	26 26 watt	C/I 8°	AM Aluminum Metallic	27K 2700K	UNV 120-277V not suitable for RGBW	NA Non Dimming	FRST Frosted Glass
	37 37 watt	C/M 30°	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming Driver	NS Non-Slip Glass
	Max Wattage 25°C Max Ambient Temp	A/M Asymmetric Wall Washer 30°	IR Iron Rust	35K 3500K		ELV 120V Line-Voltage Dimming Driver	LVR Hex Louver
	XX Specify wattage must be below max		BK Textured Black	4K 4000k			TP Tamper Proof hardware
			WH Textured White	AMB** Static Amber			BABAA Build America Buy America Act compliant
			SS Stainless Steel	RED** Static Red			
			CC Custom Color	RGBW* (16.5W) (4K White)			
				*Consult factory for control details		For more Options Contact Factory	
				**Consult factory for MOQ			

INCLUDED ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
CRICKET+ 20		
Recessed fixing kit		3111135

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

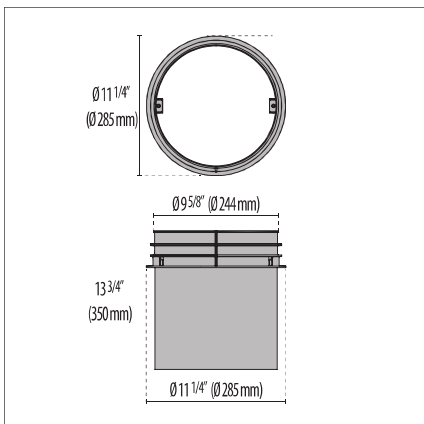

3111135

OPTIONAL RGBW ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
Controls		
Kit driver 48V		17433
Kit driver 48V Wet Location		17096



Product is supplied with integral DMX controllers, and remote 48VDC power supply. Controls by others.

TECHNICAL DATA

CRICKET+20

