CRICKET+ 20

Performance Lighting




In-ground series. Fixtures consist of:

- Copper-free die-cast corrosion-resistant aluminum housing and trim.
- AISI 316 stainless steel trim.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transmittance transparent optics.
- Circular Intensive beam angle (C/I).
- Circular Medium beam angle (C/M).
- Asymmetric Medium Optics (A/M)
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Pre-wired factory sealed cable for external electrical connection included.
- Each rough-in kit is provided with a protective faceplate to avoid possible deformations during the installation in concrete to simplify installation.
- Thermoplastic compression-molded rough-in kit can be ordered separately.
- For outdoor inground applications, provide drainage gravel at least 12" below the rough-in or a suitable drainage system.
- Frosted (FRST) and Non-Slip (NS) glass option available - add suffix to any part number.
- Consult factory for additional optic options.
- Consult factory for dimming options, marine-grade custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.

IP 67 · QUICK · WET · cULus LISTED · RAL · IK 10 21 J

FINISHES

- **AN-96** / Iron gray / Textured
- **INOX** / Stainless steel / Matt
- **BK-81** / Black / Textured
- **GR-94** / Aluminum metallic / Textured
- **WH-87** / White / Textured
- **RB-10** / Iron rust / Textured



CRICKET +20

LUMEN OUTPUT	Wattage	27K	3K	35K	4K	6K
CRICKET+ 20 C/I	15W	1213	1213	1296	1296	1296
	26W	2177	2177	2326	2326	2326
	37W	3048	3048	3256	3256	3256
CRICKET+ 20 C/M	15W	1322	1322	1413	1413	1413
	26W	2373	2373	2536	2536	2536
	37W	3322	3322	3550	3550	3550
CRICKET+ 20 A/M	15W	999	999	1067	1067	1067
	26W	1793	1793	1916	1916	1916
	37W	2510	2510	2682	2682	2682
Fixture includes a 120-277V 50-60 Hz integral driver unless otherwise noted						

Scan here for installation Instructions

Performance in Lighting reserves the rights to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Rev. 08/26/2026

Order Guide - Cricket+ 20


Order code example **C+20-26W-27K-C/I-AM-UNV-010V-FRST**

Series	Wattage	CCT	Distribution	Finish	Voltage	Dimming	Options
C+20 Cricket+20	**26W** 26 Watt **37W** 37 Watt (max) (25°C max ambient tempreture) **XX** Specify wattage must be below max	80 CRI std. **27K** 2700K **3K** 3000K **35K** 3500K **4K** 4000K **AMB**** Static Amber **RED**** Static Red **RGBW4*** 16.5W C/M Only 4K-White **RGBW27*** 16.5W C/M Only 27K-White	**C/I** 8° **C/M** 30° **A/M** Asymmetric Wall Washer 30°	**AM** Aluminum Metallic **IG** Iron Gray **IR** Iron Rust **BK** Textured Black **WH** Textured White **SS** Stainless Steel **CC** Custom Color Color	**UNV** 120-277V *not for RGBW	**010V** 0-10V Dimming Driver **ELV** 120V Line-Voltage Dimming Driver For more Options Contact Factory	**FRST** Frosted glass (26W max) **NS** Non-Slip glass **LVR** Hex louver **TP** Tamper proof hardware

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

INCLUDED ACCESSORIES

DESCRIPTION	FINISH PART NUMBER
CRICKET+ 20	
Recessed fixing kit	3111135

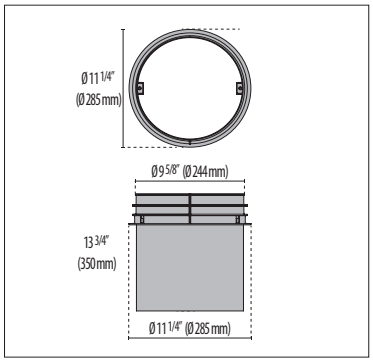

3111135


OPTIONAL RGBW ACCESSORIES

DESCRIPTION	FINISH PART NUMBER
Controls	
Kit driver 48V	17433
Kit driver 48V Wet Location	17096





Product is supplied with integral DMX controllers and remote 48VDC power supply. Controls by others.

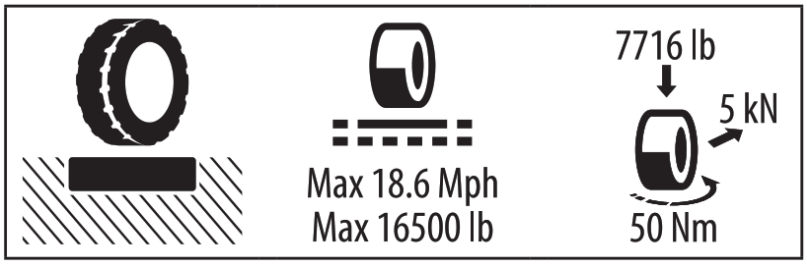

Performance in Lighting reserves the rights to make all necessary changes without prior notice.
Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com