


TYK+ 30



Long-lasting energy-efficient flood and accent light series for lighting landscapes, trees, columns, monuments, and architectural details.


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing, and adjustable stainless steel mounting bracket.
- Stainless steel graduated ferrules for aiming purposes on both sides of the fixture.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- NEMA 2H X 2V light distribution (C/I)
- NEMA 4H X 4V light distribution (C/M)

- NEMA 5H X 5V light distribution (C/IW)
- NEMA 5H X 5V light distribution (ELL).
- High-transmittance transparent optics.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Standard tear-proof nickelled brass cable gland M20x1.5 for cables Ø0.4" - Ø0.55"
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for additional optic options.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

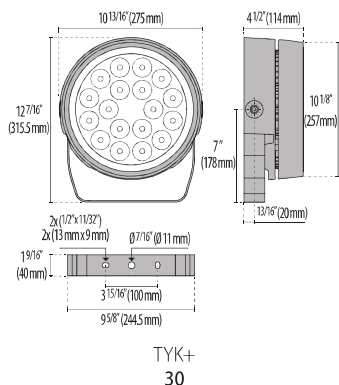

Lumen Output	3K	4K
TYK+30 C/I 60W	5135	5543
TYK+30 C/I 85W	6547	7067
TYK+30 C/IW 60W	5575	6019
TYK+30 C/IW 85W	7109	7674
TYK+30 C/M 60W	5739	6195
TYK+30 C/M 85W	7318	7899
TYK+30 35°x 65° 60W	3487	3764
TYK+30 35°x 65° 85W	4446	4779



Scan here
for installation
instructions

Order Guide - TYK+30



Order code example

TYK+30-C/I-60-AM-3K-UNV-NA-AGS

Series	Optics	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
TYK+30	C/I 10° Beam C/IW 65° Beam C/M 34° ELL 35°x65°	60 60 watt 85 85 watt (max) XX Specify Wattage Must be below max	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	27K* 2700k 3K 3000k 35K 3500k 4K 4000k 6K* 6000k *Consult Factory for MOQ	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver	AGS Anti-Glare Snoot ERB Extra rotation bracket JBOX Jbox cover Plate 2AB Two Axis Rotation bracket for gliding support GS Gliding support (3 9/16" poles) P8 8' Pole Ø 3.5" P10 10' Pole Ø 3.5" P12 12' Pole Ø 3.5" P14 14' Pole Ø 3.5" P16 16' Pole Ø 3.5" PXX Specify Pole height XX'CABLE Specify length of factory installed cable 3' Standard HEX External Hex Louver (must be used with snoot) BABAA Build America Buy America Act compliant (not available for all options)

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 14
06/25

OPTIONAL ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
Optical accessories		
Anti-glare snoot	●	3107469
External Hex Louver	●	1394-30
Wall mount		
JBox cover plate - Iron gray	●	07959
Surface mount		
Extra rotation bracket +55°/-90°	●	3108558
Pole mount		
Two-axis rotation bracket for gliding support	●	3107473
Gliding support made of painted aluminium for the installation on Ø 3 9/16" / Ø 90 mm posts		
Pole 8" Ø 3.5"	●	14099696
Pole 8" Ø 3.5"	●	71408353
Pole 10" Ø 3.5"	●	71410353
Pole 12" Ø 3.5"	●	71412353
Pole 14" Ø 3.5"	●	71414353
Pole 16" Ø 3.5"	●	71416353




3107469



07959




3108558



3107473



14099696



71408353
71410353
71412353
71414353
71416353



1394-30
External hex-cell louver
(must be used with snoot)


OPTIONAL ACCESSORIES (ordered separately)

POLES FOR TYK+

When ordering, please specify quantity of fixture per pole as well as installation location (city & state)

Order code example: 714 20 35 3

Material	Height (ft)	Pole Diameter (in)	Custom Options (blank is standard)	Finish (additional characters may follow for factory information)
714 Aluminum*	08 8' tall	35 Ø3.5"	DBx Direct Burial** (x = depth below grade, measured in feet)	1 Aluminum Metallic
715 Steel*	10 10' tall			2 Black
716 Wood*	12 12' tall		GFCI integrated GFCI outlet**	3 Iron Gray
	14 14' tall		BA Banner Arms** (contact factory for details)	4 Iron Rust
	20 20' tall			5 White
	40 40' tall			6 Custom Color (specify RAL#)
	Custom heights available, contact factor for details. Some restrictions apply for wood poles.			W1 Wood - Caramel - smooth
			**some options not available with wood poles - contact factory for details.	W12 Wood - Vanilla - brushed
				For more, see below.

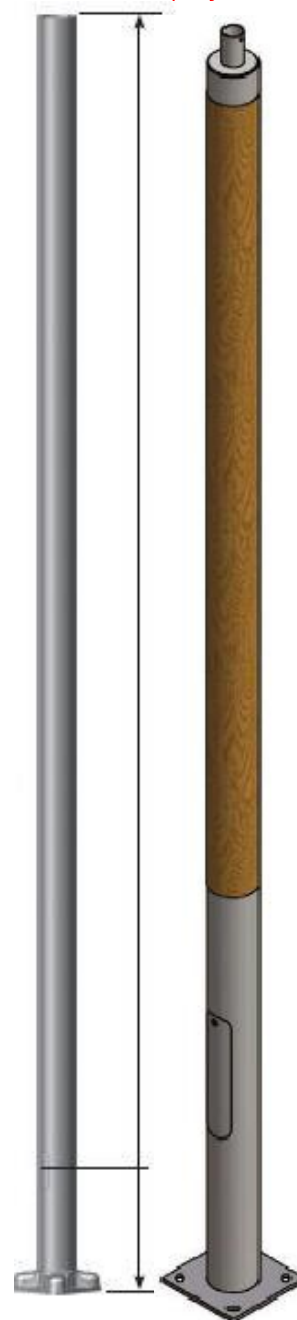

WOOD GRAIN FINISH OPTIONS:

W1 CAMEL	W11	W4 SAFFRON	W14	W7 CINNAMON	W17
W2 VANILLA	W12	W5 NUTMEG	W15	W8 TOPAZ	W18
W3 COCOA	W13	W6 SLATE	W16	W9 ONYX	W19

Base cover shape and bolt circle diameter (BCD) will vary based on pole size and vendor. Contact factory for details related to your project.