


CRICKET+10



In-ground series. Fixtures consist of:

- Copper-free die-cast corrosion-resistant aluminum housing and trim.
- Copper-free die-cast corrosion-resistant aluminum housing.
- AISI 316 stainless steel trim.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Frosted, tempered, silk-screened, flat glass diffuser (C/EW versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transmittance transparent optics.
- Circular Intensive beam angle (C/I).
- Circular Medium beam angle (C/M).
- Diffuse light emission (C/EW).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Pre-wired factory sealed cable for external electrical connection included.

- Each rough-in kit is provided with a protective faceplate to avoid possible deformations during the installation in concrete to simplify installation.
- Thermoplastic compression-molded rough-in kit can be ordered separately.
- For outdoor inground applications, provide drainage gravel at least 12" below the rough-in or a suitable drainage system.
- Frosted (FRST) and Non-Slip (NS) glass option available - add suffix to any part number.
- Consult factory for additional optic options.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.

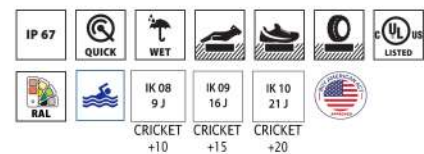

FINISHES

- AN-96 / Iron gray / Textured
- INOX / Stainless steel / Matt
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

Lumen Output	27K	3K	35K	4K	5K
Cricket+10 C/EW	127	132	137	142	147
Cricket+10 C/I	400	415	430	446	461
Cricket+10 C/M	391	406	421	436	451

6W Max Wattage



Scan here
for installation
instructions

FIXTURES INCLUDE 120-277V 50/60HZ INTEGRAL DRIVERS UNLESS OTHERWISE NOTED

Revision 21
06/25

Order Guide - Cricket+10



Order code example


C+10-6-C/I-AM-3K-NA-FRST

C+10

Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Options
C+10 Cricket+10	4 4 watt Cricket +10 Only remote only	C/I 8°	AM Aluminum Metallic	27K 2700K	UNV 120-277V not suitable for RGBW	NA Non Dimming 0-10V 0-10V Dimming Remote only +10	RDR Remote Driver FRST Frosted Glass NS Non-Slip Glass LVR Hex Louver BABAA Build America Buy America Act Compliant (not available for all options)
	6 6 watt Cricket +10 Max XX Specify wattage must be below max	C/M 30° C/EW 88°	IG Iron Gray IR Iron Rust BK Textured Black WH Textured White BRS Brass (+10 Only) INOX Stainless Steel CC Custom Color	3K 3000k 35K 3500K 4K 4000k AMB** Static Amber RED Static Red RGBW* 3.5W Max 4K White C/M Optics Tunable White* C/M optics *Consult factory for control details **Consult factory for MOQ			


INCLUDED ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
CRICKET+ 10		
Recessed fixing kit		3109879
Recessed fixing kit - RGBW/TW		3113571



3109879


Rough-in Kit CRICKET+ 10 RGBW/TW

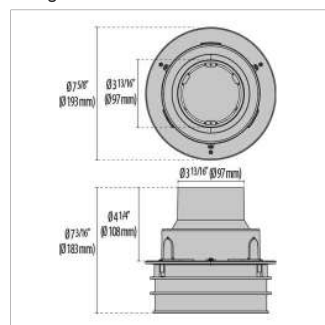

3113571

OPTIONAL RGBW ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
Controls		
Kit driver 48V		17433
Kit driver 48V Wet Location		17096



Product is supplied with integral DMX controllers, and remote 48VDC power supply. Controls by others.

TECHNICAL DATA

CRICKET+10

