


BLIZ OVAL



Fixture shown with vertical signage

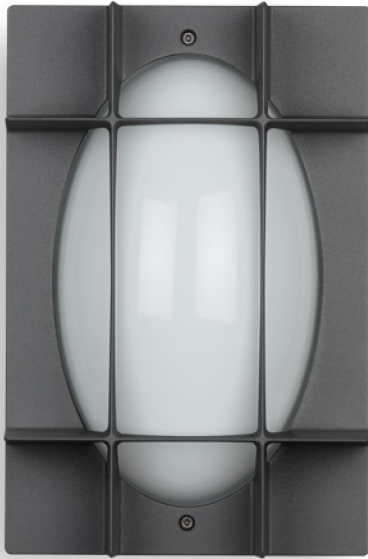

Fixture shown with horizontal signage



Wall mount series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and ring/faceplate.
- High transmittance, internally coated, pressed glass diffuser, thermally, and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation


and promote long LED life.

- 100% uniform diffused light emission.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details.
- Product meets Buy American Act (BAA) requirements within ARRA.
- 5-year warranty.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

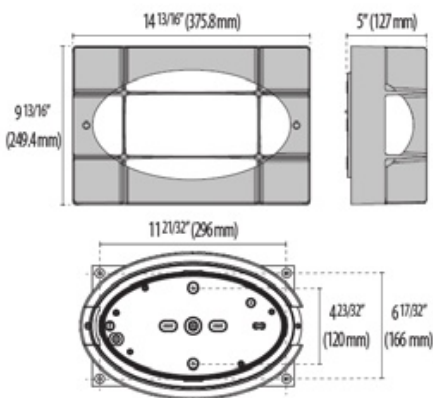

BLIZ OVAL

24W Max Wattage

Order Guide - Bliz Oval



Order code example

BO-

--	--	--	--	--	--

Wattage	Finish	Color Temperature	Voltage	Controls	Options
24W (max)	AM Aluminum Metallic	27K 2700K	120 120 volts	NA Non Dimming	VSIGN Vertical Signage
XX Specify wattage must be under max	IG Iron Gray	3K 3000K	277 277 volts	0-10V 0-10V Dimming	HSIGN Horizontal Signage
	IR Iron Rust	35K 3500K		ELV ELV Dimming	
	BK Textured Black	4K 4000K			
	WH Textured White	5K 5000K			
	CC Custom Color	65K 6500K			
		RED Static Red			
		BLUE Static Blue			
		GRN Static Green			
		AMB Static Amber			