



Pathway bollard series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) precision die-cast aluminum housing and top cap.
- Copper-free (<1%) aluminum extruded post.
- Corrosion-resistant AISI 316 stainless steel post and top cap.
- Clear UV-stabilized, high-impact resistant diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transparency polycarbonate optics for optimized light transmission.
- Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.


- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- Steel ground base plate included for bollards.
- Anchor bolts available for bollards (ordered separately).
- Suitable for most coastal applications (stainless steel versions).
- 5-year warranty.
- DarkSky approved in 3000K or below.




FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- INOX / Stainless steel / Matt
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

KHA TECH 5

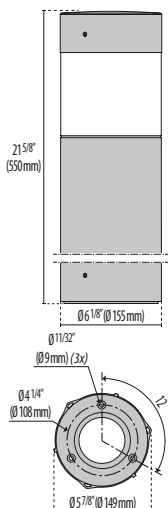

KHA TECH 9

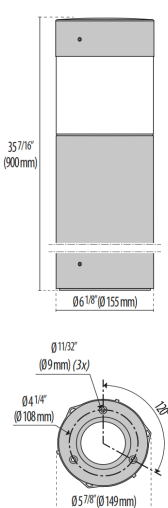

Lumen Table

KHA Tech 5/9	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
5W	423	484	503	511	529	529	518	516
10W	845	967	1006	1023	1058	1058	1036	1033
15W	1268	1451	1509	1534	1587	1587	1554	1549



Scan here for
installation
instructions

Performance in Lighting reserves the rights to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Rev. 09/12/2026

Order code example

KHAT-5-5W-3K-SS-UNV-010V-DB


Series	Bollard Height	Wattage	CCT	Finish	Voltage	Dimming	Options/ Accessories	
KHAT KHA Tech 5/9	5 22 Inch	5W 5 watt	80 CRI std.	SS Stainless Steel	UNV 120-277V	010V 0-10V Dimming Driver	DB Internal louver (horizontal)	
	9 35 Inch	10W 10 watt	22K 2200k	AM Aluminum Metallic	120V 120V only	ELV 120V Line- Voltage Dimming Driver	HSS House side shield	
	42 42 Inch	15W 15 watt	27K 2700k	IG Iron Gray	347V Integral Transformer	Base details on following page	FRST Frosted diffuser	
	XX Specify height must be min 22"		3K 3000k	IR Iron Rust	480V Integral Transformer		SB Square base	
			35K 3500k	BK Textured Black			HUB Heavy use base	
			4K 4000k	WH Textured White			EMPK Integral 15W EMPK	
			5K 5000k	CC Custom Color			RGFCI Recessed outlet with cover GFCI/USB (Not available with KHA Tech 5)	
			57K 5700k					
		65K 6500k						

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

REQUIRED FOR INSTALLATION **Included with Fixture****OPTIONAL ACCESSORIES**

DESCRIPTION	FINISH	PART NUMBER
KHA TECH		
Concrete mounting adaptor with stainless steel plate and galvanised steel rods		14049320

DESCRIPTION	FINISH	PART NUMBER
KHA TECH		
BASE INOX HU KHA USA		07966
BASE INOX FR KHA USA		07967

**14049320****07966****07967**