

KHA CITY 24

PERFORMANCE
IN LIGHTING

powered by
GEWISS



Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) precision die-cast aluminum housing and top cap.
- Copper-free (<1%) aluminum extruded post.
- Corrosion-resistant AISI 316 stainless steel post and top cap.
- Clear UV-stabilized, high-impact resistant diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transparency polycarbonate optics for optimized light transmission.
- Type III light distribution.
- Type V light distribution.
- Marine Grade Finish.
- 5-year warranty.

- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- Steel ground base plate included for bollards.
- Concrete installation fixing rods available (ordered separately).
- Bolt-on root galvanized steel plinth or stainless steel flange plate (anchor plugs not included) floor mounting options available for all KHA CITY 24 options (ordered separately)
- Suitable for most coastal applications (stainless steel versions).
- DarkSky approved in 3000K or below.
- Rated for 100-mph wind load - custom poles available for higher wind loads upon request.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- INOX / Stainless steel / Matt
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

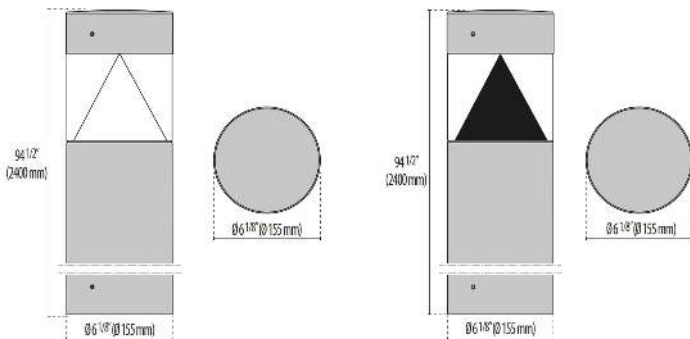

KHA CITY 24

KHA CITY COMFORT 24



Scan here for
installation instructions

PERFORMANCE IN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE IN LIGHTING USA, Inc.
2621 Keys Pointe Conyers GA 30013 - United States
Tel: 770 822 2115

info.usa@pil.lighting
www.performanceinlighting.com

REVISION 12
06/25

Order Guide –KHA CITY 24



Order code example: KHACTION12-47-20W-T3-4K-BK-UNV-0-10V

| SERIES | Bollard Height | Wattage | Optics | CCT | Finish | Voltage | Controls | Accessories |
|---|--|---|--------------------------|---|---|--|---|--|
| KHACTION24 Kha City 24 | 94 94 inch* (max) | 10W 10 watt | T3 Type 3* 20W Max | 22K 2200K | BK Textured Black* | UNV 120-277V* | NA Non Dim | DB Direct Burial Base |
| KHACTION24C Kha City Comfort 24 | 24 24 inch (min) | 15W 15 watt | T5 Type 5* 23W Max | 27K 2700K | IG Iron Gray* | 120V 120V Only | 0-10V 0-10V Dimming Driver* | EMPK Integral 15W EMPK |
| KHACTION24M Kha City Marine 24 *Stainless Steel Only* | XX Specify bollard height must be within range | 20W 20 watt* 23W 23 watt* XX Specify wattage must be within range *Standard Wattages T3- 20W T5- 23W | | 3K 3000K* 35K 3500K 4K 4000K* 5K 5000K 57K 5700K 65K 6500K | AM Aluminum Metallic WH Textured White IR Iron Rust SS Stainless Steel *Marine Only CC Custom Color* | 347V Integral Transformer 480V Integral Transformer | ELV 120V Line- Voltage Dimming Driver Contact Factory For EMPK Battery Back up Options | BABAA Build America Buy America Act compliant (not available for all options) RGFCI Recessed outlet with cover GFCI/USB |

STANDARD OPTION, SHORTER LEAD TIME, NO MOQ
 TEMPLATE AND ANCHOR BOLTS INCLUDED WITH FIXTURE
 80 CRI STANDARD - OTHER OPTIONS AVAILABLE

KHA CITY 24

REQUIRED FOR INSTALLATION Included with Fixture

| DESCRIPTION | FINISH | PART NUMBER |
|--|--------|----------------|
| KHA CITY | | |
| CONCRETE MOUNTING ADAPTOR WITH STAINLESS STEEL PLATE AND GALVANISED STEEL RODS | | 3115347 |
| BASE KHA CITY 24 USA | | 07968 |




3115347



07968

OPTIONAL ACCESSORIES

| DESCRIPTION | FINISH | PART NUMBER |
|------------------------------------|--------|--------------|
| KHA CITY | | |
| DIRECT BURIAL BASE KHA CITY 24 USA | | 07969 |



07969

LUMEN OUTPUT Distributed Lumen Output

| KHA CITY 24 (80CRI) | | | | | | | | |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 2200K | 2700K | 3000K | 3500K | 4000K | 5000K | 5700K | 6500K |
| 10W COMFORT (Type III) | 358 | 623 | 638 | 650 | 665 | 665 | 663 | 663 |
| 10W (Type III) | 423 | 711 | 729 | 743 | 761 | 761 | 758 | 758 |
| 15W COMFORT (Type III) | 532 | 927 | 951 | 968 | 991 | 991 | 988 | 988 |
| 15W (Type III) | 629 | 1060 | 1086 | 1107 | 1133 | 1133 | 1129 | 1129 |
| 20W COMFORT (Type III) | 821 | 1259 | 1290 | 1314 | 1345 | 1345 | 1341 | 1341 |
| 20W (Type III) | 972 | 1438 | 1474 | 1502 | 1538 | 1538 | 1533 | 1533 |
| 10W COMFORT (Type V) | 715 | 818 | 851 | 859 | 895 | 895 | 876 | 874 |
| 10W (Type V) | 846 | 968 | 1007 | 1017 | 1060 | 1060 | 1038 | 1034 |
| 15W COMFORT (Type V) | 1063 | 1216 | 1265 | 1278 | 1330 | 1330 | 1303 | 1299 |
| 15W (Type V) | 1258 | 1439 | 1497 | 1512 | 1575 | 1575 | 1542 | 1537 |
| 23W COMFORT (Type V) | 1643 | 1879 | 1955 | 1974 | 2056 | 2056 | 2014 | 2007 |
| 23W (Type V) | 1944 | 2224 | 2313 | 2337 | 2434 | 2434 | 2384 | 2376 |

80 CRI STANDARD - OTHER OPTIONS AVAILABLE