

INSERT+ ZERO BOLLARD



Pathway bollard series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) precision die-cast aluminum housing and ring/faceplate.
- Copper-free (<1%) aluminum extruded post.
- Frosted, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- To be used with a 24 V low-voltage driver (ordered separately, consult factory for more information).
- Optional, integral, line-voltage, passive infrared motion sensor (PIR SENSOR versions).


- Pre-wired factory sealed cable for external electrical connection included.
- Steel ground base plate included for bollards.
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- Product meets Buy American Act (BAA) requirements within ARRA.
- 5-year warranty.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

Lumen Output	3K	4K
INSERT+ZERO BOLLARD	254	257

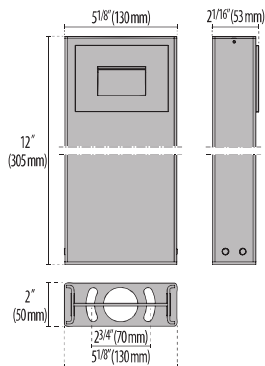

Scan here for
installation instructions

Order Guide – INSERT+0 BOLLARD



Order code example:

I+0BOL						
SERIES	Height	Wattage	CCT	Finish	Voltage	Accessories
I+0BOL Insert+0 Bollard	<p>12 12" (min) standard height</p> <p>40 40" (max)</p> <p>XX specify height below max</p>	<p>5 5W* (max)</p>	<p>30K 3000K</p> <p>40K 4000K</p>	<p>AM Aluminum Metallic*</p> <p>IG Iron Gray*</p> <p>IR Iron Rust</p> <p>BK Textured Black</p> <p>WH Textured White*</p> <p>CC Custom Color</p>	<p>24V 24V Low-voltage only</p>	<p>RDR Remote LED Driver (One Per Fixture) 17097</p> <p>RDRDIM Remote 0-10V LED Driver (1-15 Fixtures) 17029</p>

STANDARD OPTION, SHORTER LEAD TIME, NO MOQ

80 CRI STANDARD - OTHER OPTIONS AVAILABLE