

INSERT+ 1V BOLLARD



Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) precision die-cast aluminum housing and ring/faceplate.
- Copper-free (<1%) aluminum extruded post.
- Frosted, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- To be used with a 24 V low-voltage driver (ordered separately, consult factory for more information).
- Optional, integral, line-voltage, passive infrared motion sensor (PIR SENSOR versions).

- Pre-wired factory sealed cable for external electrical connection included.
- Aluminum ground base plate included for bollards.
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- Product meets Buy American Act (BAA) requirements within ARRA.
- 5-year warranty.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

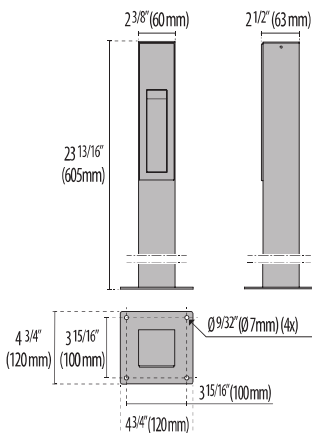

Lumen Output	3K	4K
INSERT+ 1V BOLLARD	319	333



Scan here for
installation instructions

Order Guide – INSERT+1V BOLLARD



Order code example: I+1VBOL-5W-30K-WH-120V

I+1VBOL						
SERIES	Wattage	CCT	Finish	Voltage	Controls	Accessories
I+1V BOLLARD Insert+1V Bollard	5 5W* (max)	30K* 3000K 40K* 4000K	AM Aluminum Metallic* IG Iron Gray* IR Iron Rust BK Textured Black WH Textured White* CC Custom Color	24V 24V Low-voltage only		RDR Remote LED Driver (One Per Fixture) 17097 RDRDIM Remote 0-10V LED Driver (1-15 Fixtures) 17029 Contact Factory for Remote driver options

STANDARD OPTION, SHORTER LEAD TIME, NO MOQ
80 CRI STANDARD - OTHER OPTIONS AVAILABLE