


MIMIK 10 PANEL

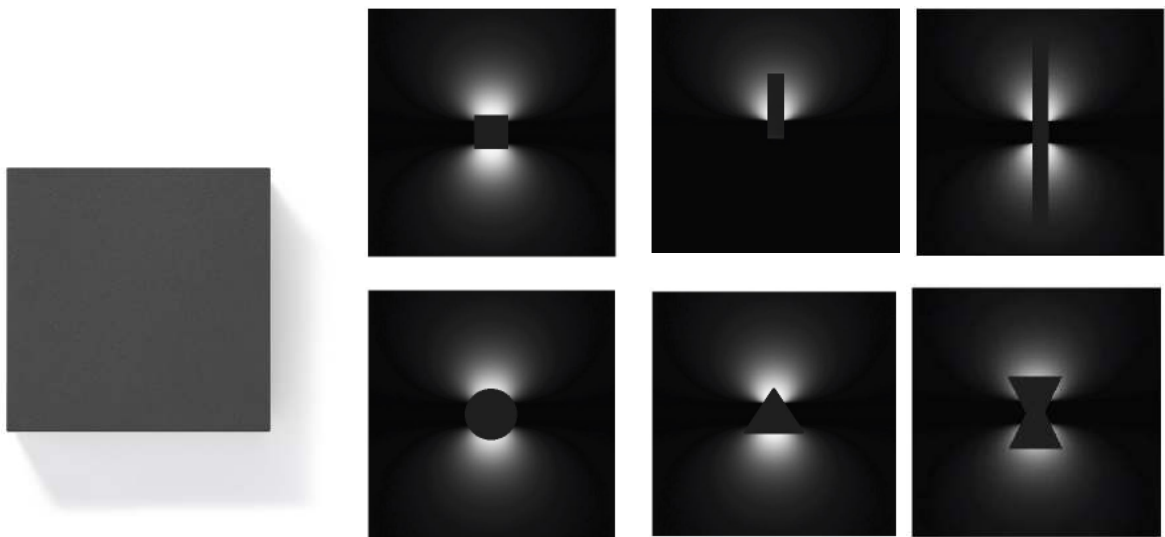

Wall sconce series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- DarkSky approved when ordered with single light emission only, and in 3000K or below.

- Single (M) or dual (B) light emission.
- IESNA Type III light distribution (FLAT).
- IESNA Type III light distribution.
- 20° x 20° beam angle (C/I).
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Customizing facade faceplate available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.




FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured



MIMIK
10 FLAT



MIMIK
10

Scan here
for installation
instructions



WATTAGE	
MIMIK 10 M T3	5W
MIMIK 10 M T3	10W
MIMIK 10 M C/I	5W
MIMIK 10 M C/I	10W
MIMIK 10 FLAT M	5W
MIMIK 10 FLAT M	10W
MIMIK 10 FLAT B	10W
MIMIK 10 B C/I	10W
MIMIK 10 B C/I+T3	10W

LUMEN OUTPUT		2700K	3000K	3500K	4000K
MIMIK 10 M T3	5W	292	314	336	358
MIMIK 10 M T3	10W	505	542	579	617
MIMIK 10 M C/I	5W	307	349	390	432
MIMIK 10 M C/I	10W	607	653	699	745
MIMIK 10 FLAT M	5W	440	451	462	473
MIMIK 10 FLAT M	10W	751	771	790	810
MIMIK 10 FLAT B	10W	857	880	902	925
MIMIK 10 B C/I	10W	725	779	833	888
MIMIK 10 B C/I+T3	10W	657	707	756	806

Order Guide - Mimik 10

Order code example

M10F-B-AM-27K-120V-NA

M10-

Housing Style	Light Emission	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
M10 Standard M10F Flat <small>*Flat Housing is only suitable for T3 Distribution</small>	M (One-Way) Fixture offset from center of panel B (Two-Way) Fixture centered behind panel	5W 5 watts 10W 10 watts (max) XX Specify wattage must be below max	Standard Housing only Select one for M & two for B Leave Blank for Flat Housing T3 Type III T4 Type IV C/I 20° beam 10 10° Beam 40 40° Beam 56 56° Beam	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	27K 2700k 3K 3000k 35K 3500k 4K 4000k RED Static Red GRN Static Green BLU Static Blue AMB Static Amber 590nm RGBW RGBW (flat only)	UNV 120-277V	(When selecting Flat housing, or B (two-way) emmissions, these options must be remote) NA Non Dimming 0-10V 0-10V Dimming ELV 120V Line-Voltage Dimming Driver	(See pictures below) REM Remote mounted Emergency battery back up RDR Remote driver CON2 (double-gang j-box, adaptor plate and 1/2" knockouts) CON4 (double-gang j-box, adaptor plate and 3/4" knockouts) BABAA Build America Buy America Act compliant PANEL OPTIONS SP 8" Square Panel L24 24" Vertical Panel L33 33" Vertical Panel RP 7" Round Panel Wedge Wedge Panel D-Wedge Double Wedge Panel


80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Performance in Lighting reserves the right to make all necessary changes without prior notice.

 Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

 Revision 12
 04/25

MIMIK 10



Square Panel




L24 Panel
M Fixture
offset from
center




L33 Panel
B Fixture
centered
behind panel




Signage Panel
Mounts behind
fixture must
specify signage




CON 2/4
Surface Mounted
J-box with Conduit
Entry




Round 7" Panel



Wedge Panel



Double Wedge Panel



Fascade Cover
Blend fixture
into exterior
fascade

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP