

KHA SLIM RIBBON



Slim area and site lighting series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free aluminum extruded post.
- Copper-free precision die-cast aluminum housing and top cap.
- Corrosion-resistant AISI 316 stainless steel post and top cap.
- Satin UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Diffuse light emission.
- IESNA Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.

- Anchor bolts available for bollards (ordered separately).
- Suitable for most coastal applications (stainless steel versions).
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom post height options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.




FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- INOX / Stainless steel / Matt
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

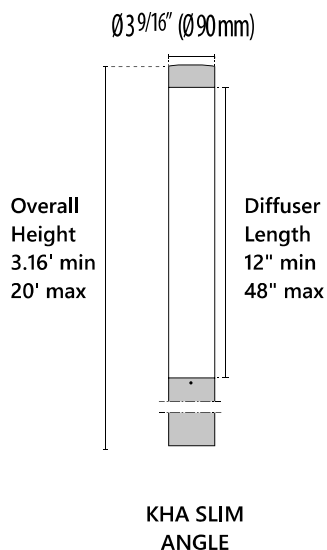

Lumen Output	Wattage	4K /80CRI
12" Diffuser	25W max	2595lm
24" Diffuser	50W max	5190lm
48" Diffuser	75W max	7800lm

Contact factory for other CCT's and reduced lumen options

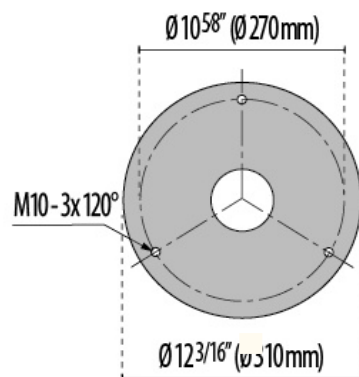

Base Details



Scan Here for
Installation Instructions



Order Guide - Kha Slim Ribbon

Order code example

KHA-RIB-XX-24-50-SS-3K-120-NA-DB

KHA-RIB

Overall Column Height	Diffuser Size	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
60 60 inch 12" diffuser min 72 72 inch 24" diffuser min 96 96 inch 48" diffuser min XX Specify Height Must be within range	12 12" diffuser 25W Max 24 24" diffuser 50W Max 48 48" diffuser 85W Max 48 inch is the max diffuser length	25 25 watt 40 40 watt 50 50 watt 75 75 watt 85 85 watt max (30°C/86°F ambient) XX Specify Wattage Must be below max	SS Stainless Steel 96" Max OAH AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	27K 2700k 3K 3000k 35K 3500k 4K 4000k 5K 5000k 65K 6500k RED Static Red BLU Static Blue GRN Static Green AMB Static Amber RGBW RGBW* Only available with 24" diffuser See below for control details	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming Driver ELV 120V Line- Voltage Dimming Driver	DB Direct Burial must specify DB depth BABAA Build America Buy America Act compliant

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Revision 06
04/25

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP