

KHA SLIM RIBBON



Slim area and site lighting series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free aluminum extruded post.
- Copper-free precision die-cast aluminum housing and top cap.
- Corrosion-resistant AISI 316 stainless steel post and top cap.
- Satin UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Diffuse light emission.
- IESNA Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.

- Anchor bolts available for bollards (ordered separately).
- Suitable for most coastal applications (stainless steel versions).
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom post height options.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES


- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- INOX / Stainless steel / Matt
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

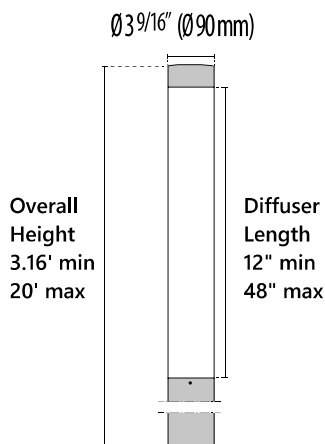

KHA SLIM
ANGLE

Lumen Output	Wattage	4K /80CRI
12" Diffuser	25W max	2595lm
24" Diffuser	50W max	5190lm
48" Diffuser	75W max	7800lm

Contact factory for other CCT's and reduced lumen options

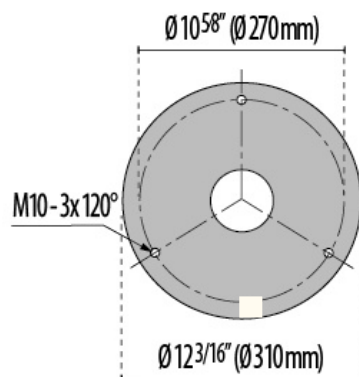

Base Details



Scan Here for
Installation Instructions



Order Guide - Kha Slim Ribbon

Order code example KHA-RIB-XX-24-50-SS-3K-120-NA-DB

KHA-RIB

Table with 8 columns: Overall Column Height, Diffuser Size, Wattage, Finish, Kelvin, Voltage, Controls, Accessories. It lists various specifications for the Kha Slim Ribbon lighting product, including diffuser sizes (12, 24, 48 inches), wattages (25, 40, 50, 75, 85 watts), finishes (SS, AM, IG, IR, BK, WH, CC), Kelvin temperatures (27K, 3K, 35K, 4K, 5K, 65K, BLU, GRN, AMB), voltage (UNV 120-277V), controls (NA, 0-10V, ELV), and accessories (DB, BABAA).

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Revision 07
06/25

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP