KHA SLIM RIBBON

Slim area and site lighting series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free aluminum extruded post.
- Copper-free precision die-cast aluminum housing and top cap.
- Corrosion-resistant AISI 316 stainless steel post and top cap.
- Satin UV-stabilized diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Diffuse light emission.
- IESNA Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Anchor bolts available for bollards (ordered separately).
- Suitable for most coastal applications (stainless steel versions).
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom post height options.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.

IP 66 · WET · UL LISTED · 79 · 1-10 V · RAL · IK 08 6 J

FINISHES

- **AN-96** / Iron gray / Textured
- **BK-81** / Black / Textured
- **INOX** / Stainless steel / Matt
- **GR-94** / Aluminum metallic / Textured
- **WH-87** / White / Textured
- **RB-10** / Iron rust / Textured

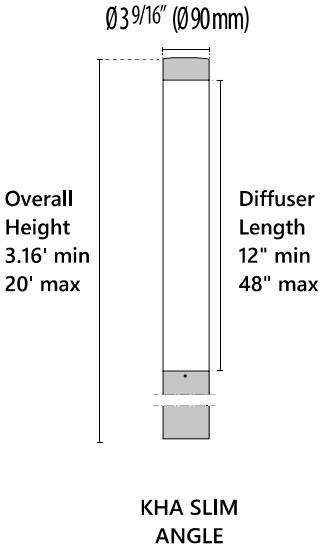

KHA SLIM ANGLE

Lumen Output	Wattage	4K /80CRI
12" Diffuser	25W max	2595lm
24" Diffuser	50W max	5190lm
48" Diffuser	75W max	7800lm

Contact factory for other CCT's and reduced lumen options

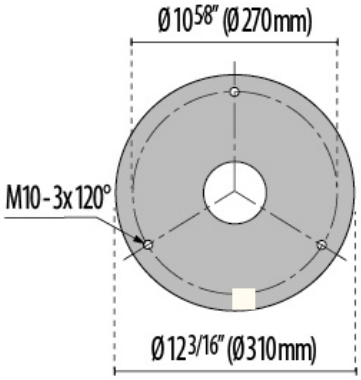

Base Details

Scan Here for Installation Instructions

Revision 08
01/26

Order Guide - Kha Slim Ribbon

Order code example	KHA-RBN-XX-24-50-SS-3K-120-NA-DB

KHA-RBN								
Overall Column Height	**Diffuser Size**	**Wattage**	**Finish**	**Kelvin**	**Voltage**	**Controls**	**Accessories**
60 60 inch 12" diffuser min **72** 72 inch 24" diffuser min **96** 96 inch 48" diffuser min **XX** Specify Height Must be within range	**12** 12" diffuser 25W Max **24** 24" diffuser 50W Max **48** 48" diffuser 85W Max 48 inch is the max diffuser length	**25** 25 watt **40** 40 watt **50** 50 watt **75** 75 watt **85** 85 watt max (30˚c/86˚f ambient) **XX** Specify Wattage Must be below max	**SS** Stainless Steel 96" Max OAH **AM** Aluminum Metallic **IG** Iron Gray **IR** Iron Rust **BK** Textured Black **WH** Textured White **CC** Custom Color	**27K** 2700k **3K** 3000k **35K** 3500k **4K** 4000k **5K** 5000k **65K** 6500k **RED** Static Red **BLU** Static Blue **GRN** Static Green **AMB** Static Amber **RGBW** RGBW* Only available with 24" diffuser See below for control details	**UNV** 120-277V	**NA** Non Dimming **0-10V** 0-10V Dimming Driver **ELV** 120V Line-Voltage Dimming Driver	**DB** Direct Burial must specify DB depth **BABAA** Build America Buy America Act compliant (not available for all options)

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Revision 08
01/26

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

REMOTE RGBW ACCESSORIES

Power Supply

17433
Kit driver 48V

17096
Kit driver 48V WP

RF Controls

3104173
RGBW RF controller 4 channel
(0.35A each CH)

31041730
RGBW RF controller WP 4 channel
(0.35A each CH)

310429
RGBW hand held remote

DMX Controls

178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)

1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)

11015
Terminating Resistor

110150
Terminating Resistor WP