

MIMIK 10 BOLLARD WOODGRAIN

PERFORMANCE
IN LIGHTING

powered by
GEWISS



Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) precision die-cast aluminum housing and ring/faceplate.
- Copper-free (<1%) aluminum extruded post.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Type II light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Optional, integral, line-voltage, passive infrared motion sensor (PIR SENSOR versions).

- Pre-wired factory sealed cable for external electrical connection included.
- Steel ground base plate included for bollards.
- Steel ground base plate available as accessory for HU versions (ordered separately).
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- 5-year warranty.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

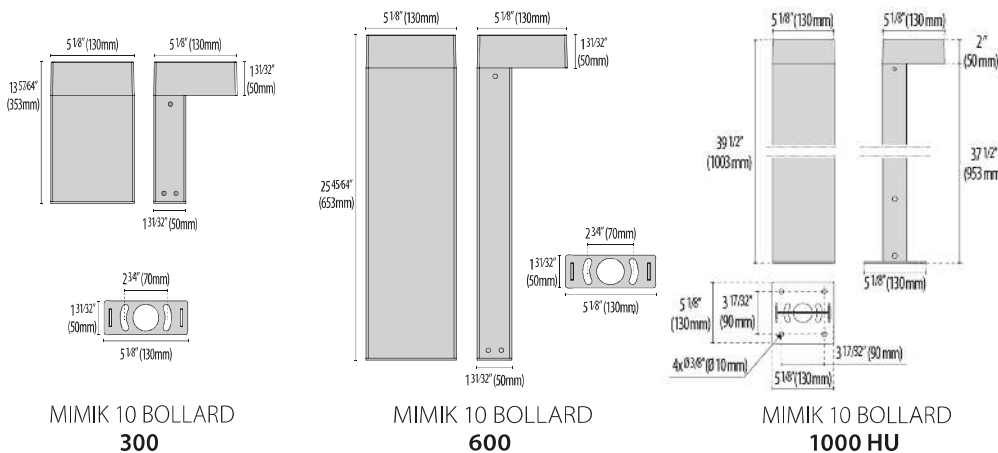

Scan here
for installation
instructions

PERFORMANCE IN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE IN LIGHTING USA, Inc.
2621 Keys Pointe Conyers GA 30013 - United States
Tel: 770 822 2115

info.usa@pil.lighting
www.performanceinlighting.com/us

REVISION 06
06/25

Order Guide – MIMIK 10 BOLLARD WOODGRAIN

Order code example: **M10BOLWG-**



M10BOLWG-

Woodgrain Option	Bollard Height	Wattage	Optics	CCT	Finish	Voltage	Controls	Accessories
WGF1	300	10W	T2	27K	BK	UNV	NA	GFCI
WGF2	14 inch*	10 watt*	Type 2 (11W Max)	2700K	Textured Black	120-277V*	Non Dim*	20 amp outlet
WGF3	600	11W	T3	3K	IG	120V	0-10V	OCC
WGF4	26 inch*	11 watt*	Type 3 (10W Max)	3000K*	Iron Gray*	120V Only	0-10V Dimming Driver	Occupancy Sensor ON/OFF
WGF5	1000HU	XX		35K	AM			
WGF6	39 inch			3500K	Aluminum			
WGF7	Heavy Use*	Specify wattage must be within range		4K	Metallic*		ELV	HI/LO
WGF8	XX			4000K*			120V Line-Voltage Dimming Driver	Occupancy Sensor HI/LO
WGF9	Specify Height (10 inch min)			5K	WH			LB
WGF10				5000K	Textured White			Large base
WGF11				65K	IR			DBL
WGF12	WGF may not work for all custom heights	*Standard Wattages		6500K	Iron Rust			Double head fixture
WGF13	Contact Factory	T2- 11W T3- 10W		RED	CC			BABAA
				Static Red	Custom Color			Build America Buy America Act compliant (not available for all options)
				BLU				
				Static Blue				
				GRN				
				Static Green				
				AMB				Options Shown on Next Page
				Static Amber (turtle-friendly)				

STANDARD OPTION, SHORTER LEAD TIME, NO MOQ
70 CRI STANDARD - OTHER OPTIONS AVAILABLE

MIMIK 10 BOLLARD

LUMEN OUTPUT Distributed Lumen Output

MIMIK 10 BOLLARD (70CRI)						
	2700K	3000K	3500K	4000K	5000K	6500K
10W	614	633	652	671	690	709
11W	659	744	829	915	1000	1085

70 CRI STANDARD - OTHER OPTIONS AVAILABLE

WOODGRAIN FINISH OPTIONS



MIMIK 10 BOLLARD WOODGRAIN

PERFORMANCE
IN LIGHTING

powered by
GEWISS

GFCI / USB



Occupancy
Sensor



Double Head
Fixture



Sign



REQUIRED FOR INSTALLATION 1000 HU Only - Standard base provided with each non-HU fixture

DESCRIPTION	FINISH	PART NUMBER
MIMIK 10 BOLLARD 1000		
Plate HU MIMIK10 POST AM		3112991
Plate HU MIMIK10 POST IG		3112992

5 1/8" x 5 1/8"



3112991

5 1/8" x 5 1/8"




3112992

OPTIONAL ACCESSORIES

LB- Large Base

Suitable for all Non-HU Fixtures
painted to match fixture finish

10" x 7"



PERFORMANCE IN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE IN LIGHTING USA, Inc.
2621 Keys Pointe Conyers GA 30013 - United States
Tel: 770 822 2115

info.usa@pil.lighting
www.performanceinlighting.com/us

REVISION 06
06/25