


MIMIK 10 BOLLARD DUO

PERFORMANCE
IN LIGHTING


powered by
GEWISS

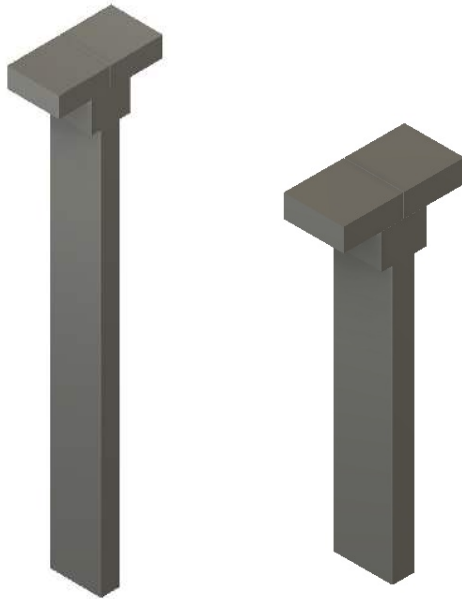

Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) precision die-cast aluminum housing and ring/faceplate.
- Copper-free (<1%) aluminum extruded post.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Type II light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Optional, integral, line-voltage, passive infrared motion sensor (PIR SENSOR versions).

- Pre-wired factory sealed cable for external electrical connection included.
- Steel ground base plate included for bollards.
- Steel ground base plate available as accessory for HU versions (ordered separately).
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- 5-year warranty.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.

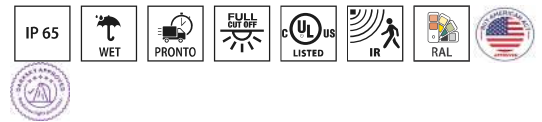

FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

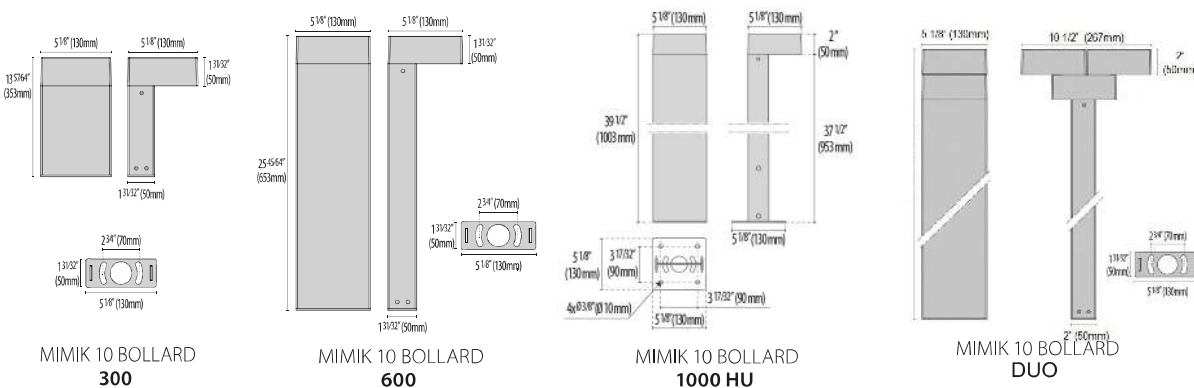

Scan here
for installation
instructions

PERFORMANCE IN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE IN LIGHTING USA, Inc.
2621 Keys Pointe Conyers GA 30013 - United States
Tel: 770 822 2115

info.usa@pil.lighting
www.performanceinlighting.com/us

REVISION 06
06/25

Order Guide – MIMIK 10 BOLLARD DUO

Order code example:



SERIES	Bollard Height	Wattage	Optics	CCT	Finish	Voltage	Controls	Accessories
M10BOLD	300 14 inch*	10W 10 watt*	T2 Type 2 (11W Max)	27K 2700K	BK Textured Black	UNV 120-277V*	NA Non Dim*	GFCI 20 amp outlet
	600 26 inch*	11W 11 watt*	T3 Type 3 (10W Max)	3K 3000K*	IG Iron Gray*	120V 120V Only	0-10V 0-10V Dimming Driver	OCC Occupancy Sensor ON/OFF
	1000HU 39 inch Heavy Use*	Please Specify Wattage for each side.		35K 3500K	AM Aluminum Metallic*		ELV 120V Line-Voltage Dimming Driver	HI/LO Occupancy Sensor HI/LO
See Mimik 10 Bollard for Single head options	XX Specify Height (10 inch min)	XX Specify wattage must be within range		4K 4000K*	WH Textured White			LB Large base
				5K 5000K	IR Iron Rust			WGF Wood Grain accent finish
				65K 6500K	CC Custom Color			DBL Double head fixture
		*Standard Wattages		RED Static Red				SIGN Custom Signage
				BLU Static Blue				BABAA Build America Buy America Act compliant (not available for all options)
				GRN Static Green				
				AMB Static Amber (turtle-friendly)				

STANDARD OPTION, SHORTER LEAD TIME, NO MOQ
70 CRI STANDARD - OTHER OPTIONS AVAILABLE

MIMIK 10 BOLLARD DUO


PERFORMANCE
IN LIGHTING

powered by
GEWISS



REQUIRED FOR INSTALLATION 1000 HU Only - Standard base provided with each non-HU fixture

DESCRIPTION	FINISH	PART NUMBER
MIMIK 10 BOLLARD 1000		
Plate HU MIMIK10 POST AM		3112991
Plate HU MIMIK10 POST IG		3112992



3112991




3112992

OPTIONAL ACCESSORIES

LB- Large Base

Suitable for all Non-HU Fixtures
painted to match fixture finish



PERFORMANCE IN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE IN LIGHTING USA, Inc.
2621 Keys Pointe Conyers GA 30013 - United States
Tel: 770 822 2115

info.usa@pil.lighting
www.performanceinlighting.com/us

REVISION 06
06/25

LUMEN OUTPUT

Distributed Lumen Output

MIMIK 10 BOLLARD (70CRI)						
	2700K	3000K	3500K	4000K	5000K	6500K
10W	614	633	652	671	690	709
11W	659	744	829	915	1000	1085

70 CRI STANDARD - OTHER OPTIONS AVAILABLE
VALUES SHOWN REPRESENT A SINGLE SIDE OF THE DOUBLE HEAD FIXTURES
DOUBLE THESE VALUES FOR A TOTAL LUMEN OUTPUT