AMON MICRO

Performance Lighting

Pathway bollard series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Robust copper-free extruded aluminum column profile and copper-free precision die-cast aluminum housing, ring/faceplate, top cap, and inspection access door.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Satin UV-stabilized, high-impact resistant diffuser (SOFT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- IESNA Type V light distribution.
- Diffuse light emission (SOFT).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Integral surge protector can withstand up to 10 kV transient line surge.
- Steel ground base plate included for bollards.
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom post height options.
- Base heavy-duty covers, anchor bolts, and direct-burial support available for AMON MINI / MAXI (ordered separately).
- 5-year warranty.
- Suitable for Natatorium applications.
- Marine Grade finish.

IP 65 | WET | cULus LISTED | 0-10 V | RAL | AMON MICRO IK 09 10 J | AMON MICRO SOFT IK 07 2 J

FINISHES

- **AN-96** / Iron gray / Textured
- **BK-81** / Black / Textured
- **GR-94** / Aluminum metallic / Textured
- **WH-87** / White / Textured
- **RB-10** / Iron rust / Textured

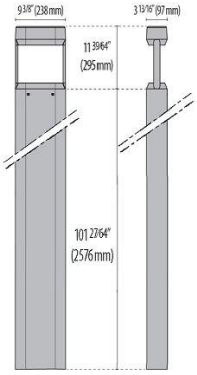

AMON MICRO

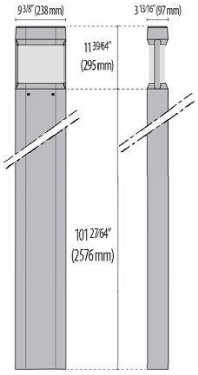

AMON MICRO SOFT

Lumen Output	27K	3K	35K	4K	5K
Amon Micro 12W	514	523	531	540	548
Amon Micro 20W	858	872	886	900	914
Amon Micro 40W	1716	1744	1772	1800	1828
Amon Micro 45W (max)	1932	1963	1994	2025	2056
Amon Micro Soft 12W	344	350	355	361	366
Amon Micro Soft 20W	575	584	593	602	611
Amon Micro Soft 40W	1150	1168	1186	1204	1222
Amon Micro Soft 45W (max)	1293	1314	1335	1357	1378

Scan here for installation instructions

Performance in Lighting reserves the rights to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Rev. 08/28/2026

Order Guide - AMON MICRO

Performance Lighting

Order code example **AMICRO-47-12W-27K-OPEN-AM-UNV-010V-BC**

Model	Height	Wattage	CCT	Distribution	Finish	Voltage	Dimming	Options/ Accessories
AMICRO Amon Micro	**47** 155 Inch (min) **114** 114 Inch (max 9.5" OAH) **XX** Specify Height Must be below max	**12W** 22 watt **20W** 20 watt **40W** 40 watt **45W** 90 watt (open max) **XX** Specify Wattage Must be below max	80 CRI std. **27K** 2700K **3K** 3000K **35K** 3500K **4K** 4000K **5K** 5000K	**OPEN** Type V **SOFT** Type V Diffuser	**AM** Aluminum Metallic **BK** Textured Black **IG** Iron Gray **IR** Iron Rust **WH** Textured White **CC** Custom Color	**UNV** 120-277V	**010V** 0-10V Dimming Driver **ELV** 120V Line-Voltage Dimming Driver *Consult Factory for Further Options*	**BC** Base cover **ANC** Template w/ anchor bolts **DB** Direct burial base **PHC1** 120V Photocell **OCC1** On/Off occupancy sensor **OCC2** Hi/Low occupancy sensor

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

OPTIONAL ACCESSORIES



Base Cover



Anchor Bolts w/ template
0.64" x17"long, 3" hook Top 3.25" threaded



Direct Burial Base