




Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) precision die-cast aluminum and top cap.
- Copper-free (<1%) aluminum extruded post.
- Clear UV-stabilized, high-impact resistant diffuser.
- Custom molded, anti-aging gasket(s).
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transparency polycarbonate optics for optimized light transmission.
- Type V light distribution **standard**. House side shield options available to limit light output to 90°, 180° & 270°.
- 5-year warranty.
- Patent optical system IN SIDEIS®

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.
- Anchor bolts available for bollards (ordered separately).
- DarkSky approved in 3000K or below.
- Rated for 100-mph wind load - custom poles available for higher wind loads upon request.
- Marine Grade Finish.

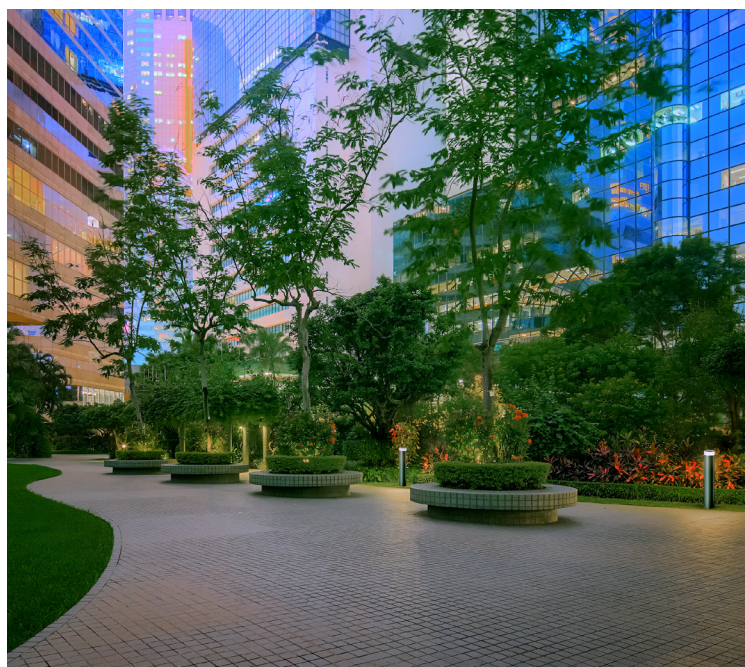

FINISHES

- **AN-96** / Iron gray / Textured
- **GR-94** / Aluminum metallic / Textured
- **WH-87** / White / Textured
- **BK-81** / Black / Textured
- **RB-10** / Iron rust / Textured

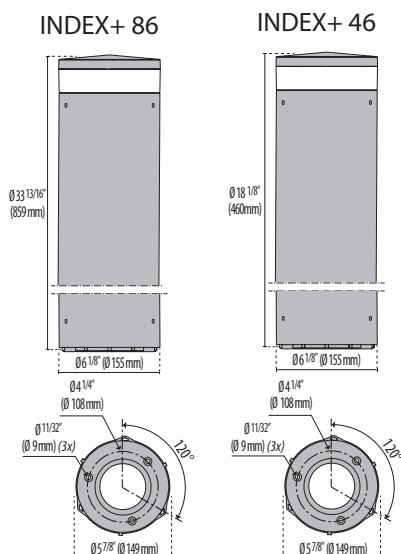

Lumen Output	2700K	3000K	3500K	4000K	5000K	5700K	6500K
INDEX+ 360° 18W (T5 STANDARD)	1961	2049	2036	2120	2120	2091	2063
INDEX+ 270° 13W	1471	1537	1547	1590	1590	1569	1574
INDEX+ 180° 9W	981	1025	1031	1060	1060	1046	1031
INDEX+ 90° 5W	490	512	516	530	530	523	516



Scan here for
installation
instructions

Order Guide - INDEX+

Order code example


INDEX+18-5W-27K-360-AM-UNV-010V-SB

Series	Bollard Height	Wattage	CCT	Distribution	Finish	Voltage	Dimming	Options/ Accessories
INDEX+ Index+	18 18 inch 33 33 inch XX Specify height min 12" max 96"	5W 5 watt 9W 9 watt 13W 13 watt 18W 18 watt max	80 CRI std. 27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K	360 360° (18W max standard) 270 270° (13W max) 180 180° (9W max) 90 90° (5W max) Base details on following page	AM Aluminum Metallic IG Iron Gray* IR Iron Rust BK Textured Black* WH Textured White CC Custom Color WG Wood Grain Finish (See below for details)	UNV 120-277V 120V 120V Only	010V 0-10V Dimming ELV 120V Line-Voltage Dimming Driver For more options Contact factory	SB Square base 07967 Base details on following page

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

BASE OPTIONS


DESCRIPTION	FINISH PART NUMBER
INDEX+	



15042096
Standard Base



14147496
(Optional Base)



07967
(Optional Square Base)




140409320
(AB&T Standard Base)



140409320
(AB&T Optional Base)




3115347
(AB&T Optional Square Base)

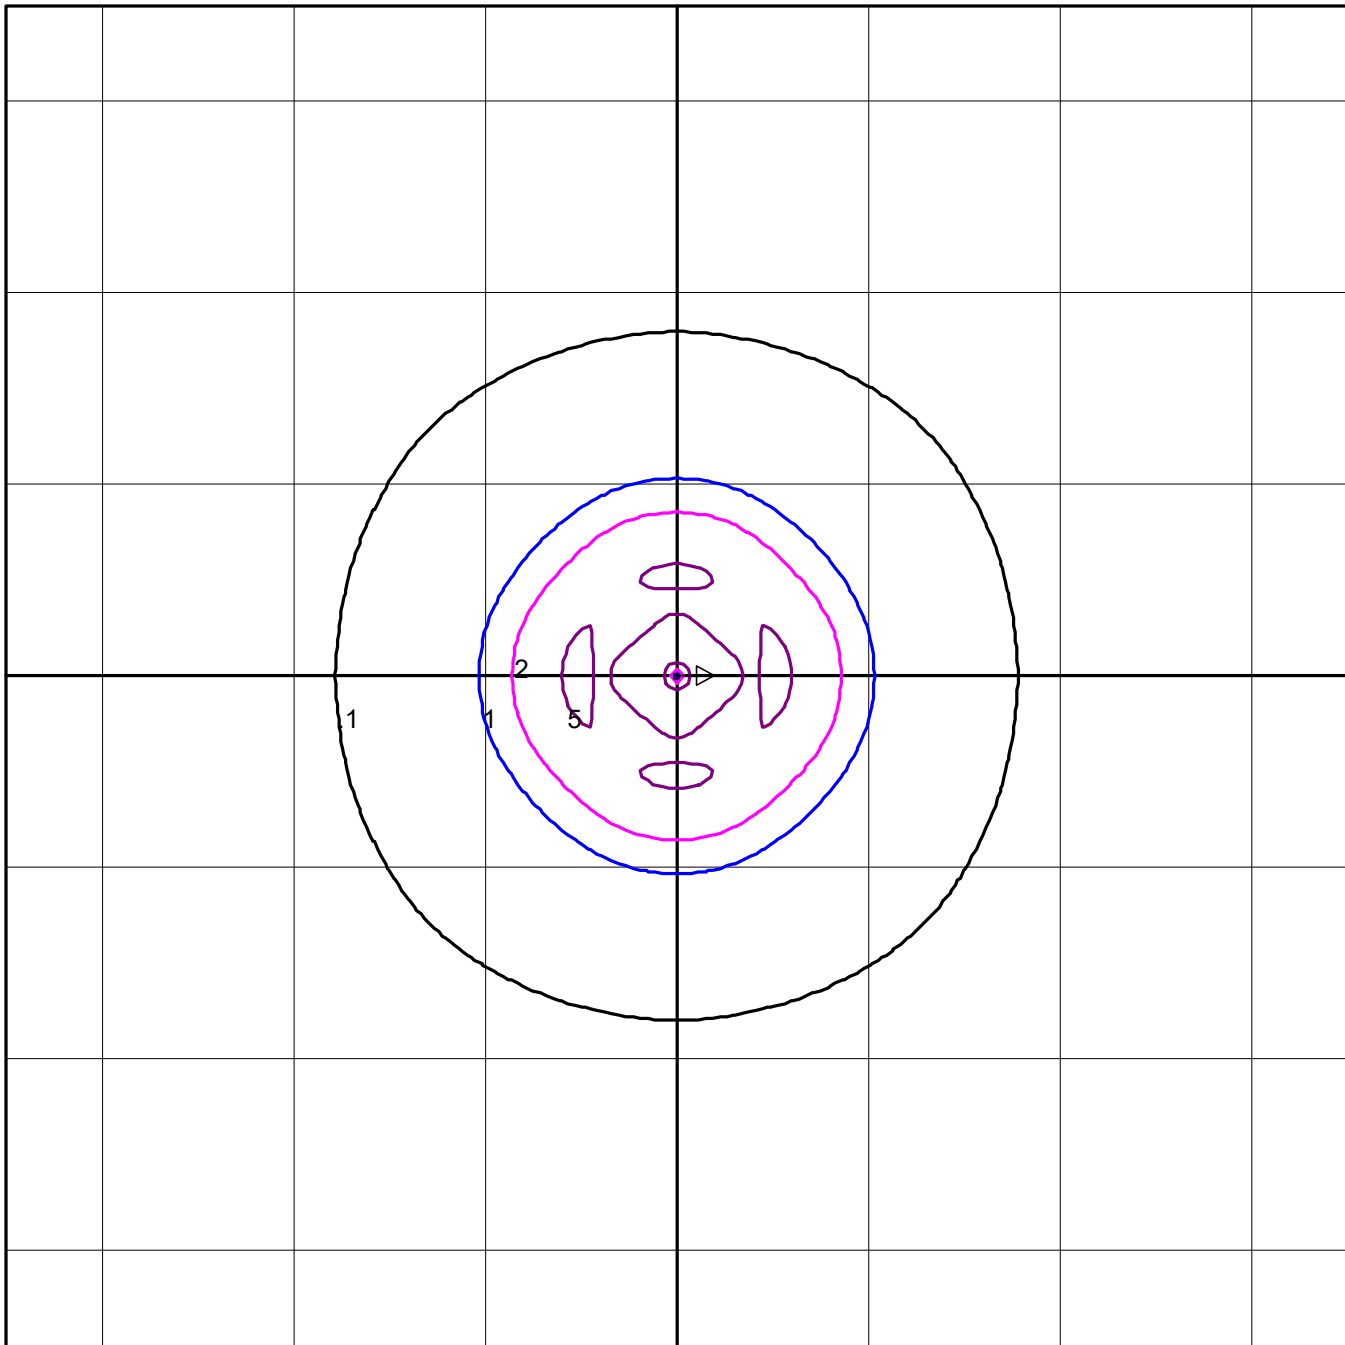

Performance iN Lighting
074151
INDEX+ 46 13W 830 C-EW 0-10V - Black LED

Horizontal Footcandles
Scale: 1 Inch = 10 Ft.
Light Loss Factor = 0.90
Lumens Per Lamp = 1547.08
Total Lamp Lumens = 1547.08 Mounting
Height = 1.50 Ft Maximum Calculated
Value = 7.56 Fc Arrangement: Single

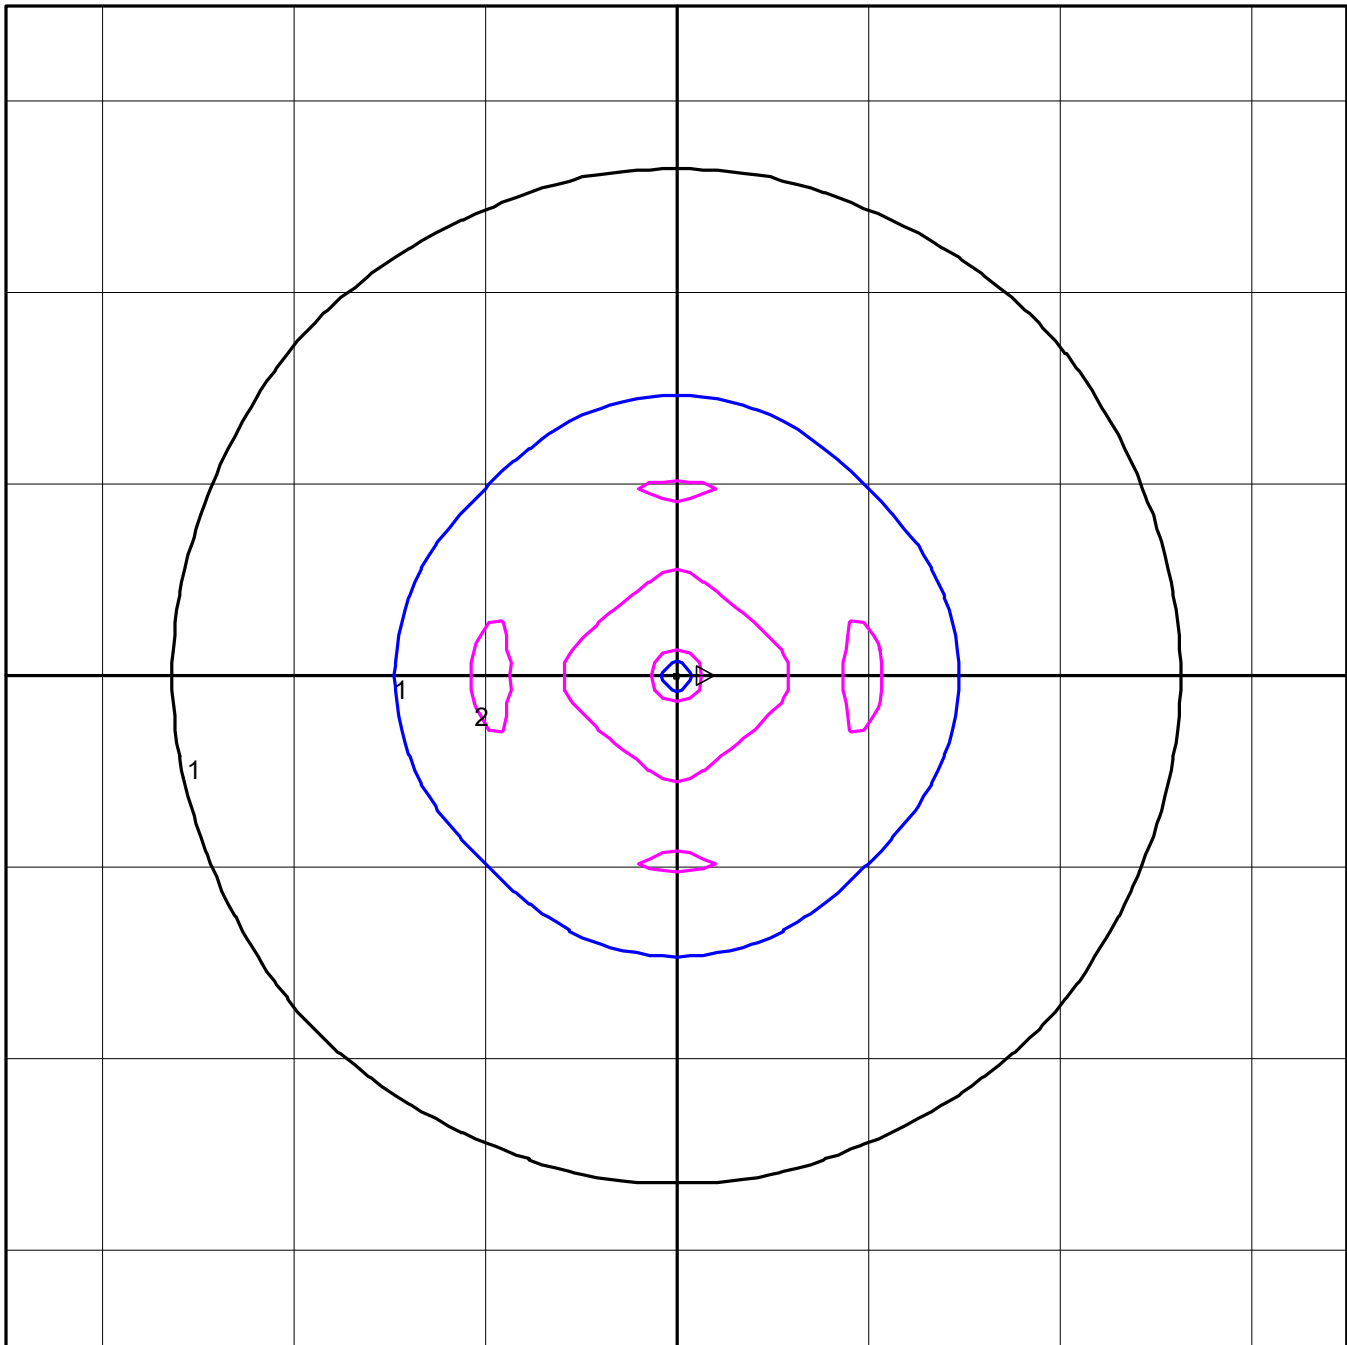

Performance iN Lighting
074167
INDEX+ 86 17W 830 C-EW 0-10V - Black LED


Horizontal Footcandles
Scale: 1 Inch = 10 Ft.
Light Loss Factor = 0.90
Lumens Per Lamp = 2048.57
Total Lamp Lumens = 2048.57 Mounting
Height = 2.80 Ft Maximum Calculated
Value = 2.87 Fc Arrangement: Single

We offer 13 different wood grain patterns that can be applied to most products either as an accent panel or the full fixture.


Custom graphics and logos are also available. Minimum quantities may apply.

Contact factory with any questions.
770-822-2115 or Sales.USA@PIL.Lighting

WGF01

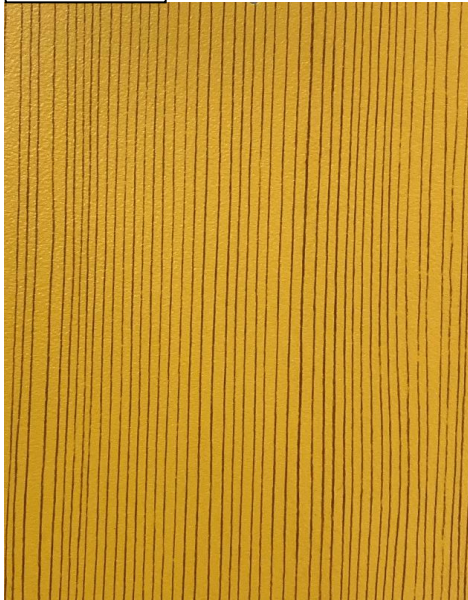

WGF02

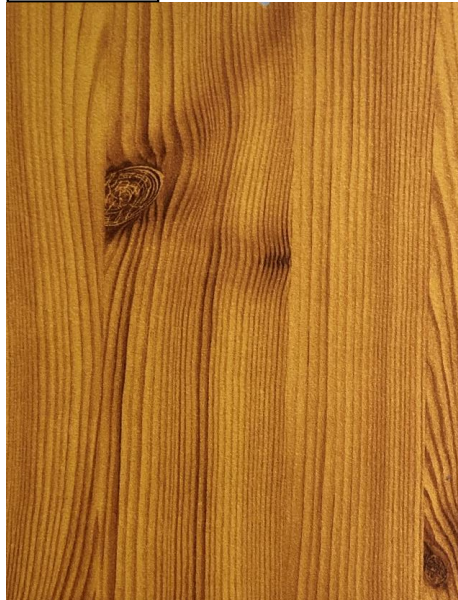

WGF03



WGF04




WGF05



WGF06



WGF07

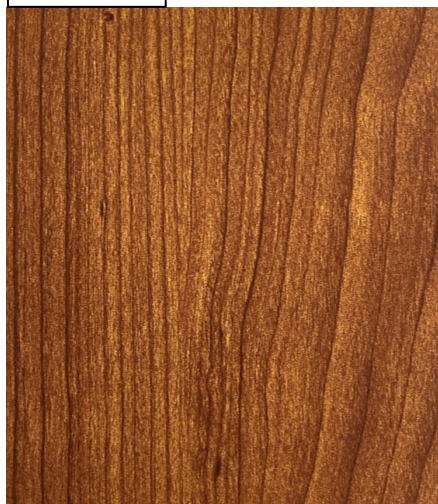

WGF08




WGF09




WGF10




WGF11

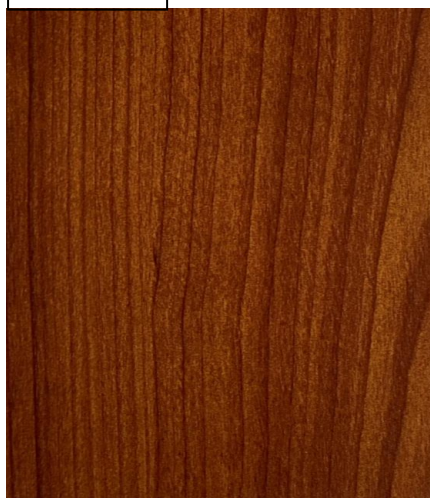

WGF12

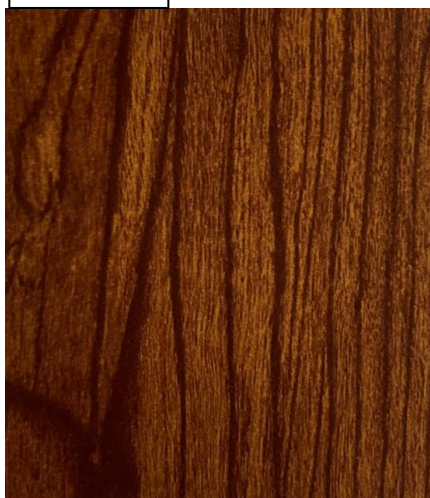

WGF13

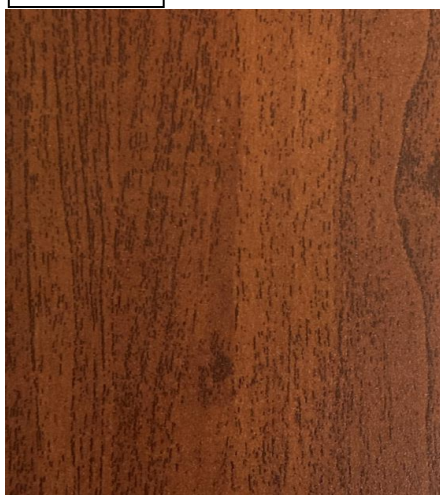

(CUSTOM)

