MIMIK 20 LINE BOLLARD

Performance Lighting



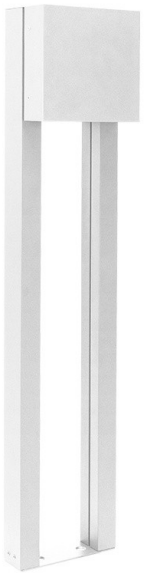

Ceiling-, wall- and post- mount series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (FLAT versions).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- High-transmittance transparent optics.
- Single (M) or dual (B) light emission.
- IESNA Type II light distribution (FLAT).
- IESNA Type II light distribution.
- IESNA Type III light distribution.
- IESNA Type IV light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Customizing facade faceplate available for MIMIK FLAT versions (ordered separately).
- Post accessory available for MIMIK 20 (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Optional clear plexiglass panel can be customized with logos for signage or wayfinding (LINE BOLLARD). Consult factory for more information.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.

IP 65 · WET · PRONTO · cULus LISTED · ADA · 0-10 V · 90° · RAL · IK 06 1 J

FINISHES

- **AN-96** / Iron gray / Textured
- **GR-94** / Aluminum metallic / Textured
- **WH-87** / White / Textured
- **BK-81** / Black / Textured
- **RB-10** / Iron rust / Textured

MIMIK 20 FLAT



MIMIK 20 Standard



LUMEN OUTPUT	Wattage	2700K	3000K	3500K	4000K	5000K
MIMIK 20 M T2	15W	1373	1385	1396	1408	1420
MIMIK 20 M T2	26W	2238	2256	2274	2292	2310
MIMIK 20 M T2 EMPK	15W	1373	1385	1396	1408	1420
MIMIK 20 M T3	15W	1385	1396	1407	1418	1429
MIMIK 20 M T3	26W	2255	2273	2291	2309	2327
MIMIK 20 M T3 EMPK	15W	1385	1396	1407	1418	1429
MIMIK 20 M T4	15W	1308	1318	1329	1340	1351
MIMIK 20 M T4	26W	2132	2149	2166	2183	2200
MIMIK 20 M T4 EMPK	15W	1308	1318	1329	1340	1351
MIMIK 20 FLAT M	14W	919	960	1001	1042	1083
MIMIK 20 FLAT B	25W	1847	1930	2012	2095	2178

Scan here for installation instructions

Performance in Lighting reserves the rights to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Rev. 08/28/2026

Bollard suitable for one or two fixtures

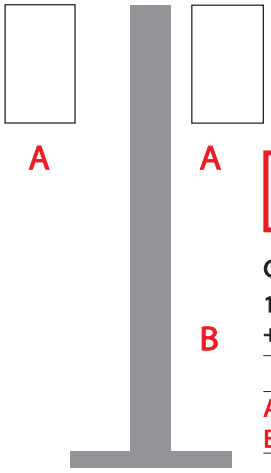

COMPLETE UNIT

1A+1B = 2 codes 2A
+1B = 3 codes

	COMPONENTS
A	luminaire
B	post



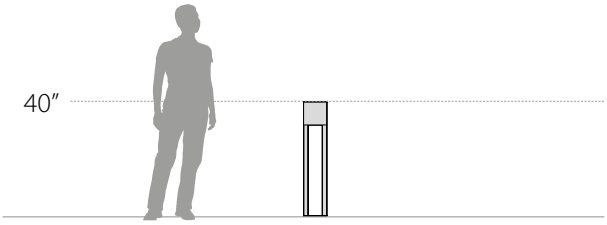

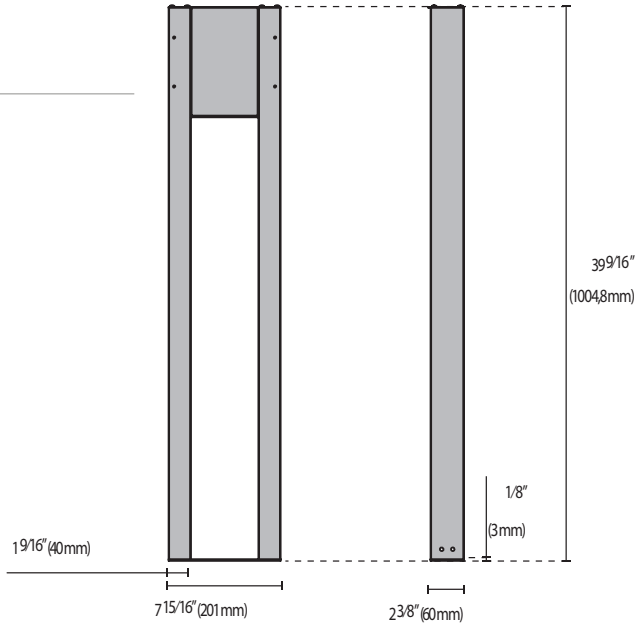



Performance in Lighting reserves the rights to make all necessary changes without prior notice.
Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Order Guide - MIMIK 20 STANDARD BOLLARD

Performance Lighting

Order code example **M20-M-15W-3K-T2-AM-UNV-010V-EMPK**

Series	Housing Style	Light Emission	Wattage	CCT	Distribution	Finish	Voltage	Dimming	Options/ Accessories
M20 MIMIK 20	**M20** Standard	**M** (One-Way)	**15W** 15 watt (with EMPK max) **26W** 26 watt Max **XX** Specify Wattage Must be below max	70 CRI std. **27K** 2700k **3K** 3000k **35K** 3500k **4K** 4000k **5K*** 5000K Consult factory for MOQ	**T2** Type II **T3** Type III **T4** Type IV	**AM** Aluminum Metallic **IG** Iron Gray **IR** Iron Rust **BK** Textured Black **WH** Textured White **CC** Custom Color	**UNV** 120-277V	**010V** 0-10V Dimming Driver **ELV** 120V Line-Voltage Dimming Driver For more options contact factory	**EMPK** Integral 15W emergency battery back up (not available with flat housing or with phc/occ) **CWEMPK** Remote cold weather emergency battery back up -20°C through 55°C **FC** Facade cover **FRST** Frosted glass **EGR** Egress double housing **PHC-B** Photocell button (not available with empk) **OCC** Occupancy sensor (not available with empk) **REM** Remote battery back up **BOL** 40" Bollard **LBOL** 40" Line Bollard **XXBOL** Specify Bollard Height 40" Max 12" Min **XXLBOL** Specify Line Bollard height 40" max 12" min **CON2** (double-gang j-box, adaptor plate and 1/2" knockouts) **CON4** (double-gang j-box, adaptor plate and 3/4" knockouts)

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

Performance in Lighting reserves the rights to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Rev. 08/28/2026

40" Bollard option

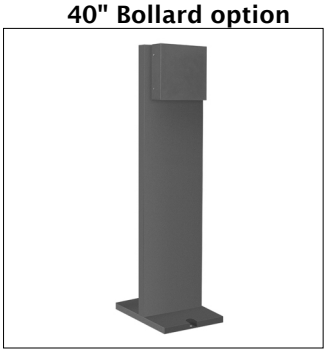

40" Line Bollard option

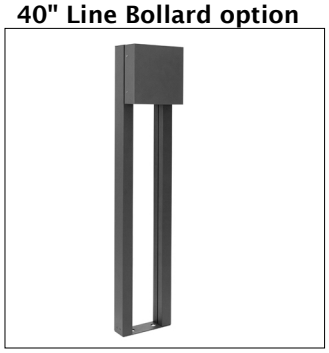

OCC



Facade Cover

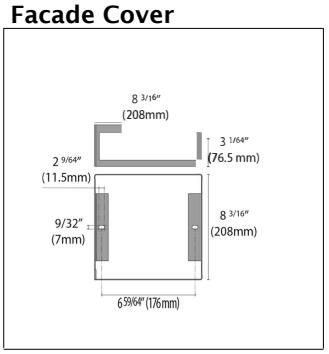

PHC-B



Egress Double Housing



Order Guide - MIMIK 20 FLAT BOLLARD

Performance Lighting

Order code example	**M20F-M-15W-3K-T2-AM-UNV-010V-CWEMPK**

Series	Housing Style	Light Emission	Wattage	CCT	Distribution	Finish	Voltage	Dimming	Options/ Accessories
M20 MIMIK 20	**M20F** Flat Flat housing is only suitable for T2 distrubution	**M** (One-Way) **B** (Two-Way)	**14W** 14 watt (M max) **25W** 25 watt (B max) **XX** Specify Wattage Must be below max	80 CRI std. **27K** 2700k **3K** 3000k **35K** 3500k **4K** 4000k **5K*** 5000K Consult factory for MOQ **RED** Satic Red **GRN** Static Green **BLU** Static Blue **AMB** Static Amber	**T2** Type II	**AM** Aluminum Metallic **IG** Iron Gray **IR** Iron Rust **BK** Textured Black **WH** Textured White **CC** Custom Color	**UNV** 120-277V	**010V** 0-10V Dimming Driver **ELV** 120V Line-Voltage Dimming Driver For more options contact factory	**CWEMPK** Remote cold weather emergency battery back up -20°C through 55°C **FC** Facade cover **FRST** Frosted glass **EGR** Egress double housing **PHC-B** Photocell button (not available with empk) **OCC** Occupancy sensor (not available with empk) **REM** Remote battery back up **BOL** 40" Bollard **LBOL** 40" Line Bollard **XXBOL** Specify Bollard Height 40" Max 12" Min **XXLBOL** Specify Line Bollard height 40" max 12" min **CON2** (double-gang j-box, adaptor plate and 1/2" knockouts) **CON4** (double-gang j-box, adaptor plate and 3/4" knockouts)

CONSULT FACTORY FOR OTHER AVAILABLE OPTIONS NOT SHOWN ABOVE

Performance in Lighting reserves the rights to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Rev. 08/28/2026

40" Bollard option



40" Line Bollard option



OCC



Facade Cover

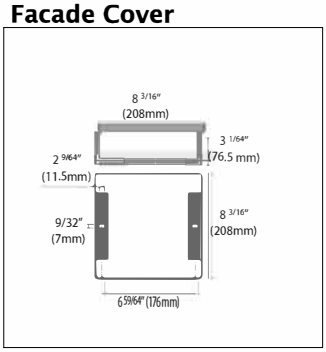

PHC-B



Egress Double Housing

