



Surface-mount doorway and hallway lights and post mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free die-cast aluminum housing, ring, and faceplates.
- Copper-free aluminum extruded post.
- High transmittance, internally coated, pressed glass diffuser, thermally, and chemically quenched to strengthen the impact resistance and reduce the effect of rapid temperature changes.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Tiltable LED board mounting bracket allows for quick and easy installation.
- 100% uniform diffused light emission.

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Five optional finishes available. Add finish suffix to any part number for textured Black (BK-81), Iron gray (AN-96), Aluminum metallic (GR-94), White (WH-87), Iron rust (RB-10) when not standard.
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom signage options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty on components.
- 10-year warranty on glass.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

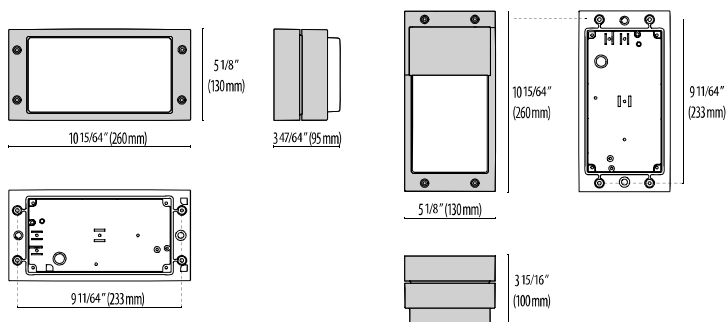

BLIZ

BLIZ
VISA/V

Lumen Output	2700K	3000K	3500K	4000K
BLIZ Open – 10W	486	498	509	520
BLIZ Open – 19.5W	972	995	1017	1040
BLIZ Guard – 10W	326	334	341	349
BLIZ Guard – 19.5W	652	667	682	698
BLIZ Visa – 10W	297	304	311	318
BLIZ Visa – 19.5W	593	607	621	635
BLIZ Visa V – 10W	320	327	335	342
BLIZ Visa V – 19.5W	639	654	669	684



Scan here
for installation
instructions

Order Guide – Bliz Bollard



Order code example: BZV-O-P20-19.5W-35K-BK-UNV-0-10V-TP

BZB-O-							
SERIES	Bollard Size	Wattage	CCT	Finish	Voltage	Controls	Accessories
BZB-O Bliz Bollard Open Trim	P20* 20 inch H 9 inch W	10W 10 watt (Min)	27K 2700 Kelvin	AM Aluminum Metallic*	UNV 120-277V*	NA Non-Dim*	SIGN Logo / Signage
BZB-G Bliz Bollard Grill Trim	P40* 40 inch H 6 inch W	19.5W 19.5 watt* (Max)	3K 3000 Kelvin*	IG Iron Gray*		0-10V 0-10V Dim Driver	TP Tamper Proof Hardware
BZB-V Bliz Bollard Visa Trim	*Standard bollard size, consult factory for further options	XX Specify wattage must be within range	35K 3500 Kelvin	IR Iron Rust		ELV 120V-Line Voltage dim Driver	BABAA Build America Buy America Act compliant
BZ-VV Bliz Bollard Open Trim			4K 4000 Kelvin*	BK Black		For more Options Contact Factory	
			AMB Static Amber 590 nm Turtle- Friendly	WH White			
			RED Static Red	CC Custom Color			
			BLU Static Blue				
			GRN Static Green				
			RGBW See Below for Details				

STANDARD OPTION, SHORTER LEAD TIME, NO MOQ
 TEMPLATE AND ANCHOR BOLTS INCLUDED WITH FIXTURE
 80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Revision 03
04/25

PERFORMANCE IN LIGHTING reserves the right to make all necessary changes without prior notice

PERFORMANCE IN LIGHTING USA, Inc.
 2621 Keys Pointe Conyers GA 30013 - United States
 Tel: 770 822 2115

info.usa@pil.lighting
 www.performanceinlighting.com/us

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP