

TYK+ 15



Long-lasting energy-efficient flood and accent light series for lighting landscapes, trees, columns, monuments, and architectural details.


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing, and adjustable stainless steel mounting bracket.
- Stainless steel graduated ferrules for aiming purposes on both sides of the fixture.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- NEMA 2H X 2V light distribution (C/I)
- NEMA 4H X 4V light distribution (C/M)

- NEMA 5H X 5V light distribution (C/IW)
- NEMA 5H X 5V light distribution (ELL).
- High-transmittance transparent optics.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Standard tear-proof nickelled brass cable gland M20x1.5 for cables Ø0,4" - Ø0,55"
- Consult factory for dimming options, marine-grade, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for additional optic options.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- Consult factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.



FINISHES

- AN-96 / Iron gray / Textured
- BK-81 / Black / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

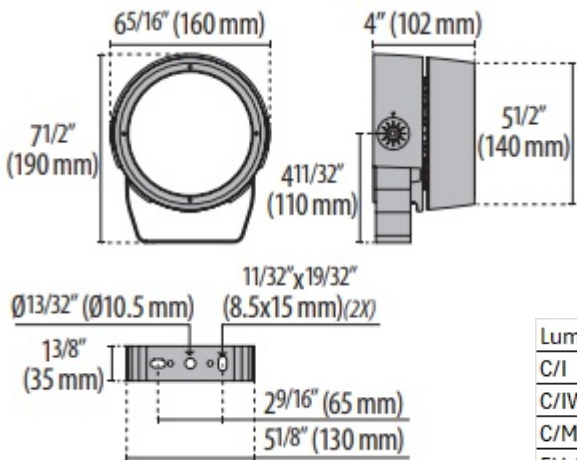

TYK+15

Lumen Output	27K	3K	4K
C/I	1370	1765	1890
C/IW	1515	1940	2085
C/M	1535	1975	2135
ELL 35X65	925	1205	1275
ELL 65X35	925	1205	1275



SCAN HERE FOR
INSTALLATION
INSTRUCTIONS

Order Guide - TYK+15



Order code example

TYK+15-C/I-20-AM-3K-UNV-NA-GS

Series	Optics	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
TYK+15	C/I 10° Beam	24 24 watt (max)	AM Aluminum Metallic	27K* 2700k	UNV 120-277V	NA Non Dimming	AGS Anti-Glare Snoot
	C/IW 65° Beam	XX Specify Wattage	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming Driver	ERB Extra rotation bracket
	C/M 34°	Must be below max	IR Iron Rust	35K 3500k		ELV 120V Line- Voltage Dimming Driver	JBOX Jbox cover Plate
	ELL1 35°x65°		BK Textured Black	4K 4000k			BD Barn door kit (NOT SUITABLE WITH SNOOT)
	ELL2 65°x 35°		WH Textured White	6K* 6000k		Consult factory for further options	2AB Two Axis Rotation bracket for gliding support
			CC Custom Color				GS Gliding support (3 9/16" poles)
							P8 8' Pole Ø 3.5"
							P10 10' Pole Ø 3.5"
							P12 12' Pole Ø 3.5"
							P14 14' Pole Ø 3.5"
							P16 16' Pole Ø 3.5"
							PXX Specify pole height
							XX'CABLE Specify length of factory installed cable 3' Standard
							GRNSPI Ground Spike
							HEX External Hex Louver (must be used with snoot)
							BABAA Build America Buy America Act compliant (not available with all options)

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

OPTIONAL ACCESSORIES

DESCRIPTION	FINISH	PART NUMBER
Optical accessories		
Anti-glare snoot	●	LTS1A3571
Kit barndoor	●	LTS1A3561
External Hex Louver	●	1394-15
Wall mount		
JBox cover plate - Iron gray	●	07959
Surface mount		
Extra rotation bracket +55°/-90°	●	LTS1A2533
Pole mount		
Two-axis rotation bracket for gliding support	●	3107473
Gliding support made of painted aluminium for the installation on Ø 3 9/16" / Ø 90 mm posts	●	14099696
Pole 8' Ø 3.5"	●	71408353
Pole 10' Ø 3.5"	●	71410353
Pole 12' Ø 3.5"	●	71412353
Pole 14' Ø 3.5"	●	71414353
Pole 16' Ø 3.5"	●	71416353
Ground mount		
Ground Spike		700191



LTS1A3571



LTS1A3561



07959




LTS1A2533




3107473



14099696

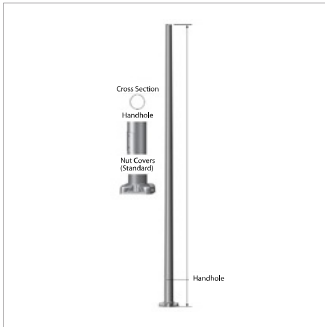

71408353
71410353
71412353
71414353
71416353

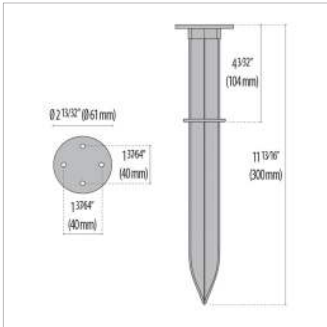

700191



1394-15
External hex-cell louver
(must be used with snoot)


OPTIONAL ACCESSORIES (ordered separately)

POLES FOR TYK+

When ordering, please specify quantity of fixture per pole as well as installation location (city & state)

Order code example: 714 20 35 3

Material	Height (ft)	Pole Diameter (in)	Custom Options (blank is standard)	Finish (additional characters may follow for factory information)
714 Aluminum*	08 8' tall	35 Ø3.5"	DBx Direct Burial** (x = depth below grade, measured in feet)	1 Aluminum Metallic
715 Steel*	10 10' tall			2 Black
716 Wood*	12 12' tall		GFCI integrated GFCI outlet**	3 Iron Gray
	14 14' tall		BA Banner Arms** (contact factory for details)	4 Iron Rust
	20 20' tall			5 White
	40 40' tall			6 Custom Color (specify RAL#)
	Custom heights available, contact factor for details. Some restrictions apply for wood poles..			W1 Wood - Caramel - smooth
			**some options not available with wood poles - contact factory for details..	W12 Wood - Vanilla - brushed
				For more, see below.

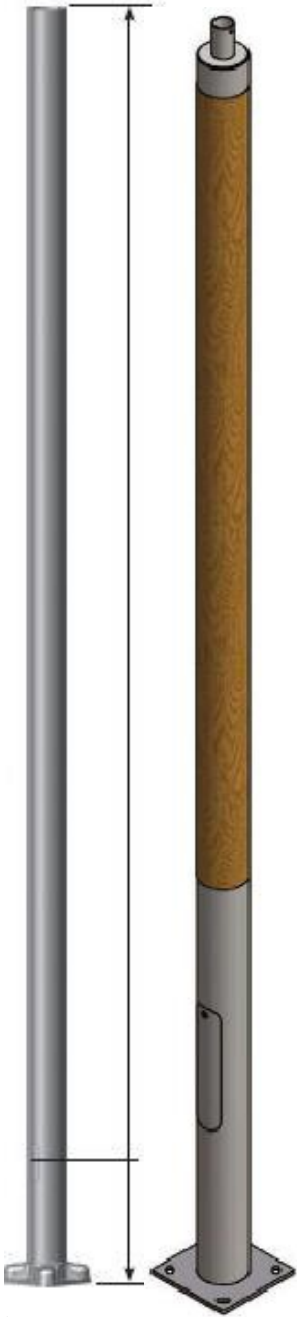

WOOD GRAIN FINISH OPTIONS:					
W1	CARAMEL	W11	W4	SAFFRON	W14
W2	VANILLA	W12	W5	NUTMEG	W15
W3	COCOA	W13	W6	SLATE	W16
			W7	CINNAMON	W17
			W8	TOPAZ	W18
			W9	ONYX	W19

Base cover shape and bolt circle diameter (BCD) will vary based on pole size and vendor. Contact factory for details related to your project.