



COMING SOON

Pathway bollard series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free (<1%) aluminum extruded post.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPBC utilized to maximize heat dissipation and promote long LED life.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details to build your light.

- Steel ground base plate included for bollards.
- Anchor bolts available for bollards (ordered separately).
- Suitable for most coastal applications.
- Contact factory for any Buy American Act (BAA) or Build America Buy America Act (BABAA) requirements.
- 5-year warranty.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

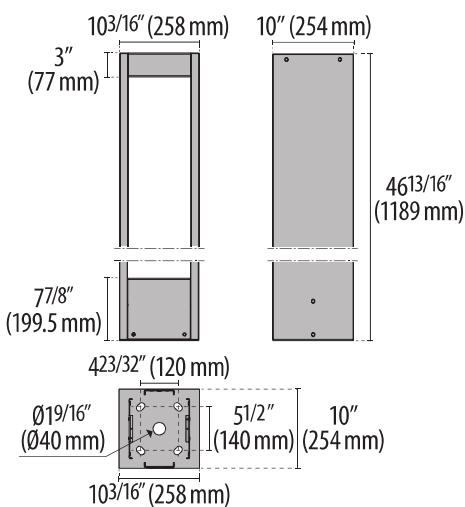

Scan here
for installation
instructions

Order code example

MCITY-21W-AM-3K-UNV-0-10V

MCITY

Wattage	Finish	Kelvin	Voltage	Controls	Accessories
18W 18 watt	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	BABAA Build America Buy America Act compliant (not available for all options)
21W 21 watt	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming Driver	
35W 35 watt (Amber max)	IR Iron Rust	35K 3500k		ELV 120V Line-Voltage Dimming Driver	
45W 45 watt (max)	BK Textured Black	4K 4000k			
XX Specify Wattage Must be below max	WH Textured White	5K 5000k			
	CC Custom Color	RED Static Red			
		GRN Static Green			
		BLU Static Blue			
		AMB Static Amber (590nm Turtle-Friendly)			

80 CRI STANDARD - OTHER OPTIONS AVAILABLE

Photometric Data

