

GUELL 1



Long-lasting energy-efficient architectural, landscape and professional flood light series. Fixtures consist of:


- Copper-free precision die-cast aluminum housing, and adjustable steel mounting bracket.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- NEMA 5H x 5V light distribution (C/IW)
- NEMA 7H x 5V light distribution (S/W).
- NEMA 6H x 5V light distribution (Type II).
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Pre-wired factory sealed cable for external electrical connection included. (5.5' standard)

- Standard quick release latch(es) allow for tool-free access.
- Standard robust 1/2" NPS knuckle mount with 180° adjustable swivel arm (SA versions) and rugged, locking teeth for a simplified installation.
- Louver, frosted glass, protective grid, wall support 19.69" / 39.37", single or double pole top support, and matching junction box plate accessories available (ordered separately).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
- Consult factory for custom pre-wired factory sealed cable length options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.



FINISHES

- GR-94 / Aluminum metallic / Textured
- RB-10 / Iron rust / Textured
- BK-81 / Black / Textured
- AN-96 / Iron gray / Textured
- WH-87 / White / Textured

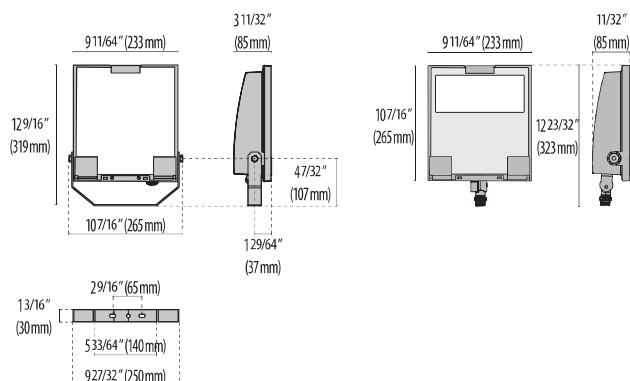

GUELL
1

GUELL
1 SA

Lumen Output	3K	4K
Guell 1 C/IW 45W	4165	4315
Guell 1 C/IW 45W	4989	5439
Guell 1 S/W 45W	4441	4591
Guell 1 S/W 55W	5569	5719
Guell 1 T2 45W	4274	4424
Guell 1 T2 55W	5434	5584

Scan here
for installation
instructions



Order Guide - Guell One



Order code example

GU1

GU1


Housing Style	Wattage	Optics	Finish	Kelvin	Voltage	Controls	Accessories
YO Yoke SA Swivel	45 45 watt 55 55 watt (max) XX Specify Wattage Must be below max	C/IW nema 5Hx5V S/W nema 7Hx5V A/W nema 6Hx5V	AM Aluminum Metallic IG Iron Gray IR Iron Rust BK Textured Black WH Textured White CC Custom Color	2K 2000k 27K 2700k 3K 3000k 35K 3500k 4K 4000k 5K 5000k 65K 6500k RED Static Red GRN Static Green BLU Static Blue RGBW* RGBW *See below for control details	UNV 120-277V	NA Non Dimming 0-10V 0-10V Dimming ELV ELV Dimming	GRID Protective Glass Grid Cover WS20" Wall support 20" WS40" Wall support 40" SPT Single Pole top adaptor DPT Double pole top adaptor Jbox Plate Jbox cover (Yoke Mount Only) PHC Button Style photocell FRST Frosted glass lens LVR Louver Asymmetrical Not suitable for C/IW LVR2 Louver Symmetrical Not suitable for C/IW OCC Hi/Lo Occupancy sensor PEN1 Single fixture pendant PEN2 Double fixture pendant CONSULT FACTORY for PENDANT DETAILS

OPTIONAL ACCESSORIES


DESCRIPTION
GUELL 1/S
Louvre GUELL 1 Symmetrical (NOT SUITABLE FOR C/IW)
GUELL 1/A
Louvre GUELL 1 Asymmetrical (NOT SUITABLE FOR C/IW)
GUELL 1
Soft glass GUELL 1
Protective grid GUELL 1
Wall support 500 mm/19.69" GUELL 1/2
Wall support 1000 mm/39.37" GUELL 1/2
Single pole top support GUELL 1
Double pole top support GUELL 1
Plate Cover JBox




14173020



14173120



14173294




14172902




14173394




14173494



14453194



14453294




07957 (Not suitable for Swivel Option)

GUELL PENDANTS*


GUELL 1 & GUELL 2 – Single fixture pendant*

- Each fixture has its own stem/pendant (length to be specified by the customer).
- A Ø5" canopy cover that matches the fixture is provided to cover the jbox.
- *NOTE: Single pendants may not hang perfectly straight due to the offset center of gravity.

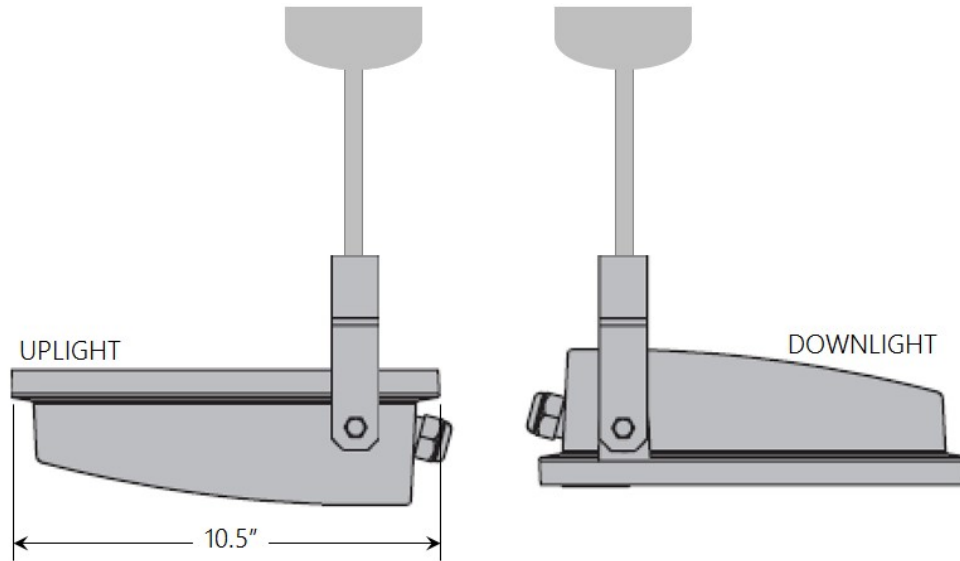

GUELL 1 & GUELL 2 – Double fixture pendant

- Each pair of fixtures has a stem/pendant (length to be specified by the customer).
- A Ø5" canopy cover that matches the fixture is provided to cover the jbox.

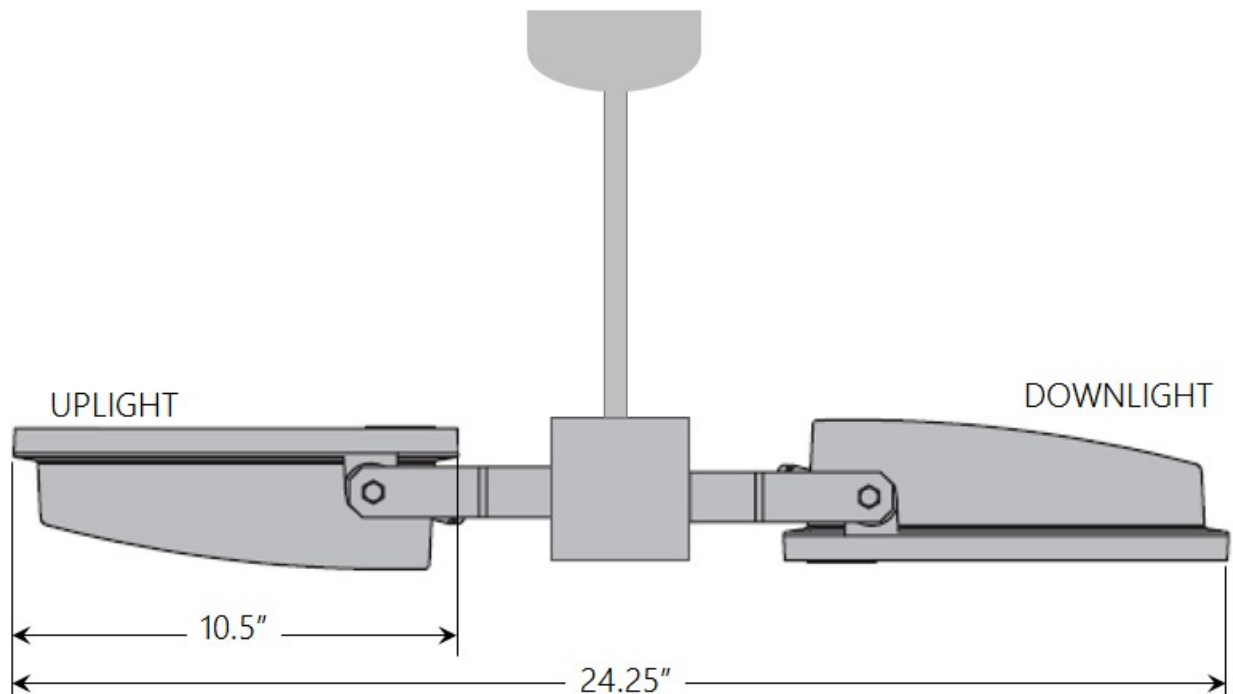

REMOTE RGBW ACCESSORIES

Power Supply



17433
Kit driver 48V



17096
Kit driver 48V WP

RF Controls



3104173
RGBW RF controller 4 channel
(0.35A each CH)



31041730
RGBW RF controller WP 4 channel
(0.35A each CH)



310429
RGBW hand held remote

DMX Controls



178973
RGBW DMX enabler/decoder 4
channel (0.35A each CH)



1789730
RGBW DMX enabler/decoder WP 4
channel (0.35A each CH)



11015
Terminating Resistor



110150
Terminating Resistor WP