


- Pathway bollard series. Fixtures consist of:
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
 - Copper-free precision die-cast aluminum housing and top cap.
 - Copper-free aluminum extruded post.
 - Frosted, flat, tempered silk-screened soda-lime glass diffuser.
 - Custom molded, anti-aging gasket(s).
 - Stainless steel external hardware.
 - High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
 - IESNA Type V light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
 - Pre-wired factory sealed cable for external electrical connection included.
 - Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options.
 - Consult factory for custom pre-wired factory sealed cable length options.
 - Consult factory for custom post height options.
 - Product meets Buy American Act requirements within ARRA.
 - 5-year warranty.
 - Marine Grade finish.
 - Suitable for Natatorium applications.



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured
- RB-10 / Iron rust / Textured

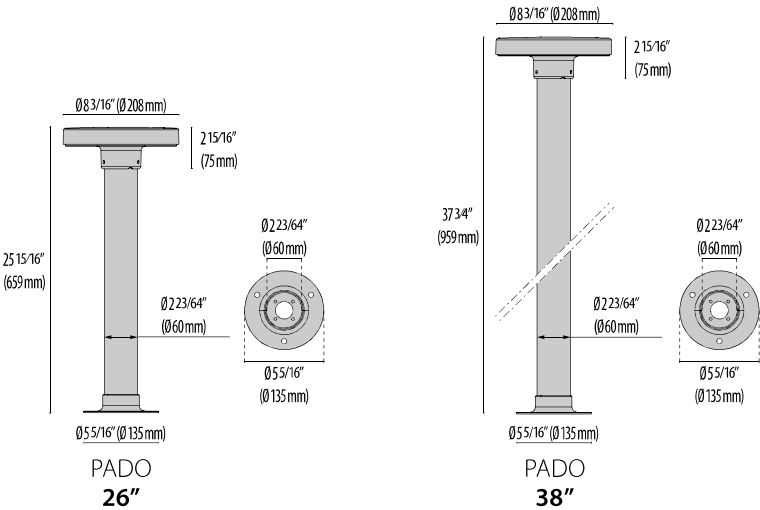

Scan here
for installation
instructions

Lumen Output	27K	3K	35K	4K	5K
Pado 26"	1040	1079	1118	1157	1196
Pado 38"	1040	1079	1118	1157	1196

Order Guide - Pado



Order code example


PADO-42-20-IR-4K-120-NA-GFCI

PADO-

Bollard Height	Wattage	Finish	Kelvin	Voltage	Controls	Accessories
26 26 inch*	8 8 watt	AM Aluminum Metallic*	22K 2200K	UNV 120-277V	NA Non Dimming	GFCI 20 amp outlet
38 38 inch*	20 20 watt*	IG Iron Gray*	27K 2700k		0-10V 0-10V Dimming*	WALL Wall Mounted Option
42 42 inch	(max)	IR Iron Rust*	3K 3000k*		ELV ELV Dimming	
		BK Textured Black*	35K 3500k			
		WH Textured White*	4K 4000k*			
		CC Custom Color	5K 5000k			
			65K 6500k			
			RED Static Red			
			BLU Static Blue			
			GRN Static Green			

* indicates product options with possible reduced lead times


GFCI



Fixture shown in Iron Gray with GFCI mounted at 18" above the mounting surface. Customer can specify a specific height if needed.

Wall

Mounted Option

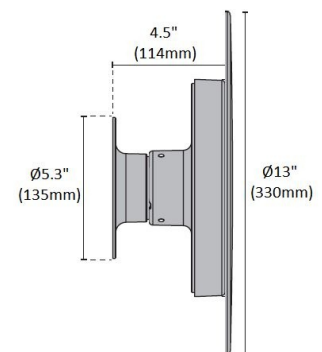

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 05
03/24