



QUASAR | WALL MOUNTED | CEILING SURFACE MOUNTED

PRODUCT CODE

PROJECT

TYPE

PERFORMANCE
iN LIGHTING

PERFORMANCE **in** LIGHTING

Light sculpts the surrounding area to emphasize the meticulous planning that has gone into every piece of architecture. Aesthetics and function combine to create products that will satisfy the needs of the most ambitious of projects. Lighting becomes an integral part of the creative and design process, shaping nuances by highlighting texture and detail, becoming part of the construction process by perfectly complementing its architectural design.

Urban environments, roads, infrastructure, sporting venues, to name just a few. These are complex areas that call for an integrated lighting approach, parking lots, squares, green areas, every space that makes up the urban environment requires the right level of lighting, for a safer environment. Smart buildings and a variety of engineered lighting options provide the best results.



All products are covered by a 5-year warranty, provided that they are used and maintained according to instructions. Consumable materials, such as bulbs, starters, electronic ignitors and reactors, which are compliant with warranty regulations issued by the European Directive on the subject, are not included in the warranty.

Focus on quality, safety and product lifetime/longevity are the essential objectives of PERFORMANCE **in** LIGHTING.

For additional information, go to www.performanceinlighting.com



PERFORMANCE **in** LIGHTING offers a wide range of quick ship fixtures through the Pronto Program and a host of options to fit within the unique budget of your next project.

INDEX

WALL MOUNTED



QUASAR 10
4



QUASAR 20
6



QUASAR 30
8



QUASAR 60
10

CEILING SURFACE MOUNTED



QUASAR30 CEILING
18

QUASAR 10



Wall effect series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Extra-clear, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Wall effects light emission.

- Input voltage: 120-277 V (50 / 60 Hz), integral driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Consult factory for custom beams options.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.




Standard finishes:

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

Other finish options:

- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

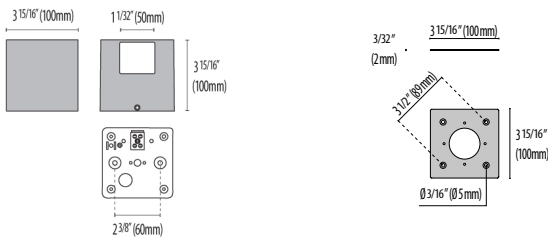


QUASAR
10



Please visit our web site
www.performanceinlighting.com
for the latest updated versions available.


QUASAR 10 1WB

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
High Power LEDs 120-277 V													
5 W	-	120-277 V	70	4000	-	-	470 lm	244 lm	80	10	60000 h	●	070352
5 W	-	120-277 V	70	3000	-	-	420 lm	220 lm	80	10	60000 h	●	070351
5 W	-	120-277 V	70	4000	-	-	470 lm	244 lm	80	10	60000 h	●	070354
5 W	-	120-277 V	70	3000	-	-	420 lm	220 lm	80	10	60000 h	●	070353
5 W	-	120-277 V	70	4000	-	-	470 lm	244 lm	80	10	60000 h	○	070350
5 W	-	120-277 V	70	3000	-	-	420 lm	220 lm	80	10	60000 h	○	070349
3.5 W	-	120-277 V	80	4000	-	-	269 lm	122 lm	80	10	60000 h	●	070183
3.5 W	-	120-277 V	80	3000	-	-	227 lm	100 lm	80	10	60000 h	●	070182
3.5 W	-	120-277 V	80	4000	-	-	269 lm	122 lm	80	10	60000 h	●	070185
3.5 W	-	120-277 V	80	3000	-	-	227 lm	100 lm	80	10	60000 h	●	070184
3.5 W	-	120-277 V	80	4000	-	-	269 lm	122 lm	80	10	60000 h	○	070181
3.5 W	-	120-277 V	80	3000	-	-	227 lm	100 lm	80	10	60000 h	○	070180




QUASAR 10 2WB

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
High Power LEDs 120-277 V													
10 W	-	120-277 V	70	4000	-	-	940 lm	476 lm	80	10	60000 h	●	070358
10 W	-	120-277 V	70	3000	-	-	840 lm	428 lm	80	10	60000 h	●	070357
10 W	-	120-277 V	70	4000	-	-	940 lm	476 lm	80	10	60000 h	●	070360
10 W	-	120-277 V	70	3000	-	-	840 lm	428 lm	80	10	60000 h	●	070359
10 W	-	120-277 V	70	4000	-	-	940 lm	476 lm	80	10	60000 h	○	070356
10 W	-	120-277 V	70	3000	-	-	840 lm	428 lm	80	10	60000 h	○	070355
5.5 W	-	120-277 V	80	4000	-	-	538 lm	235 lm	80	10	60000 h	●	070195
5.5 W	-	120-277 V	80	3000	-	-	454 lm	193 lm	80	10	60000 h	●	070194
5.5 W	-	120-277 V	80	4000	-	-	538 lm	235 lm	80	10	60000 h	●	070197
5.5 W	-	120-277 V	80	3000	-	-	454 lm	193 lm	80	10	60000 h	●	070196
5.5 W	-	120-277 V	80	4000	-	-	538 lm	235 lm	80	10	60000 h	○	070193
5.5 W	-	120-277 V	80	3000	-	-	454 lm	193 lm	80	10	60000 h	○	070192




QUASAR 10 1NB+1WB

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
High Power LEDs 120-277 V													
10 W	-	120-277 V	70	4000	-	-	940 lm	287 lm	80	10	60000 h	●	070364
10 W	-	120-277 V	70	3000	-	-	840 lm	258 lm	80	10	60000 h	●	070363
10 W	-	120-277 V	70	4000	-	-	940 lm	287 lm	80	10	60000 h	●	070366
10 W	-	120-277 V	70	3000	-	-	840 lm	258 lm	80	10	60000 h	●	070365
10 W	-	120-277 V	70	4000	-	-	940 lm	287 lm	80	10	60000 h	○	070362
10 W	-	120-277 V	70	3000	-	-	840 lm	258 lm	80	10	60000 h	○	070361
5.5 W	-	120-277 V	80	4000	-	-	538 lm	141 lm	80	10	60000 h	●	070189
5.5 W	-	120-277 V	80	3000	-	-	454 lm	113 lm	80	10	60000 h	●	070188
5.5 W	-	120-277 V	80	4000	-	-	538 lm	141 lm	80	10	60000 h	●	070191
5.5 W	-	120-277 V	80	3000	-	-	454 lm	113 lm	80	10	60000 h	●	070190
5.5 W	-	120-277 V	80	4000	-	-	538 lm	141 lm	80	10	60000 h	○	070187
5.5 W	-	120-277 V	80	3000	-	-	454 lm	113 lm	80	10	60000 h	○	070186



QUASAR 10 4WB

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
High Power LEDs 120-277 V													
10 W	-	120-277 V	80	4000	-	-	1076 lm	402 lm	80	10	60000 h	●	070201
10 W	-	120-277 V	80	3000	-	-	988 lm	329 lm	80	10	60000 h	●	070200
10 W	-	120-277 V	80	4000	-	-	1076 lm	402 lm	80	10	60000 h	●	070203
10 W	-	120-277 V	80	3000	-	-	988 lm	329 lm	80	10	60000 h	●	070202
10 W	-	120-277 V	80	4000	-	-	1076 lm	402 lm	80	10	60000 h	○	070199
10 W	-	120-277 V	80	3000	-	-	988 lm	329 lm	80	10	60000 h	○	070198



QUASAR 20



Wall sconce series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.

- Single (TECH) or dual (DOUBLETECH) light emission.
- IESNA Type I light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.




Standard finishes:

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

Other finish options:

- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

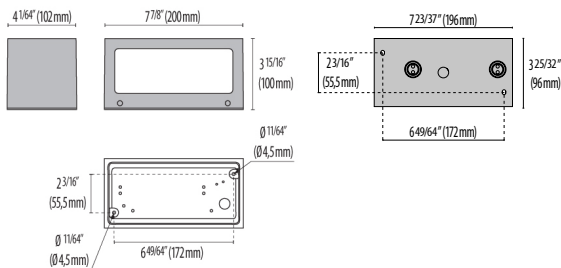


QUASAR
20



Please visit our web site
www.performanceinlighting.com
 for the latest updated versions available.


QUASAR 20 TECH

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
High Power LEDs 120-277 V - Dimmable 0-10 V													
11 W	-	120-277V	80	4000	Type I	-	1140 lm	764 lm	80	10	60000 h	●	070171
11 W	-	120-277V	80	3000	Type I	-	1000 lm	695 lm	80	10	60000 h	●	070170
11 W	-	120-277V	80	4000	Type I	-	1140 lm	764 lm	80	10	60000 h	●	070173
11 W	-	120-277V	80	3000	Type I	-	1000 lm	695 lm	80	10	60000 h	●	070172
11 W	-	120-277V	80	4000	Type I	-	1140 lm	764 lm	80	10	60000 h	○	070169
11 W	-	120-277V	80	3000	Type I	-	1000 lm	695 lm	80	10	60000 h	○	070168



QUASAR 20 DOUBLE TECH

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
High Power LEDs 120-277 V - Dimmable 0-10 V													
22 W	-	120-277V	80	4000	Type I	-	2280 lm	1332 lm	80	10	60000 h	●	070177
22 W	-	120-277V	80	3000	Type I	-	2000 lm	1211 lm	80	10	60000 h	●	070176
22 W	-	120-277V	80	4000	Type I	-	2280 lm	1332 lm	80	10	60000 h	●	070179
22 W	-	120-277V	80	3000	Type I	-	2000 lm	1211 lm	80	10	60000 h	●	070178
22 W	-	120-277V	80	4000	Type I	-	2280 lm	1332 lm	80	10	60000 h	○	070175
22 W	-	120-277V	80	3000	Type I	-	2000 lm	1211 lm	80	10	60000 h	○	070174



QUASAR 30



Wall sconce series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.

- Single (TECH) or dual (DOUBLETECH) light emission.
- IESNA Type I light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.




Standard finishes:

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

Other finish options:

- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

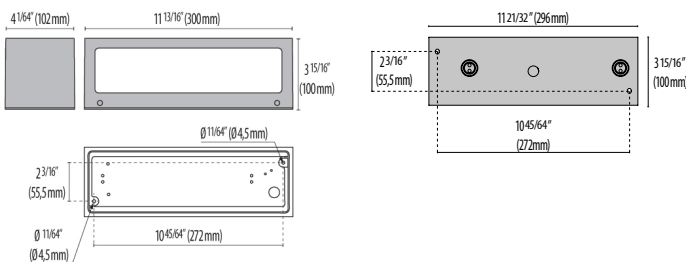

QUASAR
30



Please visit our web site
www.performanceinlighting.com
for the latest updated versions available.


QUASAR 30 TECH

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
High Power LEDs 120-277 V - Dimmable 0-10 V													
22 W	-	120-277 V	80	4000	Type I	-	2408 lm	1505 lm	80	10	60000 h	●	070207
22 W	-	120-277 V	80	3000	Type I	-	2300 lm	1350 lm	80	10	60000 h	●	070206
22 W	-	120-277 V	80	4000	Type I	-	2408 lm	1505 lm	80	10	60000 h	●	070209
22 W	-	120-277 V	80	3000	Type I	-	2300 lm	1350 lm	80	10	60000 h	●	070208
22 W	-	120-277 V	80	4000	Type I	-	2408 lm	1505 lm	80	10	60000 h	○	070205
22 W	-	120-277 V	80	3000	Type I	-	2300 lm	1350 lm	80	10	60000 h	○	070204



QUASAR 30 DOUBLE TECH

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
High Power LEDs 120-277 V - Dimmable 0-10 V													
35 W	-	120-277 V	80	4000	Type I	-	5539 lm	2251 lm	80	10	60000 h	●	070213
35 W	-	120-277 V	80	3000	Type I	-	5291 lm	2046 lm	80	10	60000 h	●	070212
35 W	-	120-277 V	80	4000	Type I	-	5539 lm	2251 lm	80	10	60000 h	●	070215
35 W	-	120-277 V	80	3000	Type I	-	5291 lm	2046 lm	80	10	60000 h	●	070214
35 W	-	120-277 V	80	4000	Type I	-	5539 lm	2251 lm	80	10	60000 h	○	070211
35 W	-	120-277 V	80	3000	Type I	-	5291 lm	2046 lm	80	10	60000 h	○	070210



QUASAR 60



Wall sconce series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned, flat, tempered silk-screened soda-lime glass diffuser (TECH versions).
- Frosted, flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.
- Custom MCPCB utilized to maximize heat dissipation and promote a long LED life.
- Single (M) or dual (B) light emission.
- IESNA Type II light distribution.
- Single (TECH) or dual (DOUBLE TECH) light emission.
- IESNA Type III light distribution.
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Optional, integral, emergency battery-pack designed for a minimum operation of 90 minutes (EMPK versions).
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.




Standard finishes:

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

Other finish options:

- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

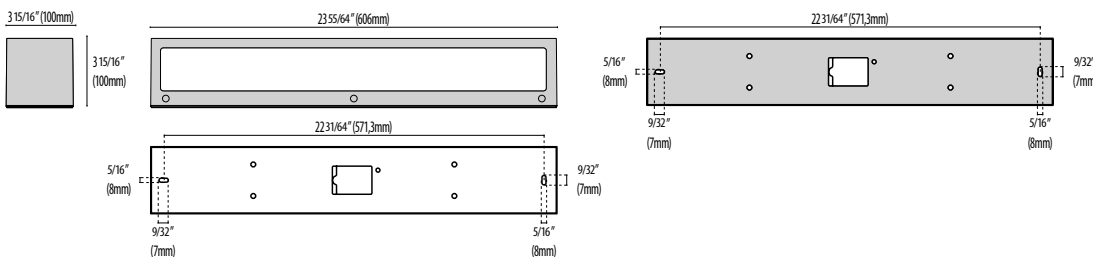

QUASAR
60



Please visit our web site
www.performanceinlighting.com
for the latest updated versions available.

QUASAR 60 M

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
19 W	-		80	4000	-	-	2736 lm	1655 lm	80	10	130000 h	●	070395
19 W	-		80	3000	-	-	2554 lm	1631 lm	80	10	130000 h	●	070394
19 W	-		80	4000	-	-	2736 lm	1655 lm	80	10	130000 h	●	070397
19 W	-		80	3000	-	-	2554 lm	1631 lm	80	10	130000 h	●	070396
19 W	-		80	4000	-	-	2736 lm	1655 lm	80	10	130000 h	○	070399
19 W	-		80	3000	-	-	2554 lm	1631 lm	80	10	130000 h	○	070398




QUASAR 60 M EMPK

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
19 W	-	120-277 V	80	4000	-	-	2736 lm	1655 lm	80	10	130000 h	●	070401
19 W	-	120-277 V	80	3000	-	-	2554 lm	1631 lm	80	10	130000 h	●	070400
19 W	-	120-277 V	80	4000	-	-	2736 lm	1655 lm	80	10	130000 h	●	070403
19 W	-	120-277 V	80	3000	-	-	2554 lm	1631 lm	80	10	130000 h	●	070402
19 W	-	120-277 V	80	4000	-	-	2736 lm	1655 lm	80	10	130000 h	○	070405
19 W	-	120-277 V	80	3000	-	-	2554 lm	1631 lm	80	10	130000 h	○	070404



QUASAR 60 TECH

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
19 W	-	120-277 V	80	4000	-	-	2736 lm	2078 lm	80	10	130000 h	●	070413
19 W	-	120-277 V	80	3000	-	-	2554 lm	2050 lm	80	10	130000 h	●	070412
19 W	-	120-277 V	80	4000	-	-	2736 lm	2078 lm	80	10	130000 h	●	070415
19 W	-	120-277 V	80	3000	-	-	2554 lm	2050 lm	80	10	130000 h	●	070414
19 W	-	120-277 V	80	4000	-	-	2736 lm	2078 lm	80	10	130000 h	○	070417
19 W	-	120-277 V	80	3000	-	-	2554 lm	2050 lm	80	10	130000 h	○	070416




QUASAR 60 TECH EMPK

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
19 W	-	120-277 V	80	4000	-	-	2736 lm	2078 lm	80	10	130000 h	●	070419
19 W	-	120-277 V	80	3000	-	-	2554 lm	2050 lm	80	10	130000 h	●	070418
19 W	-	120-277 V	80	4000	-	-	2736 lm	2078 lm	80	10	130000 h	●	070421
19 W	-	120-277 V	80	3000	-	-	2554 lm	2050 lm	80	10	130000 h	●	070420
19 W	-	120-277 V	80	4000	-	-	2736 lm	2078 lm	80	10	130000 h	○	070423
19 W	-	120-277 V	80	3000	-	-	2554 lm	2050 lm	80	10	130000 h	○	070422




QUASAR 60 B

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
38 W	-		80	4000	-	-	5472 lm	3250 lm	80	10	130000 h	●	070407
38 W	-		80	3000	-	-	5107 lm	3204 lm	80	10	130000 h	●	070406
38 W	-		80	4000	-	-	5472 lm	3250 lm	80	10	130000 h	●	070409
38 W	-		80	3000	-	-	5107 lm	3204 lm	80	10	130000 h	●	070408
38 W	-		80	4000	-	-	5472 lm	3250 lm	80	10	130000 h	○	070411
38 W	-		80	3000	-	-	5107 lm	3204 lm	80	10	130000 h	○	070410



QUASAR 60 DOUBLE TECH

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
38 W	-	120-277 V	80	4000	-	-	5472 lm	4082 lm	80	10	130000 h	●	070425
38 W	-	120-277 V	80	3000	-	-	5107 lm	4026 lm	80	10	130000 h	●	070424
38 W	-	120-277 V	80	4000	-	-	5472 lm	4082 lm	80	10	130000 h	●	070427
38 W	-	120-277 V	80	3000	-	-	5107 lm	4026 lm	80	10	130000 h	●	070426
38 W	-	120-277 V	80	4000	-	-	5472 lm	4082 lm	80	10	130000 h	○	070429
38 W	-	120-277 V	80	3000	-	-	5107 lm	4026 lm	80	10	130000 h	○	070428



QUASAR 30 CEILING



Ceiling mount series. Fixtures consist of:

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.

- 90° x 95° beam angle (TECH)
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.




Standard finishes:

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured

Other finish options:

- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured



QUASAR
30 CEILING



Please visit our web site
www.performanceinlighting.com
for the latest updated versions available.

QUASAR 30 CEILING TECH

WATTAGE	DLC	VOLTAGE	CRI	KELVIN	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	FINISH	PART NUMBER
Mid Power LEDs 120-277 V - Dimmable 0-10 V													
21 W	-	120-277 V	80	4000	-	-	2384 lm	1889 lm	80	10	100000 h	●	070609
21 W	-	120-277 V	80	3000	-	-	2276 lm	1756 lm	80	10	100000 h	●	070606
21 W	-	120-277 V	80	4000	-	-	2384 lm	1889 lm	80	10	100000 h	●	070610
21 W	-	120-277 V	80	3000	-	-	2276 lm	1756 lm	80	10	100000 h	●	070607
21 W	-	120-277 V	80	4000	-	-	2384 lm	1889 lm	80	10	100000 h	○	070611
21 W	-	120-277 V	80	3000	-	-	2276 lm	1756 lm	80	10	100000 h	○	070608





PERFORMANCE IN LIGHTING

2621 Keys Pointe

Conyers, GA 30013 - United States

Ph 770.822.2115

Fax 770.822.9925

www.performanceinlighting.com