



SYSTEMLINE+ | AREA LIGHTING | WALL MOUNTED

PRODUCT CODE

PROJECT

TYPE

PERFORMANCE
in LIGHTING

powered by
GEWISS



Company

Performance in Lighting USA, located in Conyers, GA, is part of an international group of companies headquartered in Verona, Italy.

The group was formed from a number of well-established technical lighting companies from various countries. Performance in Lighting has a wide sales and distribution network operating in over 100 countries worldwide. Production facilities are located in Verona Italy, Bergamo Italy, Goslar Germany, Brussels Belgium, Conyers GA USA. Sales/distribution subsidiaries are located in England, Holland, France, Finland, Spain, Portugal, Australia, Dubai and Japan.

Recognized for its unique professional approach and technical know-how, Performance in Lighting has combined its international experience and technical expertise to become a worldwide leader in its industry. The group offers various lighting solutions worldwide for many applications including interior, exterior, residential, commercial, and sports lighting providing options to satisfy both architectural and engineering requirements.

Performance in Lighting USA concentrates on specification grade luminaires designed to provide a vast array of lighting solutions. Our concentration is outdoor products for illuminating commercial spaces from structural facades to parking areas. We strive to meet the demands of today's lighting community offering made in USA products, European designed with clean, contemporary aesthetics along with aggressive price points and fast lead times.

Pronto Program


PERFORMANCE IN LIGHTING offers a wide range of quick ship fixtures through the Pronto Program and a host of options to fit within the unique budget of your next project.





Overview

Click the QR-code for latest information.

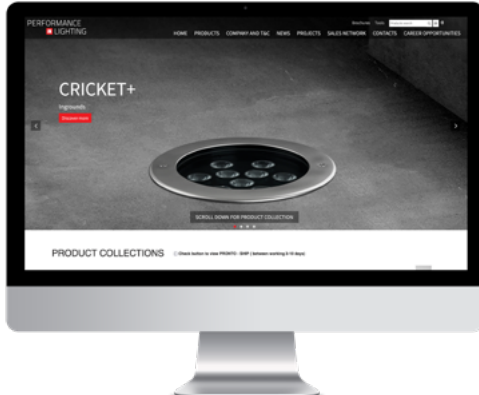

Website

Please visit our web site www.performanceinlighting.com/us/us/ for the latest updated versions available.



5-year warranty

All products are covered by a 5-year warranty, provided that they are used and maintained according to instructions. Focus on quality, safety and product lifetime/longevity are the essential objectives of PERFORMANCE IN LIGHTING. For additional information, email info.usa@pil.lighting

SYSTEMLINE+

Modular is putting it mildly

Yes, we've regenerated the SystemPark Line due to overwhelming specifications and upgraded into SYSTEMLINE+ to perform even better. This product family is extremely versatile, offering a wide range of lighting solutions. Ideal for signage using banner arms. Available in three different lengths, the slim profile offers a clean, minimalist profile. The distinct designed slip fitters allow the fixtures to be installed using different combinations of heights and angles.

The extremely versatile and diverse system of accessories provided for this product family offers a wide range of lighting solutions for pedestrian areas, city streets, parking lots and urban areas. This modern lighting solution contains an added value for urban centers, for the architecture and for the economy. The aesthetics and functionality, economic saving and safeguard of sources, allow sustainable lighting that make areas more alluring and liveable without waste or light pollution.





Stone Italiana headquarters | Verona | Italy

SYSTEMLINE+

Area and site lighting series. Fixtures consist of:

CONSTRUCTION

- Copper-free aluminum die-cast end-caps, extruded, and anodized housing.
- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- High-transmittance transparent optics.
- Extra-clear, tempered, silk-screened, flat glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.

INSTALLATION

- Overall standard size of H3.5" x D3.4". Available in three standard lengths of 41", 53" and 65".
- Range of accessories, including posts and painted aluminum arms, suitable for a variety of configurations for diverse settings (parks, gardens, pedestrian areas, squares, parking areas, etc.) available (ordered separately).

OPTICS

- Type I, Type II, and Asymmetrical Wide (A/W) - Type II for 53" and 65" and Type III for 41" versions - light distributions.

ELECTRICAL

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Integral surge protector can withstand up to 10 kV transient line surge.

OPTIONS

- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details.

LISTINGS

- UL Wet location listed. IP66 rated.
- Product meets Buy American requirements within ARRA.
- Photometric data measured according to UNI EN 13032-1/4 and IES LM-79-08
- The light distribution complies with the IESNA Full Cut-Off Classification and is eligible for all "Dark Sky" applications when aimed down.
- Actual performance may differ as a result of the end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications are subject to change without notice.

WARRANTY

- 5-year limited warranty. Complete warranty terms located at www.performanceinlighting.com



SYSTEMLINE+




Designed to allow maximum flexibility thanks to the combination of few basic elements allow SQUARE+ and SYSTEMLINE+ to be mounted in combination on the same post.



Specially designed slip fitters allow different combinations of height and angle on post up to four different configurations at one level.




SYSTEMLINE+ is available in three different lengths, slim in profile to provide a clean, minimal visual impact.

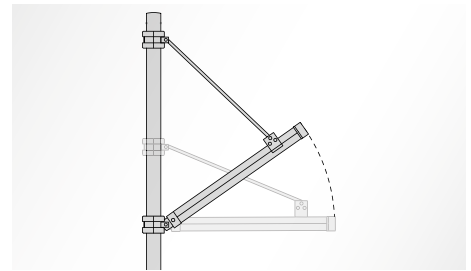




SYSTEMLINE+ can be tilted at various angles after installation by simply changing the location of the top collar.




SYSTEMLINE+ can also be wall mounted.

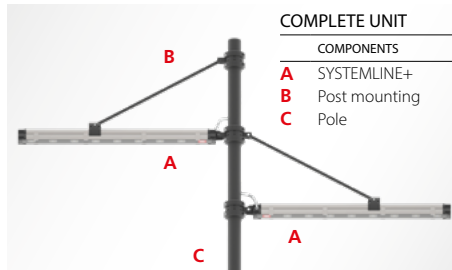


For products that must be mounted on a post, bracket, track or recessed into the wall, it is often necessary to order several different parts (codes) to get the complete configuration.

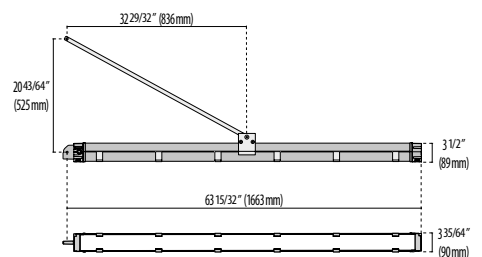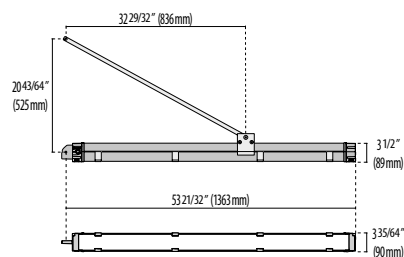


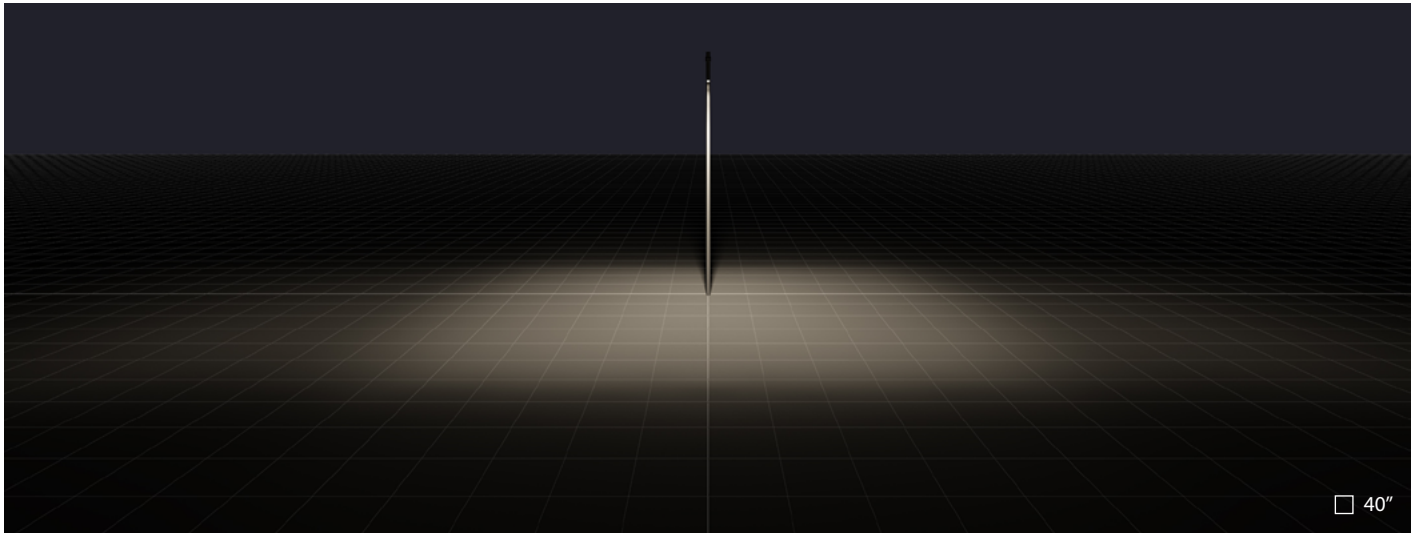

SYSTEMLINE+ | IESNA Type distribution | TYPE I

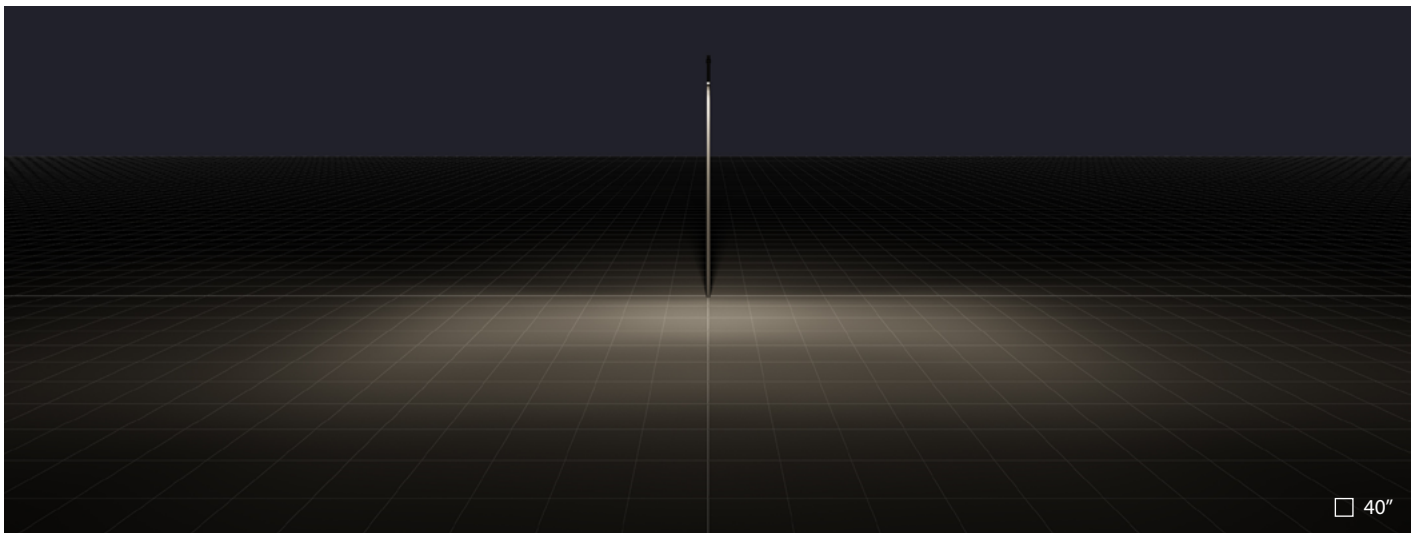


SYSTEMLINE+ | IESNA Type distribution | TYPE II

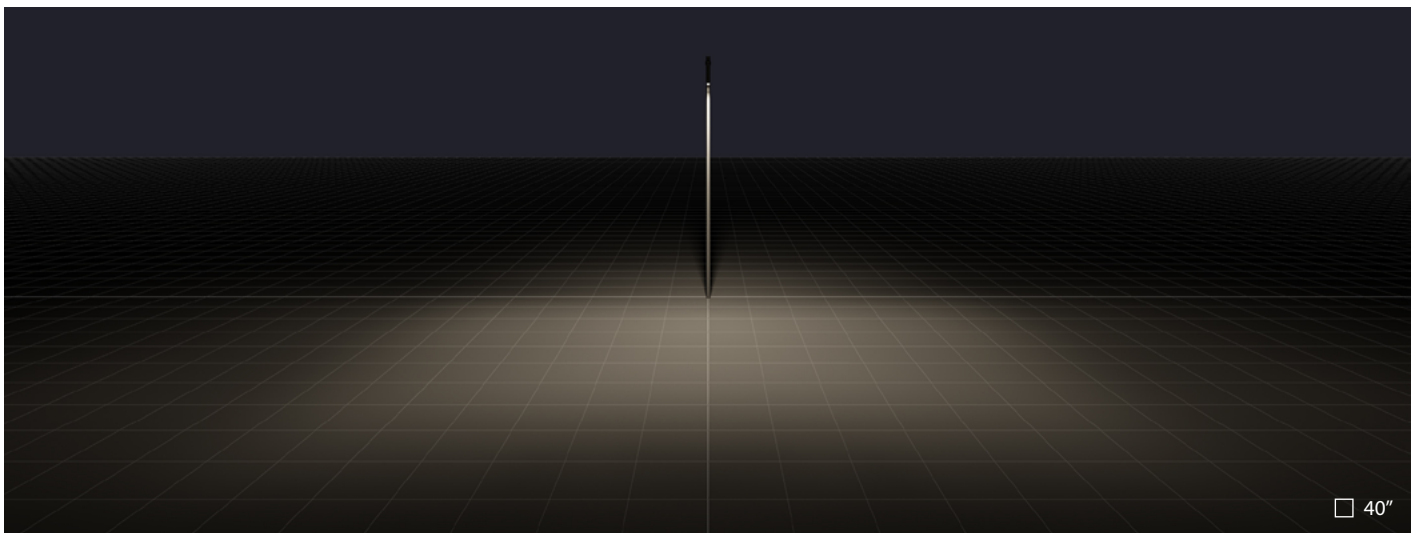

SYSTEMLINE+ | A/W Asymmetric Wide optics | TYPE II




40"

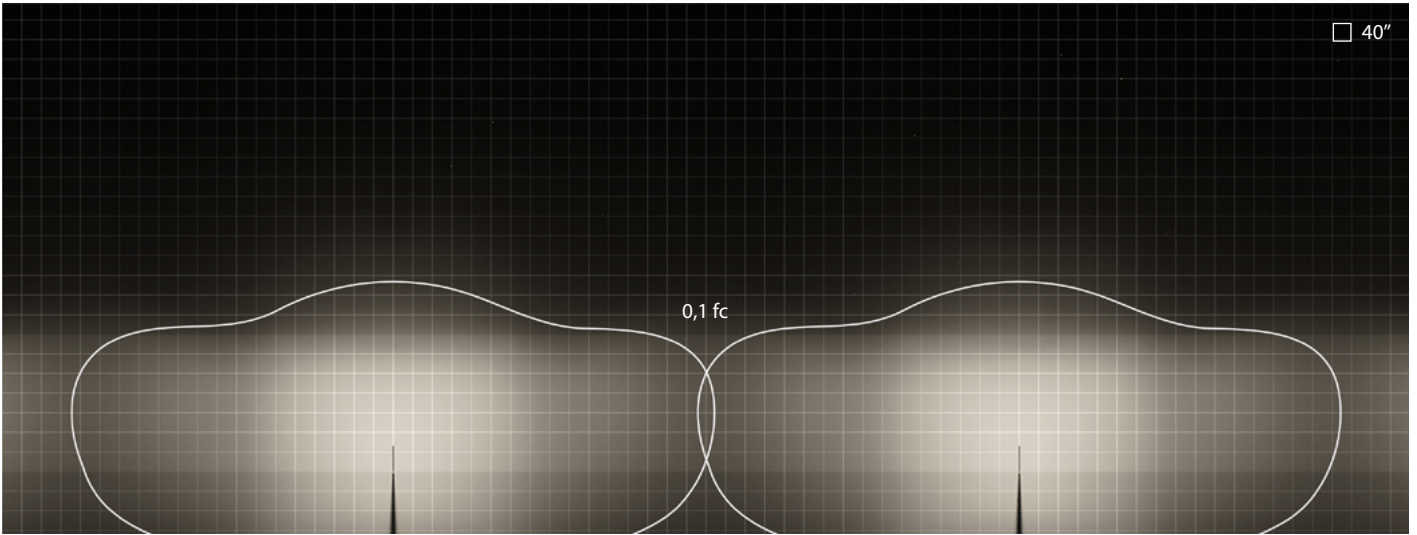

SYSTEMLINE+ | A/W Asymmetric Wide optics | TYPE II | linear

Luminaire spacing = 101'8" (31m)
 Path depth = 32'10" (10m)
 Mounting height = 18'1" (5.5m)


40"

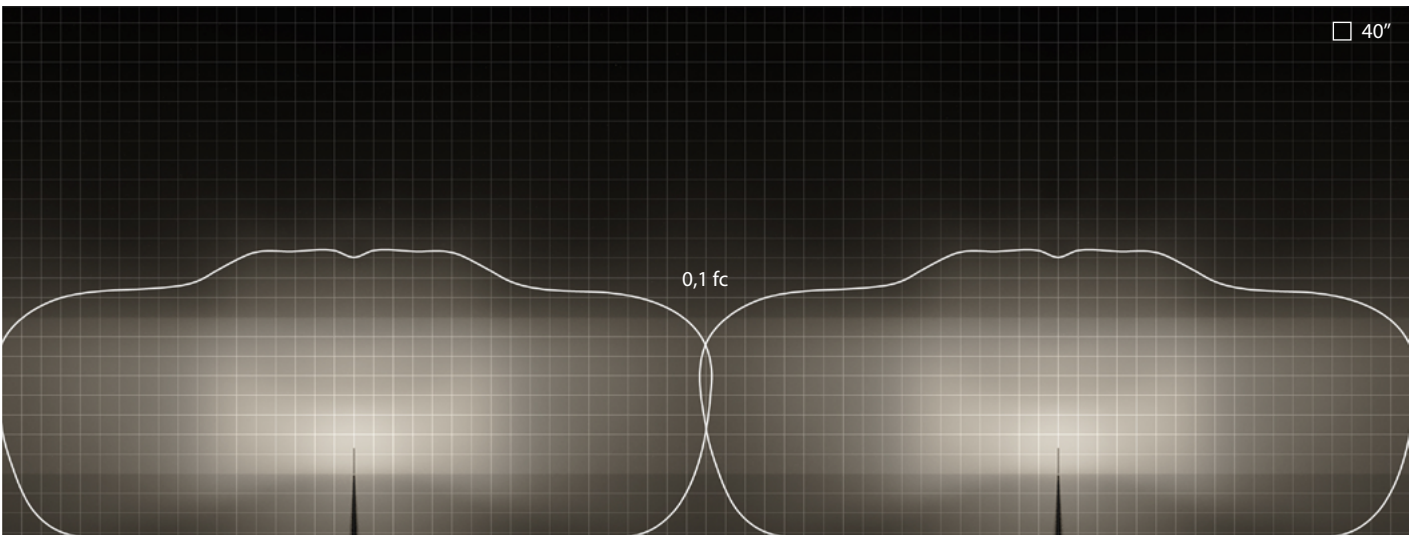

SYSTEMLINE+ | IESNA Type distribution | TYPE I | linear

Luminaire spacing = 105'0" (32m)
 Path depth = 23'0" (7m)
 Mounting height = 18'1" (5.5m)

40"

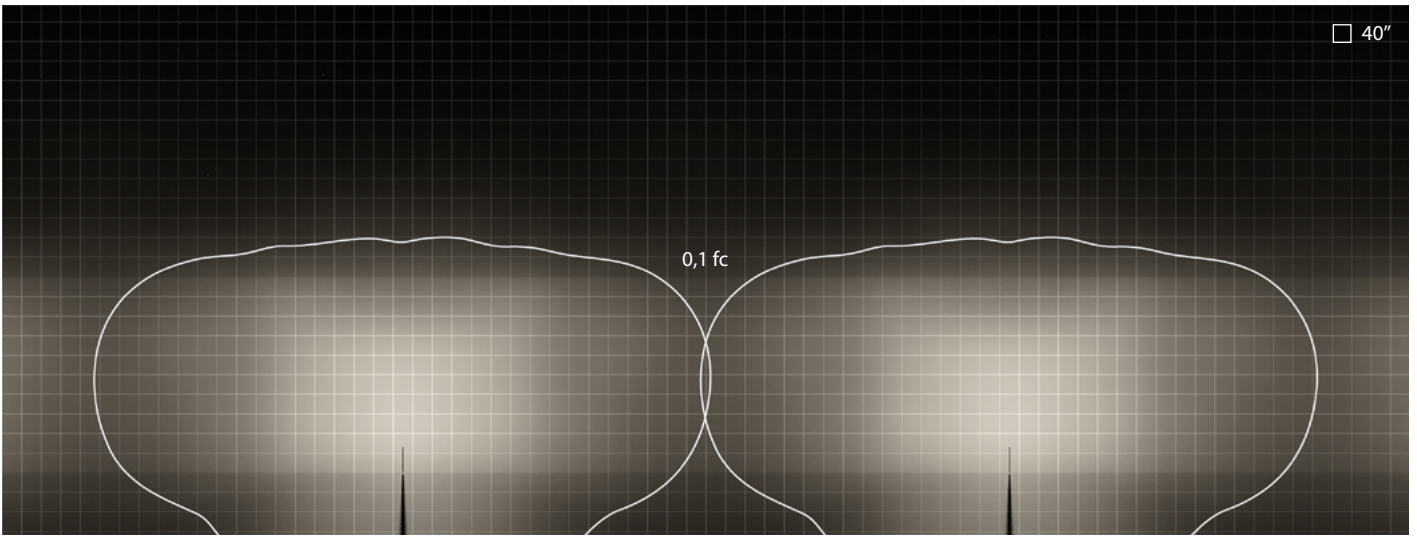

SYSTEMLINE+ | IESNA Type distribution | TYPE II | linear

Luminaire spacing = 118'1" (36m)
 Path depth = 26'3" (8m)
 Mounting height = 18'1" (5.5m)

PERFORMANCE
IN LIGHTING

powered by
GEWISS

PERFORMANCE IN LIGHTING
2621 Keys Pointe
Conyers, GA 30013 - United States
Ph 770.822.2115
Fax 770.822.9925

www.performanceinlighting.com