

QUASAR 30 CEILING



Ceiling mount series. Fixtures consist of:


- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and mounting plate.
- Micro-prismatic patterned flat, tempered silk-screened soda-lime glass diffuser.
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.
- High-efficiency COB, combined with an optimized passive cooling system, provides a long LED life.
- Internal specular reflector coated with 5-layers of PVD 99.98% pure aluminum providing >95% reflection.

- 90° x 95° beam angle (TECH)
- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Junction box mounting plate included (for 4" octagon box only, provided by others).
- Consult factory for dimming options, custom finishes (please specify RAL color), and non-cataloged CCT (Kelvin) options including static colors.
- Product meets Buy American Act requirements within ARRA.
- 5-year warranty.
- Marine Grade finish.
- Suitable for Natatorium applications.
- IDA DARK SKY Approved - 3000K and below



FINISHES

- AN-96 / Iron gray / Textured
- GR-94 / Aluminum metallic / Textured
- WH-87 / White / Textured
- BK-81 / Black / Textured
- RB-10 / Iron rust / Textured

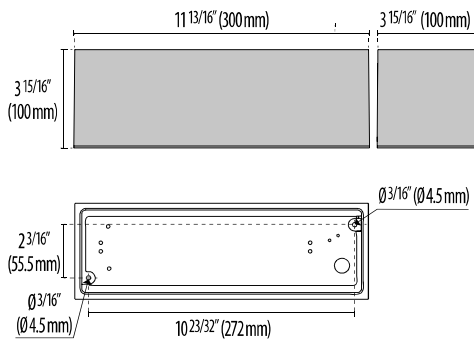

Scan here
for installation
instructions



QUASAR 30 CEILING

Lumen Output	27K	3K	35K	4K	5K
Quasar 30 Ceiling	1689	1756	1822	1889	1955

21W Max Wattage

Revision 05
03/24

Order Guide - Quasar 30 Ceiling



Order code example

Q30C-21-AM-27K-NA

Q30C-

Wattage	Finish	Kelvin	Voltage	Controls	Accessories
21W 21 watt (max) XX Specify Wattage Must be below max	AM Aluminum Metallic	27K 2700k	UNV 120-277V	NA Non Dimming	REM Remote Mounted Emergency Battery Back-Up CON2 (single-gang j-box, adaptor plate and 1/2" knockouts) CON4 (single-gang j-box, adaptor plate and 3/4" knockouts)
	IG Iron Gray	3K 3000k		0-10V 0-10V Dimming	
	IR Iron Rust	35K 3500k		ELV ELV Dimming	
	BK Textured Black	4K 4000k			
	WH Textured White	5K 5000k			
	CC Custom Color	BLU Static Blue			
		GRN Static Green			
		RED Static Red			
		RGBW RGBW Consult factory for control details			

Performance in Lighting reserves the right to make all necessary changes without prior notice.

Performance in Lighting - 2621 Keys Pointe - Conyers, Georgia 30013 - USA - voice 770.822.2115 - info.usa@pil.lighting
www.performanceinlighting.com

Revision 05
 03/24