



**HEDO+** | AREA LIGHTING

PRODUCT CODE

---

PROJECT

---

TYPE

---

PERFORMANCE  
**in** LIGHTING

powered by  
**GEWISS**



## Company

Performance in Lighting USA, located in Conyers, GA, is part of an international group of companies headquartered in Verona, Italy.

The group was formed from a number of well-established technical lighting companies from various countries. Performance in Lighting has a wide sales and distribution network operating in over 100 countries worldwide. Production facilities are located in Verona Italy, Bergamo Italy, Goslar Germany, Brussels Belgium, Conyers GA USA. Sales/distribution subsidiaries are located in England, Holland, France, Finland, Spain, Portugal, Australia, Dubai and Japan.

Recognized for its unique professional approach and technical know-how, Performance in Lighting has combined its international experience and technical expertise to become a worldwide leader in its industry. The group offers various lighting solutions worldwide for many applications including interior, exterior, residential, commercial, and sports lighting providing options to satisfy both architectural and engineering requirements.

Performance in Lighting USA concentrates on specification grade luminaires designed to provide a vast array of lighting solutions. Our concentration is outdoor products for illuminating commercial spaces from structural facades to parking areas. We strive to meet the demands of today's lighting community offering made in USA products, European designed with clean, contemporary aesthetics along with aggressive price points and fast lead times.

## Pronto Program


PERFORMANCE IN LIGHTING offers a wide range of quick ship fixtures through the Pronto Program and a host of options to fit within the unique budget of your next project.





## Overview

Click the QR-code for latest information.

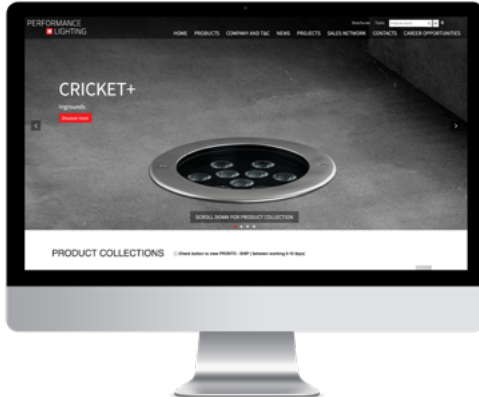

## Website

Please visit our web site [www.performanceinlighting.com/us/us/](http://www.performanceinlighting.com/us/us/) for the latest updated versions available.



## 5-year warranty

All products are covered by a 5-year warranty, provided that they are used and maintained according to instructions. Focus on quality, safety and product lifetime/longevity are the essential objectives of PERFORMANCE IN LIGHTING. For additional information, email [info.usa@pil.lighting](mailto:info.usa@pil.lighting)

# HEDO+

## Less is more

The HEDO+ transforms traditional lighting by blending contemporary designs with urban styles. This organic look delivers a powerful creative statement and, at the same time, low environmental impact. The exceptional minimalistic design will meld into most surroundings—a simple yet most effective lighting solution for your urban and residential projects. With proprietary optics and various lumen options, the Hedo+ FT offers precise and superb semi-cylindrical illumination. The discreet, clean form of HEDO+ is an architectural solution for practically every project you design.







# HEDO+

Area and site lighting series. Fixtures consist of:

## CONSTRUCTION

- Multi-step powder-coat painting process, optimized against UV rays and corrosion.
- Copper-free precision die-cast aluminum housing and top cap.
- Custom MCPCB utilized to maximize heat dissipation and promote long LED life.
- Micro-prismatic patterned, tempered, silk-screened, flat glass diffuser (HEDO+) and extra-clear, tempered, silk-screened, flat glass diffuser including high-transmittance transparent optics (HEDO+ FT).
- Custom molded, anti-aging gasket(s).
- Stainless steel external hardware.

## INSTALLATION

- Pre-wired factory sealed cable for external electrical connection included.

## OPTICS

- Type II (FT models only) and Type V light distributions.

## ELECTRICAL

- Input voltage: 120-277 V (50 / 60 Hz), integral 0-10 V dimming driver.
- Integral surge protector can withstand up to 10 kV transient line surge.

## OPTIONS

- The luminaire may be configured with numerous options and multiple standard finishes. Not all options are available in all configurations. Consult factory for more information about specification sheet details.

## LISTINGS

- UL Wet location listed. IP65 rated.
- Product meets Buy American requirements within ARRA.
- Photometric data measured according to UNI EN 13032-1/4 and IES LM-79-08
- The light distribution complies with the IESNA Full Cut-Off Classification and is eligible for all "Dark Sky" applications when aimed down.
- Actual performance may differ as a result of the end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications are subject to change without notice.

## WARRANTY

- 5-year limited warranty. Complete warranty terms located at [www.performanceinlighting.com](http://www.performanceinlighting.com)



HEDO+



HEDO+ FT





Flat microprismatic glass diffuser internally pattern




Electrical connection with outdoor rated plug & socket quick connector (IP66) that allows connection to mains without opening the luminaire




Painted die-cast aluminium pole-top adaptor for pole Ø 60 / 76 mm




Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution

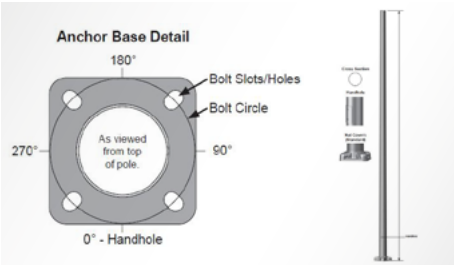

Poles are rated for 130mph (contact factory for poles with higher wind and weight ratings). Contact factory for additional pole heights and finishes, as well as banner arms and an integrated GFCI outlet option.






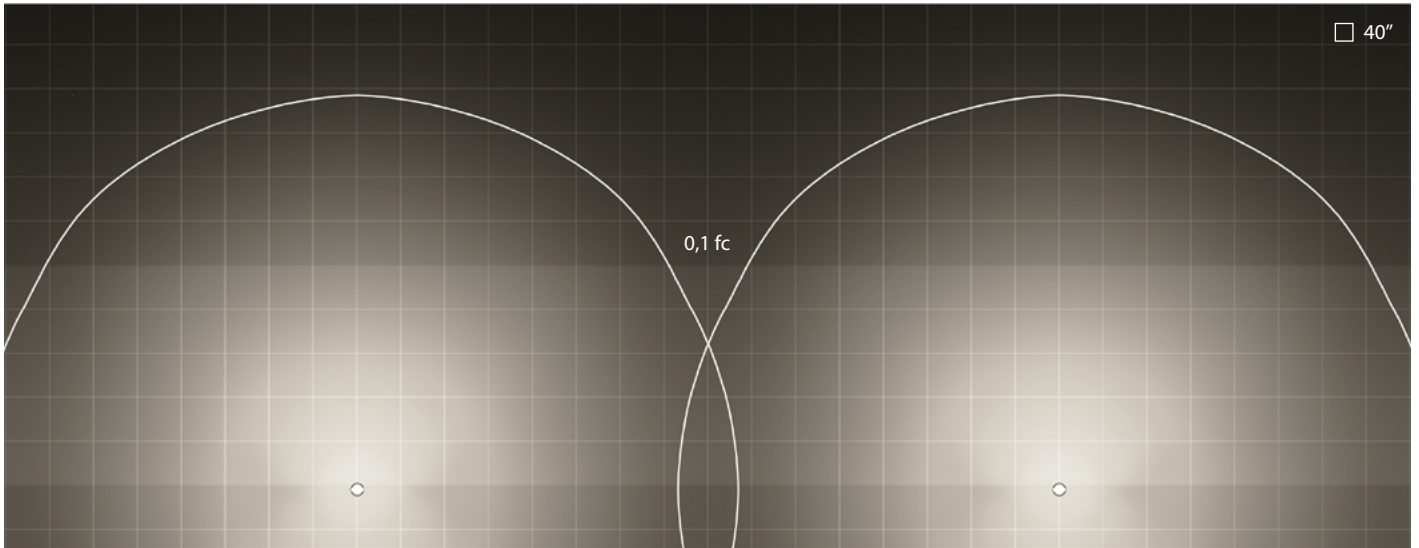


HEDO+ | TYPE V | linear

Luminaire spacing = 52' 5" (16m)  
 Path depth = 16' 4" (5m)  
 Mounting height = 9' 10" (3m)

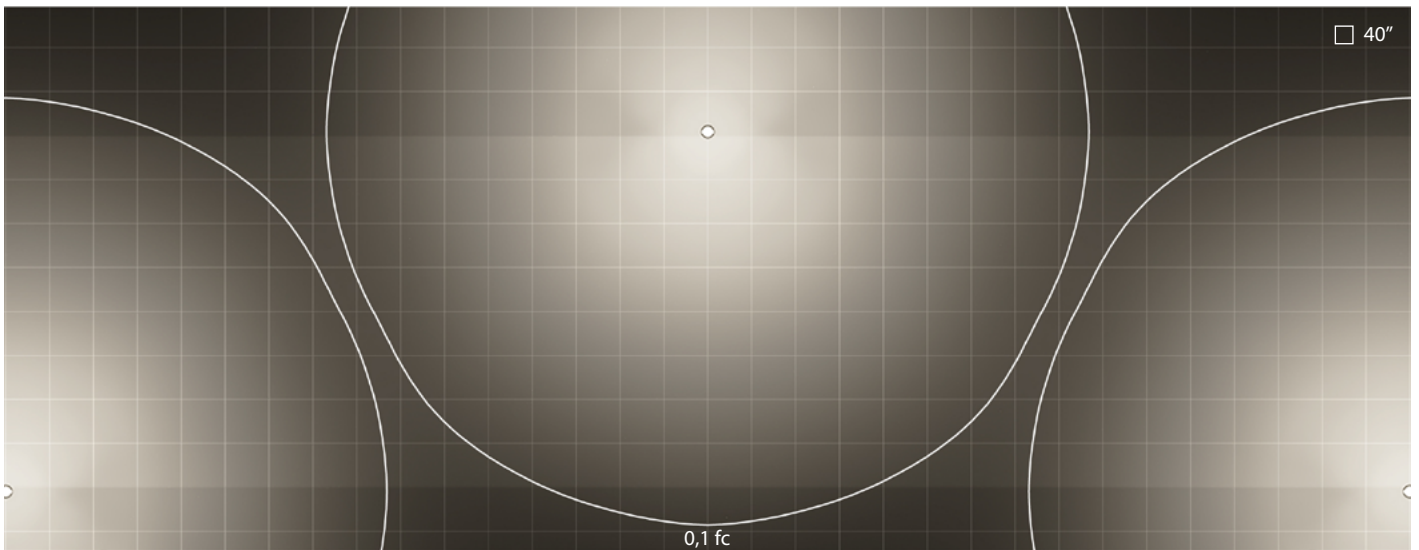

HEDO+ | TYPE V | qunconce

Luminaire spacing = 52' 5" (16m)  
 Path depth = 26' 2" (8m)  
 Mounting height = 9' 10" (3m)

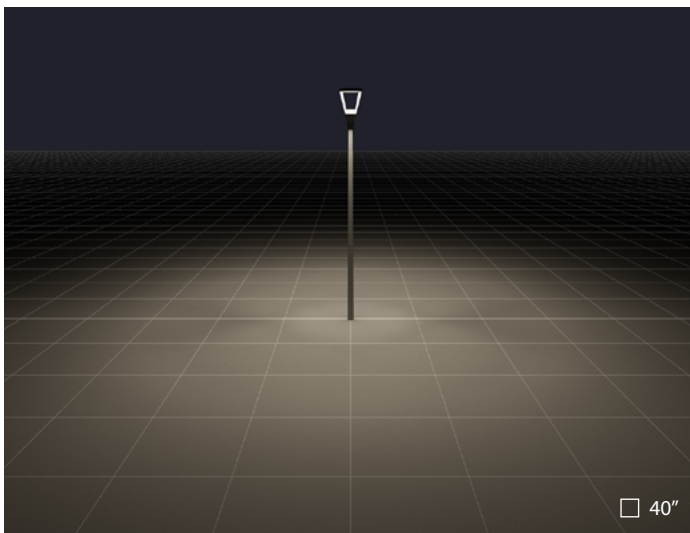

HEDO+ | Circular Extra-Wide optics | TYPE V

# HEDO+ FT



Extra-clear flat tempered glass diffuser




Electrical connection with outdoor rated plug & socket quick connector (IP66) that allows connection to mains without opening the luminaire




Painted die-cast aluminium pole-top adaptor for pole Ø 60 / 76 mm



Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution

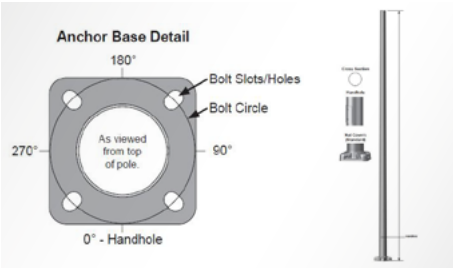


Poles are rated for 130mph (contact factory for poles with higher wind and weight ratings). Contact factory for additional pole heights and finishes, as well as banner arms and an integrated GFCI outlet option.






Jumeirah Lakes Towers | Dubai | EAU

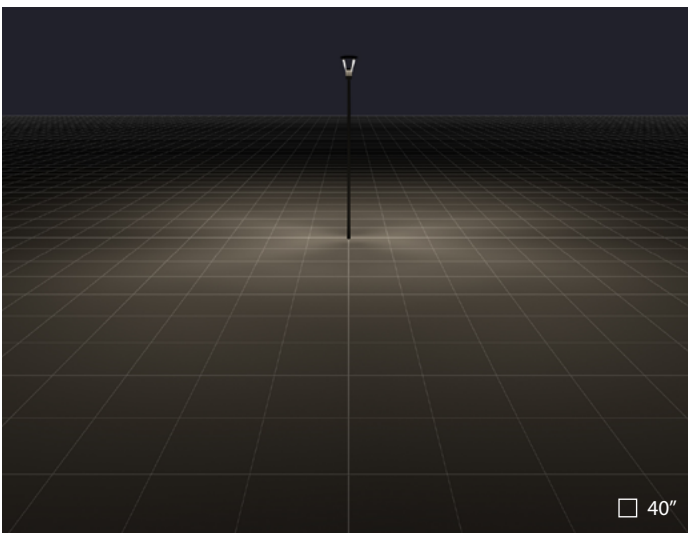

HEDO+ FT | Circular Extra-Wide optics | TYPE V

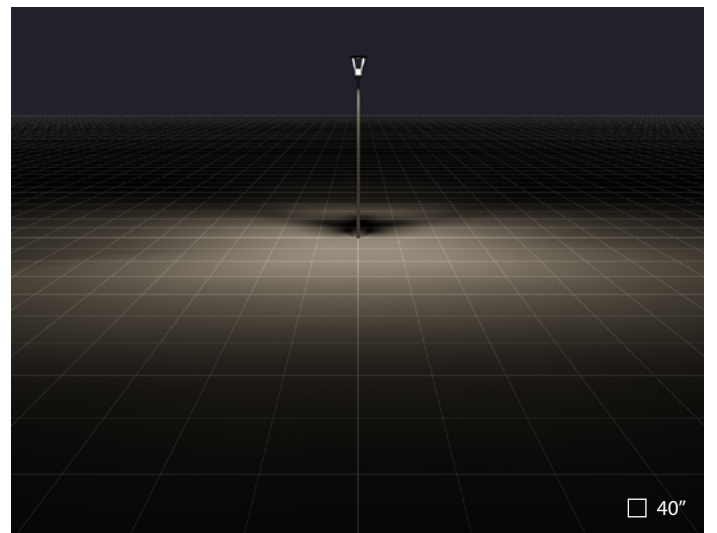

HEDO+ FT | IESNA Type distribution | TYPE II

PERFORMANCE  
**IN** LIGHTING

powered by  
**GEWISS**

**PERFORMANCE IN LIGHTING**  
2621 Keys Pointe  
Conyers, GA 30013 - United States  
Ph 770.822.2115  
Fax 770.822.9925

[www.performanceinlighting.com](http://www.performanceinlighting.com)